



High performance ropes



Our Company

REGATTA YACHT ROPES, with more than 30 years of experience in the nautical sector, together with the latest generation technology used in our production process, enjoys a well-deserved recognition at the national and international level and benchmark and trustworthy brand of athletes from different disciplines. The company has a long history that supports our products.

Founded by Mr José Luís Medina in 1987, today the company continues to uphold the values that the founding partner always transmitted to his team, although it has become even more professional in all areas of the company: production, marketing, administration, as well as the direction and management of the company, which makes us even stronger and more competitive, while maintaining the seal and identity of the founding partner that we have always characterized. We follow the quality standards and the production process endorsed by obtaining ISO-9001 and the homologation of our duly calibrated and certified ropes.

The product of the REGATTA brand is of the highest quality, we have fibers of the highest performance such as Technora®, Vectran®, Kevlar®, Dyneema®, Cordura®, Nomex® and other more conventional

fibers as Polyester, Polypropylene or Nylon that follow us to develop any type of rope for different sectors: nautical, sport or industry.

Thanks to the latest technology, to the research of our I+D+I department and our excellent and professional team in creativity, development, manufacturing, technical advice and after-sales service, we can satisfy all kind of request from our customers manufacturing personalized designs.

From its beginnings, REGATTA YACHT ROPES maintains a firm commitment with the environment. During our manufacturing process, we use energy-saving control systems which ensure the health of our company and our environment, as well as the recycling of the materials used in the production process.

REGATTA YACHT ROPES does not use other trademarks and thanks to our design, innovation and technology, intrinsic values of our brand we will be recognized and differentiated. Our commitment to the customer is maximum, paying close attention to their needs, adapting to the particular request of each one.

GROWING UP TOGETHER

Support

+34 937 521 764
+34 687 418 999

Timetable

Monday to Thursday
from 8am to 13.30pm - 15.30 to 18pm
Friday from 7am to 15pm





Our Quality

All our ropes are created and developed with the strictest quality controls and with the latest and sophisticated technology of the market.

The yellow/grey mark is a symbol and guarantee of our products.

The REGATTA YACHT ROPES - Star Mar, SA Quality Management System is certified for achieving the ISO 9001:2015 requirements.

MADE IN SPAIN

BARCELONA

The yellow/grey mark is symbol and guarantee of our products.



Technical terms

REGATTA CS
Coating System



It is a special polyethylene coating treatment that allows us to improve the abrasion and UV resistance.

REGATTA HSS
Heat Stretch System



It is a technical procedure which consists in heating and tightening the rope in order to achieve a high breaking strength and a minimum stretch.

Fibers

Dyneema®

Vectran®

CORDURA®

technora®
Aramid Fiber

CORDEX

Kevlar® **OUTPOND®**

LUMAT
LUMAT® FIBER SOLUTIONS

01

America's Cup line

- 10 Olympus
- 11 Ocean Race
- 12 Platinum-90
- 13 Oceanic Vectran
- 14 Kevlar Competition
- 15 Dynatron Plus
- 16 Regatta Reflective
- 17 Marina-Pro
- 18 Burton SK-90

02

Protection Covers

- 20 Dyneema Protect
- 20 Technora Protect
- 21 Vectran Protect
- 21 Kevlar/Polyester HT Protect
- 22 Technora/Polyester HT Protect
- 22 Polyester HT Protect

03

Performance Line

- 24 Futura
- 24 Atlanta
- 25 Racing
- 25 Vectran Virginia
- 26 Betsy Competición
- 26 Yuca
- 27 Marbella
- 27 Bali
- 28 Spring Sport
- 28 Alaska
- 29 Albany
- 29 Lua

04

Cruising

- 32 Gregal
- 32 Elba
- 33 Darwin
- 33 Eyre
- 34 Titanic Color
- 34 Titanic
- 35 Lyon
- 35 Black Sea
- 36 Windy
- 36 Harbour
- 37 Lena
- 37 Bora Bora
- 38 Star Cup
- 38 Star Cup Color
- 39 Sira
- 39 Regatta Color
- 40 Top Sea
- 40 Xaloc Color

05

Dinghy

- 42 Mónaco
- 42 Dynacord
- 43 Dynatec
- 43 Marine Plus
- 44 Super Hobie F-18
- 44 Dyna Speed
- 45 Excel Vectran
- 45 Omega
- 46 Caribe Mix
- 46 Evelyn
- 47 Bouvet
- 47 Breta
- 48 Hobie Competition
- 48 Sea Red
- 49 Sea Blue

06

Mooring

- 52 Polyester Rope
- 52 Auckland
- 53 Brisbane
- 53 New Port-Elastic
- 54 Round Line
- 54 Squaline
- 55 Regatta Classic
- 55 Regatta 3-S
- 56 Top Classic
- 56 Top Classic 3-C



07

Sail Maker

- 58 Polyester Webbing
- 58 Regatta Dynema Webbing
- 59 Regatta Anti-Torsion
- 59 Lazy Jack
- 60 Compact Line
- 60 Compact Line Dyneema
- 61 Compact Line Aramida
- 61 Kevlar Aramida

08

Multipurpose

- 64 Super Round
- 64 Polyester Braided Color
- 65 Fender Rope
- 65 Xaloc Multipurpose
- 65 Liferaft Rope
- 66 Floating Haytex
- 66 Ski Nautic
- 67 Shock-Cord
- 67 Shock-Cord Reflective
- 68 Elastic Color
- 68 Sandow Color PP
- 69 Lead Rope
- 69 Textile Shackle

09

70 Rigging Service

10

74 Safety Nets

75 Assorted Boxes

78 Threads and Crafts

Sport

- 80 Kitesurf
- 81 Paragliding
- 82 Balloons
- 83 Parasailing

Others

- 84 Off-road
- 85 Decoration
- 85 Agrorope
- 86 Performing arts
- 87 Horse Riding
- 87 Height Work
- 88 Outdoor Areas
- 88 Arboriculture
- 89 Industry
- 91 Technical Accessories
- 93 Display Racks





01 America's Cup Line



Olympus

REF. 09035

HALYARD/SHEET

Cover: Mixed composition: Vectran®, Cordura®, Dyneema® SK-90 and Spun-dyed Polyester HT with UV protection.

Core: 100% Dyneema® SK-90, Coating, Heat Stretch System.

Recommended use: perfect for halyard , sheet and control lines.

Working stretch: < 1%.

Ø mm: 6 to 16.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 6 | 2747 | 100 |
| 8 | 5315 | 100 |
| 10 | 6828 | 100 |
| 12 | 10150 | 100 |
| 14 | 12720 | 100 |
| 16 | 16300 | 100 |

*Dyneema® SK-99 on request.



Brown/Beige/Black



Fuchsia/Beige/Lilac



Turquoise/Beige/Blue



Red/Beige/Black



Pistachio/Beige/Green



Orange/Beige/Black

Dyneema®



Vectran®



Ocean Race

REF. 09090

HALYARD/SHEET



Black



Beige



Beige /Black

Construction: double braided / 8 to 14mm: 32-plaited 1:1.

Core: Dyneema® SK-90, Coating, Heat Stretch System.

Cover: Technora®.

Features: excellent grip and high resistance to high temperatures when passing through the blocks and winches.

Recommended use: ideal rope for sheet, brace and control lines.

Working stretch: <1%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 8 | 5010 | 100 |
| 10 | 6630 | 100 |
| 12 | 9860 | 100 |
| 14 | 11720 | 100 |

*Other diameters on request.

*Dyneema® SK-99 on request.

Dyneema®



REGATTA HSS
Heat Stretch System

REGATTA CS
Coating System

technora®
The Power of Nature



Platinum-90

HALYARD/SHEET

REF. 09099

Construction: double braided / 8 to 16mm: 32-plaited 1:1.
Core: Dyneema® SK-90, Coating, Heat Stretch System.
Cover: Technora® and Spun-dyed Polyester HT with UV protection.
Features: high abrasion resistance and great grip in jamming cleats and winches.
Recommended use: excellent for sheet, brace and control lines.
Working stretch: <1%.


| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 8 | 5010 | 100 |
| 10 | 6630 | 100 |
| 12 | 9860 | 100 |
| 14 | 11720 | 100 |
| 16 | 16300 | 100 |

*Other diameters and lengths on request.
*Dyneema® SK-99 on request.



REGATTA HSS
Heat Stretch System

REGATTA CS
Coating System



Oceanic Vectran

REF. 09060


HALYARD/SHEET



Construction: double braided / 8 to 16mm: 32-plaited 1:1.
Core: Dyneema® SK-90, Coating, Heat Stretch System.
Cover: Vectran® and Spun-dyed Polyester HT with UV protection.
Features: good fusion between core and cover, low elasticity and extremely resistance to high temperatures up to 300°C.
Recommended use: ideal rope for halyard, runner and textile backstay.
Working stretch: <1%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 8 | 5010 | 100 |
| 10 | 6630 | 100 |
| 12 | 9860 | 100 |
| 14 | 11720 | 100 |
| 16 | 16300 | 100 |

*Other diameters on request.
*Dyneema® SK-99 on request.



REGATTA HSS
Heat Stretch System

REGATTA CS
Coating System

Vectran



Kevlar Competición

HALYARD/SHEET

REF. 09070

Construction: double braided / 8 to 16mm: 32-plaited 1:1.

Core: Dyneema® SK-90, Coating, Heat Stretch System.

Cover: Kevlar® and Spun-dyed Polyester HT with UV protection.

Features: high resistance to graze and temperature above 400°C. Excellent grip.

Recommended use: perfect for halyard, sheet and runner.


Working stretch: <1%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 8 | 5010 | 100 |
| 10 | 6630 | 100 |
| 12 | 9860 | 100 |
| 14 | 11720 | 100 |
| 16 | 16300 | 100 |

*Dyneema® SK-99 on request.



Yellow/Brown



Yellow/Turquoise



Yellow/Grey



Yellow/Red



Yellow/Green



Yellow/Lilac



Yellow/Black

REGATTA HSS
Heat Stretch System

REGATTA CS
Coating System

Dyneema®



Kevlar® DUPONT



Dynatron Plus

REF. 09018

SHEET



Black/Beige/White




Black/Grey/White



Black/Yellow/White



Black/Orange/White



Black/Green/White



Black/Turquoise/White



Black/Red/White

Construction: double braided / 6mm: 16-plaited 1:1 - 8 to 16mm:32-plaited 1:1.

Core: Dyneema® SK-90, Coating, Heat Stretch System.

Cover: Cordura® with Technora® and Spun-dyed Polyester HT with UV protection.

Features: the mix of these fibers makes this rope an excellent and high performance sheet with low stretch.

Recommended use: ideal rope as a halyard, sheet, brace and control lines.

Working stretch: <1%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 6 | 2590 | 100 |
| 8 | 5010 | 100 |
| 10 | 6630 | 100 |
| 12 | 9860 | 100 |
| 14 | 11720 | 100 |
| 16 | 16300 | 100 |

*Dyneema® SK-99 on request.

Dyneema®



REGATTA HSS
Heat Stretch System

REGATTA CS
Coating System

technora®
The Power of Aromatic

CORDURA®



Regatta Reflective

HALYARD/SHEET

REF. 09080



Construction: double braided / 8 to 16mm: 32-plaited 1:1.
Core: Dyneema® SK-90, Coating, Heat Stretch System.
Cover: Spun-dyed Polyester HT with UV protection.
Features: excellent night vision for its reflective line and high resistance to abrasion for its special twisted yarn.
Recommended use: perfect as a halyard, sheet, downhaul and tack.
Working stretch: <1%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 8 | 5010 | 100 |
| 10 | 6630 | 100 |
| 12 | 9860 | 100 |
| 14 | 11720 | 100 |
| 16 | 16300 | 100 |

*Other diameters on request.
*Dyneema® SK-99 on request.

REGATTA HSS
Heat Stretch System

REGATTA CS
Coating System

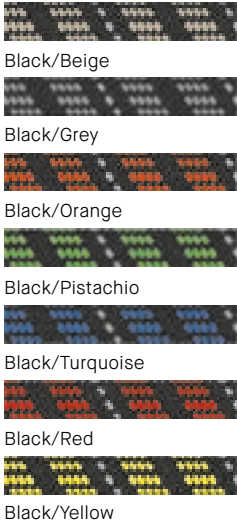

Marina-Pro

REF. 09040

HALYARD/SHEET



Beige/Red



Beige/Brown



Beige/Orange



Beige/Navy



Beige/Lilac



Beige/Green



Beige/Turquoise



Beige/White

Construction: double braided / 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 1:1.

Core: Dyneema® SK-90, Coating, Heat Stretch System.

Cover: Spun-dyed Polyester HT with UV protection.

Features: very light, great touch and high abrasion resistance.

Recommended use: excellent rope as a halyard, sheet, downhaul and tack.

Working stretch: <1%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 6 | 2590 | 100 |
| 8 | 5010 | 100 |
| 10 | 5482 | 100 |
| 12 | 9860 | 100 |
| 14 | 11720 | 100 |
| 16 | 16300 | 100 |

*Dyneema® SK-99 on request.

*Other colours on request.

Dyneema®



REGATTA HSS
Heat Stretch System

REGATTA CS
Coating System



Burton SK-90

HALYARD/SHEET

REF. 02016

Construction: double braided / 8 to 16mm: 32-plaited 1:1.
Core: Dyneema® SK-90, Coating, Heat Stretch System.
Cover: Dyneema® SK-78 and Spun-dyed Polyester HT with UV protection.
Features: high resistance to abrasion and good grip.
Recommended use: ideal halyard/sheet for competition with excellent results.
Working stretch: <1%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 8 | 5010 | 100 |
| 10 | 6630 | 100 |
| 12 | 9860 | 100 |
| 14 | 11720 | 100 |
| 16 | 16300 | 100 |

*Dyneema® SK-99 on request.



REGATTA HSS
Heat Stretch System

REGATTA CS
Coating System



02 Protection Covers



Dyneema®

Dyneema Protect

REF. 07080

MULTIPURPOSE

Construction: simple braided / 4 to 20mm: 32-plaited 1:1.

Composition: Dyneema® SK-78.

Features: waterproof cover, very light and easy to splice.

Recommended use: ideal for loops and sheaves.



White



Black

| Ø MM | LENGTH (MTS) |
|-------|--------------|
| 4-6 | 50/100 |
| 7-10 | 50/100 |
| 9-13 | 50/100 |
| 14-20 | 50/100 |

technora®
The Essential of Endless

Technora Protect

REF. 07060

MULTIPURPOSE

Construction: simple braided / 4 to 20mm: 32-plaited 1:1.

Composition: Technora®.

Features: easy to splice, high resistance to the cut and at high temperatures up to 400°C.

Recommended use: ideal protection against the abrasion when passing through the blocks and winches.



Black



Beige



Beige/Beige

| Ø MM | LENGTH (MTS) |
|-------|--------------|
| 4-6 | 50/100 |
| 7-10 | 50/100 |
| 9-13 | 50/100 |
| 14-20 | 50/100 |

Vectran Protect

REF. 07050

MULTIPURPOSE

Vectran



Beige

Construction: simple braided / 4 to 20mm: 32-plaited 1:1.

Composition: Vectran®.

Features: very light and extremely resistance to high temperatures up to 300°C.

Recommended use: thanks to its low coefficient of friction, is a perfect solution to protect and maximize the rope performance which are in a continuous friction.



| Ø MM | LENGTH (MTS) |
|-------|--------------|
| 4-6 | 50/100 |
| 7-10 | 50/100 |
| 9-13 | 50/100 |
| 14-20 | 50/100 |

Kevlar/Polyester HT Protect

REF. 70700

MULTIPURPOSE

Kevlar **POLYESTER**



Yellow/Turquoise



Yellow/Green



Yellow/Black



Yellow/Orange



Yellow/Lilac

Construction: simple braided / 4 to 20mm: 32-plaited 1:1.

Composition: Kevlar® and Spun-dyed Polyester HT with UV protection.

Features: easy to splice, high abrasion resistance and good grip.

Recommended use: excellent protection when passing through the blocks and winches.



| Ø MM | LENGTH (MTS) |
|-------|--------------|
| 4-6 | 50/100 |
| 7-10 | 50/100 |
| 9-13 | 50/100 |
| 14-20 | 50/100 |

*Other colours on request.





Technora/Polyester HT Protect

MULTIPURPOSE

REF. 70800

Construction: simple braided / 4 to 20mm: 32-plaited 1:1.

Composition: Technora® and Spun-dyed Polyester HT with UV protection.

Features: high abrasion resistance and easy to splice.

Recommended use: ideal cover when passing through the winches and stoppers.

| Ø MM | LENGTH (MTS) |
|-------|--------------|
| 4-6 | 50/100 |
| 7-10 | 50/100 |
| 9-13 | 50/100 |
| 14-20 | 50/100 |

*Other colours on request.



Black/Red



Black/Turquoise



Black/Green



Black/Yellow



Black/Grey

Polyester HT Protect

MULTIPURPOSE

REF. 07070

Construction: simple braided / 4 to 20mm: 32-plaited 1:1.

Composition: Spun-dyed Polyester HT with UV protection.

Features: easy to splice and good abrasion resistance.

Recommended use: perfect cover for any repair of halyard and sheet.

| Ø MM | LENGTH (MTS) |
|-------|--------------|
| 4-6 | 50/100 |
| 7-10 | 50/100 |
| 9-13 | 50/100 |
| 14-20 | 50/100 |

*Other colours on request.



Black/Red



Black/Turquoise



Black/Green



Black/Yellow



Black/Grey



Black/Orange

03 Performance Line



Futura

REF. 02018

HALYARD/SHEET

Construction: double braided / 6 mm : 16 plaited 1:1 - 8 to 16 mm : 32 plaited 1:1.

Core: Dyneema® SK-78, Coating, Heat Stretch System.

Cover: Polyester HT, Color TM and UV protection.

Features: good touch, high resistance to abrasion and light.

Recommended use: Excellent as a halyard, sheet, counter control ropes and tack.

Working stretch: < 1%

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 6 | 1600 | 100 |
| 8 | 4100 | 100 |
| 10 | 6100 | 100 |
| 12 | 8100 | 100 |
| 14 | 10200 | 100 |
| 16 | 15200 | 100 |

*On request until 20mm.



Black/Yellow



Black/White



Black/Green



Black/Orange



Black/Grey



Black/Navy



Black/Red



Black/Beige

Dyneema®



Atlanta

REF. 02004

HALYARD

Construction: double braided / 2 to 6mm: 16-plaited 1:1 - 8 to 14mm: 32-plaited 2:2.

Core: Dyneema® SK-78. From 8mm additional braided Polyester Spun.

Cover: Spun-dyed Polyester HT with UV protection.

Features: good durability and extremely light.

Recommended use: perfect as a halyard/sheet and control lines.

Working stretch: <1.5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 2 | 240 | 250 |
| 2.5 | 280 | 250 |
| 3 | 395 | 250 |
| 4 | 750 | 250 |
| 5 | 1050 | 250 |
| 6 | 2200 | 200 |
| 8 | 3800 | 200 |
| 10 | 5000 | 200 |
| 12 | 6128 | 200 |
| 14 | 9500 | 150 |

*On request until 20mm.

Dyneema®



Navy/Beige



Navy/Grey



Navy/Yellow



Navy/Orange



Navy/Pistachio



Navy/Red



Navy/White



Navy/Turquoise

Dyneema®



Black



Grey



Beige



Navy



Red



Turquoise



Green



Orange



Yellow

Racing

REF. 00998

HALYARD/SHEET

Construction: double braided / 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 1:1.

Core: Dyneema® SK-78. From 10mm additional braided Polyester Spun.

Cover: Spun-dyed Polyester HT with UV protection.

Features: great touch and highly resistance to abrasion.

Recommended use: perfect as a halyard/sheet and control lines.


Working stretch: <1.5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 6 | 2200 | 200 |
| 8 | 3800 | 200 |
| 10 | 5000 | 200 |
| 12 | 6128 | 200 |
| 14 | 9500 | 150 |
| 16 | 11500 | 100 |

*On request until 20mm.



Vectran®



Turquoise/Yellow



Red/Black



Pistachio/Brown



Orange/Grey



Navy/Beige

Vectran Virginia

REF. 00196

HALYARD

Construction: double braided / 1.5 to 6mm: 16-plaited 1:1 - 8 to 14mm: 32-plaited 1:1.

Core: Vectran®. From 8mm additional braided Polyester Spun.

Cover: Spun-dyed Polyester HT with UV protection.

Features: high performance rope, good grip in jamming cleats and low stretch.

Recommended use: ideal for halyard, sheet, brace and backstay.

Working stretch: <1%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 1.5 | 150 | 250 |
| 2 | 200 | 250 |
| 2.5 | 260 | 250 |
| 3 | 380 | 250 |
| 4 | 740 | 250 |
| 5 | 850 | 250 |
| 6 | 1200 | 200 |
| 8 | 2400 | 200 |
| 10 | 3500 | 200 |
| 12 | 5000 | 200 |
| 14 | 6300 | 150 |



Bensy Competición

REF. 00992

HALYARD/SHEET

Dyneema®

Construction: double braided / 1 to 6mm: 16-plaited 1:1 - 8 to 14mm: 32-plaited 1:1.

Core: Dyneema® SK-78. From 10mm additional braided Polyester Spun.

Cover: Spun-dyed Polyester HT with UV protection.

Features: high abrasion resistance and great touch.

Recommended use: perfect as a halyard and topping lift.

Working stretch: <1.5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 1 | 40 | 250 |
| 1.5 | 120 | 250 |
| 2 | 200 | 250 |
| 2.5 | 225 | 250 |
| 3 | 280 | 250 |
| 4 | 750 | 250 |
| 5 | 1050 | 250 |
| 6 | 2200 | 200 |
| 8 | 3800 | 200 |
| 10 | 5000 | 200 |
| 12 | 6128 | 200 |
| 14 | 9500 | 150 |

*On request until 20mm.



White/Beige



White/Grey



White/Red




White/Yellow



White/Pistachio



White/Orange



White/Turquoise

Yuca

REF. 02029

HALYARD

Dyneema®

Cover: Spun-dyed Polyester HT with UV protection, special torsion and abrasion resistance.

Core: Dyneema® SK-78 and Polyester HT mixed.

Recommended use: perfect as a Halyard for cruising, competition and dinghy.

Working stretch: <3%

Ø mm: from 6 to 16mm

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 6 | 1216 | 200 |
| 8 | 2072 | 200 |
| 10 | 3784 | 200 |
| 12 | 4961 | 200 |
| 14 | 6673 | 150 |
| 16 | 8099 | 100 |

*On request until 20mm.



Grey/Multicolor



Red/Multicolor



Brown/Multicolor



Beige/Multicolor



Navy/Multicolor



Pistachio/Multicolor



Yellow/Multicolor



Turquoise/Multicolor



White/Multicolor



Black/Multicolor



Orange/Multicolor

Dyneema®



Orange/Black/White



Turquoise/Black/White



Yellow/Black/White



Grey/Black/White



Lilac/Negro/White



Beige/Black/White



Red/Black/White



Pistachio/Black/White

Marbella

REF. 07019

HALYARD

Cover: Spun-dyed Polyester HT with UV protection, special torsion and abrasion resistance.

Core: Mixed composition Haytex® and Dyneema® SK-78. No water absorption (Damp-proof)

Recommended use: Excellent halyard for racing, cruising competition and control lines.

Working stretch: <3%

Ø mm: From 4 to 14mm

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 510 | 250 |
| 5 | 849 | 250 |
| 6 | 1216 | 200 |
| 7 | 1438 | 200 |
| 8 | 1994 | 200 |
| 10 | 2966 | 200 |
| 12 | 3554 | 200 |
| 14 | 4347 | 150 |



Dyneema®



Orange/Yellow



Beige/Brown



Pistachio/Green



Red/Black



White/Lilac



Grey/Black



Turquoise/Black

Bali

REF. 00550

SHEET

Cover: Spun-dyed Polyester HT with UV protection, special torsion and abrasion resistance.

Core: Mixed Polyester HT with Dyneema® SK-78. Low stretch.

Recommended use: Ideal rope as a Main sheet and spinnaker for racing, cruising and dinghy.

Working stretch: <3%

Ø mm: From 4 to 14mm

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 510 | 250 |
| 5 | 849 | 250 |
| 6 | 1216 | 200 |
| 7 | 1438 | 200 |
| 8 | 1994 | 200 |
| 10 | 2966 | 200 |
| 12 | 3554 | 200 |
| 14 | 4347 | 150 |



Spring Sport

REF. 08083

HALYARD

Dyneema®

Construction: double braided / 4 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 1:1.

Core: Dyneema® SK-78 and Haytex® HT. From 10mm additional braided Polyester Spun.

Cover: Spun-dyed Polyester HT with UV protection.

Features: comfortable touch, very light and high abrasion resistance.

Recommended use: excellent as a halyard/sheet for cruising and competition.

Working stretch: <3%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 590 | 250 |
| 5 | 922 | 250 |
| 6 | 1284 | 200 |
| 8 | 2140 | 200 |
| 10 | 3852 | 200 |
| 12 | 5029 | 200 |
| 14 | 6741 | 150 |
| 16 | 8667 | 100 |

*On request until 20mm.



Yellow/Grey



Grey/Red



Lilac/Pistachio



Brown/Beige



Black/Grey



Navy/Turquoise

Alaska

REF. 00994

HALYARD

Dyneema®

Construction: double braided / 4 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 1:1.

Core: Dyneema® SK-78 and Polyester HT. From 10mm additional braided Polyester Spun.

Cover: Spun-dyed Polyester HT with UV protection.

Features: great touch and long life.

Recommended use: ideal halyard/sheet for cruising, regattas, competition and control lines.

Working stretch: <3%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 570 | 250 |
| 5 | 902 | 250 |
| 6 | 1216 | 200 |
| 8 | 2072 | 200 |
| 10 | 3784 | 200 |
| 12 | 4961 | 200 |
| 14 | 6673 | 150 |
| 16 | 8599 | 100 |

*On request until 20mm.



Orange



Brown



Black



Navy



Grey



Red



Green



Beige



Yellow

Dyneema®



Grey



Orange



Pistachio



Brown



Turquoise



Lilac



Navy

Albany

REF. 02115

SHEET

Construction: double braided / 4 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 1:1.

Core: Dyneema® SK-78 and Polyester HT. From 10mm additional braided Polyester Spun.

Cover: Spun-dyed Polyester HT with UV protection.

Features: good grip in winches and jamming cleats.

Recommended use: excellent quality as halyard/sheet in regattas and cruising.

Working stretch: <3%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 570 | 250 |
| 5 | 902 | 250 |
| 6 | 1216 | 200 |
| 8 | 2072 | 200 |
| 10 | 3784 | 200 |
| 12 | 4961 | 200 |
| 14 | 6673 | 150 |
| 16 | 8599 | 100 |

*Other colours on request.



Dyneema®



Grey/Black



Grey/Brown



Grey/Green



Grey/Red



Grey/Yellow



Grey/Turquoise



Grey/Navy

Lua

REF. 04010

HALYARD

Construction: double braided / 4 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 1:1.

Core: Dyneema® SK-78 and Haytex® HT. From 10mm additional braided Polyester Spun.

Cover: Spun-dyed Polyester HT with UV protection.

Features: very light, few stretch and highly resistance to abrasion.

Recommended use: perfect rope for halyard/sheet, multipurpose and control lines.

Working stretch: <3%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 590 | 250 |
| 5 | 922 | 250 |
| 6 | 1284 | 200 |
| 8 | 2140 | 200 |
| 10 | 3852 | 200 |
| 12 | 5029 | 200 |
| 14 | 6741 | 150 |
| 16 | 8667 | 100 |





04 Cruising



Gregal

REF. 02402

HALYARD

Construction: double braided/ 4 to 6 mm: 16 plaited 1:1 - 8 to 16 mm: 32 plaited 1:1

Cover: Polyester HT, Color TM and protection UV.

Core: polyester HT.

Features: high resistance to abrasion and good touch.

Recommended use: perfect for competition, cruising and dinghy.

Working stretch: <5%

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 380 | 250 |
| 5 | 600 | 250 |
| 6 | 800 | 200 |
| 7 | 1050 | 200 |
| 8 | 1600 | 200 |
| 10 | 2345 | 200 |
| 12 | 3500 | 200 |
| 14 | 4500 | 150 |
| 16 | 5000 | 100 |



Red/Black/Grey



Orange/Black/Grey



Yellow/Black/Grey



Green/Pistachio/Grey



Blue/Turquoise/Grey



Fuchsia/Lilac/Grey



Brown/Beige/Grey



Black/Grey/White

Elba

REF. 02230

HALYARD

Construction: Double braided / 4 to 6mm: 16-plaited 1:1 and 8 to 16mm: 32-plaited 2:2

Core: Polyester 100% HT.

Cover: Spun-dyed Polyester HT, color TM, with UV protection.

Recommended use: Perfect halyard for cruising, dinghy and multipurpose.

Working stretch: <5%

Ø mm: from 5 to 16

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 370 | 250 |
| 5 | 600 | 250 |
| 6 | 800 | 200 |
| 8 | 1600 | 200 |
| 10 | 2500 | 200 |
| 12 | 3500 | 200 |
| 14 | 4500 | 150 |
| 16 | 5000 | 100 |



Yellow/Orange



Yellow/Brown



Pistachio/Green



Lilac/Fuchsia



Turquoise/White



Turquoise/Black



Beige/Brown



Grey/Red

Darwin

REF. 07006

HALYARD



Navy/Beige



Navy/Grey



Navy/Yellow



Navy/Orange



Navy/Pistachio



Navy/Turquoise



Navy/Red



Navy/White

Construction: double braided / 4 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 2:2.

Core: Polyester HT.

Cover: Spun-dyed Polyester HT with UV protection.

Features: easy to splice and non-slip.

Recommended use: excellent for cruising and control lines.

Working stretch: <5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 370 | 250 |
| 5 | 600 | 250 |
| 6 | 814 | 200 |
| 8 | 1600 | 200 |
| 10 | 2503 | 200 |
| 12 | 3500 | 200 |
| 14 | 4500 | 150 |
| 16 | 5000 | 100 |

*On request until 20mm.



Eyre

REF. 07012

HALYARD



Beige



Red



Navy



Grey



Turquoise



Brown



Pistachio



Black



Yellow



Orange

Construction: double braided / 4 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 2:2.

Core: Polyester HT.

Cover: Spun-dyed Polyester HT with UV protection.

Features: excellent grip on winches and jamming cleats. Soft touch.

Recommended use: ideal as a halyard/sheet and multipurpose.

Working stretch: <5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 370 | 250 |
| 5 | 600 | 250 |
| 6 | 800 | 200 |
| 8 | 1416 | 200 |
| 10 | 2503 | 200 |
| 12 | 3500 | 200 |
| 14 | 4500 | 150 |
| 16 | 5000 | 100 |

*On request until 20mm.

*Other colours on request.



Titanic Color

HALYARD

REF. 00604

Construction: double braided / 4 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 2:2.

Core: Polyester HT.

Cover: Spun-dyed Polyester HT with UV protection.

Features: non-slip in stoppers, high resistant and quality.

Recommended use: perfect rope for cruising, dinghy and multipurpose.

Working stretch: <5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 370 | 250 |
| 5 | 600 | 250 |
| 6 | 800 | 200 |
| 8 | 1600 | 200 |
| 10 | 2500 | 200 |
| 12 | 3500 | 200 |
| 14 | 4500 | 150 |
| 16 | 5000 | 100 |

*On request until 20mm.




Navy/Beige



Navy/Pistachio



Navy/White



Navy/Red



Navy/Turquoise



Navy/Grey



Navy/Yellow



Navy/Orange

Titanic

HALYARD

REF. 00603

Construction: double braided / 3 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 2:2.

Core: Polyester HT.

Cover: Spun-dyed Polyester HT with UV protection.

Features: high resistance, good quality, easy to splice and non-slip.

Recommended use: good quality halyard for cruising, for several yacht measures and multipurpose.

Working stretch: <5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 3 | 140 | 250 |
| 4 | 370 | 250 |
| 5 | 600 | 250 |
| 6 | 800 | 200 |
| 8 | 1600 | 200 |
| 10 | 2500 | 200 |
| 12 | 3500 | 200 |
| 14 | 4500 | 150 |
| 16 | 5000 | 100 |

*On request until 20mm.



White/Black



White/Yellow



White/Grey



White/Orange



White/Red



White/Green



White/Beige



White/Turquoise

Lyon

REF. 02023

HALYARD



Orange/White/Black



Grey/White/Black



Red/White/Black



Pistachio/White/Black



Lilac/White/Black



Yellow/White/Black



Turquoise/White/Black

Construction: double braided / 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 1:1.

Core: Haytex® HT.

Cover: Spun-dyed Polyester HT with UV protection.

Features: high abrasion resistance, good grip in winches and jamming cleat. Very light.

Recommended use: excellent halyard for cruising, nautical schools and multipurpose.

Working stretch: <5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 6 | 800 | 200 |
| 8 | 1600 | 200 |
| 10 | 2500 | 200 |
| 12 | 3500 | 200 |
| 14 | 4500 | 150 |
| 16 | 5000 | 100 |



Black Sea

REF. 02019

HALYARD



Black/Beige



Black/Grey



Black/Orange



Black/Pistachio



Black/ Turquoise



Black/Red



Black/Yellow



Black/White



Black/Lilac

Construction: double braided / 3 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 1:1.

Core: Polyester HT.

Cover: Spun-dyed Polyester HT with UV protection.

Features: easy to splice and long-lasting rope even when passing through the jamming cleats.

Recommended use: ideal for cruising, nautical schools, control lines and multipurpose.

Working stretch: <5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 3 | 140 | 250 |
| 4 | 380 | 250 |
| 5 | 600 | 250 |
| 6 | 800 | 200 |
| 8 | 1600 | 200 |
| 10 | 2500 | 200 |
| 12 | 3500 | 200 |
| 14 | 4500 | 150 |
| 16 | 5000 | 100 |

*On request until 20mm..



Windy

REF. 02020

HALYARD

Construction: double braided / 4 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 1:1.

Core: Polyester HT.

Cover: Spun-dyed Polyester HT with UV protection.

Features: the special torsion of its threats gives a good grip and high abrasion resistance.

Recommended use: perfect halyard for cruising, dinghy and multipurpose.

Working stretch: <5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 370 | 250 |
| 5 | 600 | 250 |
| 6 | 800 | 200 |
| 8 | 1600 | 200 |
| 10 | 2500 | 200 |
| 12 | 3228 | 200 |
| 14 | 4500 | 150 |
| 16 | 5000 | 100 |

*On request until 20mm.



Multipurpose



Lilac/Pistachio



Grey/Yellow



Turquoise/Beige



Black/Grey



Brown/Beige



Red/Yellow

Harbour

REF. 02025

HALYARD

Construction: double braided / 4 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 1:1.

Core: Polyester HT.

Cover: Spun-dyed Polyester HT with UV protection.

Features: high abrasion resistance and low water absorption.

Recommended use: excellent for competition, cruising and dinghy.

Working stretch: <5%.

| Ø MM | BREAKING STRENGTH(KG) | LENGTH (MTS) |
|------|-----------------------|--------------|
| 4 | 380 | 250 |
| 5 | 600 | 250 |
| 6 | 800 | 200 |
| 7 | 1050 | 200 |
| 8 | 1600 | 200 |
| 10 | 2345 | 200 |
| 12 | 3500 | 200 |
| 14 | 4500 | 150 |
| 16 | 5000 | 100 |


*On request until 20mm.



Beige/Brown



Grey/Black



Turquoise/Navy



Lilac/Navy




Yellow/Orange



Pistachio/Green



Red/Yellow



Navy/Grey

Dyneema®



Grey/Blue



Grey/Red



Grey/Green



Grey/White



Grey/Orange



Grey/Black



Grey/Yellow



Grey/Lilac



Grey/Pink

Lena

REF. 00170

SHEET

Construction: double braided / 4 to 14mm: 16-plaited 1:1.**Core:** Haytex® HT and Dyneema® SK-78.**Cover:** Spun-dyed PP HT pre- stretched with UV and seawater treatment.**Features:** non-absorbent, low stretch and huge thread twisting.**Recommended use:** special sheet for dinghy, cruising and regatta boats.**Working stretch:** <3%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 495 | 250 |
| 5 | 824 | 250 |
| 6 | 1180 | 200 |
| 7 | 1396 | 200 |
| 8 | 1936 | 200 |
| 10 | 2880 | 200 |
| 12 | 3450 | 200 |
| 14 | 4220 | 150 |



Bora bora

REF. 00580

SHEET

Cover: Spun-dyed Polyester HT with UV protection, special torsion.**Core:** Haytex® HT, high resistance and no water absorption (Damp-proof)**Recommended use:** Perfect as a Main sheet, Spinnaker and sailing.**Working stretch:** <5%**Ø mm:** From 4 to 16mm

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 485 | 250 |
| 5 | 829 | 250 |
| 6 | 1207 | 200 |
| 7 | 1365 | 200 |
| 8 | 1785 | 200 |
| 10 | 2867 | 200 |
| 12 | 3423 | 200 |
| 14 | 3990 | 150 |
| 16 | 5292 | 100 |



Beige



Orange



Pistachio



Turquoise



Red



Yellow



Grey



Star Cup

REF. 00605

SHEET

Construction: double braided / 4 to 12mm: 16-plaited 1:1 - 14 to 16mm: 32-plaited 2:2.

Core: Polyester HT.

Cover: Spun-dyed Polyester HT with UV protection.


Features: non-slip, abrasion resistance and easy to splice. Heat set.

Recommended use: excellent as a main sheet, spinnaker and sailing.

Working stretch: <5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 460 | 250 |
| 5 | 790 | 250 |
| 6 | 1150 | 200 |
| 7 | 1300 | 200 |
| 8 | 1700 | 200 |
| 10 | 2730 | 200 |
| 12 | 3260 | 200 |
| 14 | 3800 | 150 |
| 16 | 5040 | 100 |

*On request until 20mm.

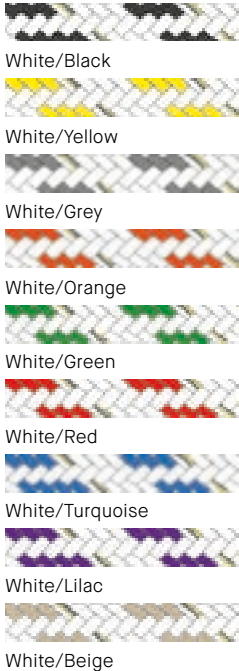

Star Cup Color

REF. 00502

SHEET

Construction: double braided / 4 to 12mm: 16-plaited 1:1 - 14 to 16mm: 32-plaited 2:2.

Core: Polyester HT.

Cover: Spun-dyed Polyester HT with UV protection.

Features: non-slip, abrasion resistance and easy to splice. Heat set.


Recommended use: perfect as a main sheet, spinnaker and sailing.

Working stretch: <5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 460 | 250 |
| 5 | 790 | 250 |
| 6 | 1150 | 200 |
| 7 | 1300 | 200 |
| 8 | 1700 | 200 |
| 10 | 2730 | 200 |
| 12 | 3260 | 200 |
| 14 | 3800 | 150 |
| 16 | 5040 | 100 |

*On request until 20mm.

*Other colours on request.

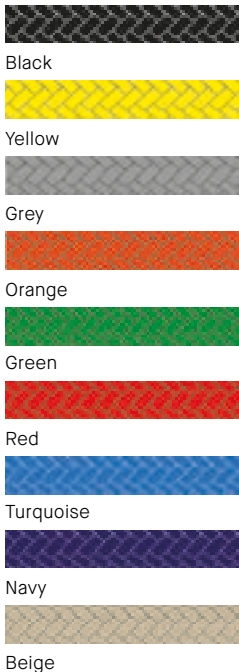

Sira

SHEET

REF. 00139



White/Yellow



White/Black



White/Beige



White/Green



White/Turquoise



White/Red

Construction: Double braided from 5 to 12mm: 16-plaited 1:1 and from 14 to 16 mm: 32-plaited 2:2

Cover: Polyester Spun Cotton touch with high resistant threats to the abrasion, spun-dyed colour with UV protection.

Core: Polyester HT special torsion.

Recommended use: Ideal rope for cruising and dinghy.

Working stretch: <5%

Ø mm: From 5 to 14mm.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 5 | 350 | 250 |
| 6 | 600 | 200 |
| 8 | 1100 | 200 |
| 10 | 1900 | 200 |
| 12 | 2500 | 200 |
| 14 | 2950 | 150 |



Regatta Color

SHEET

REF. 00135



Red



Green



Yellow



Black



Blue



Beige



White

Construction: double braided / 5 to 12mm: 16-plaited 1:1 - 14 to 22mm: 32-plaited 2:2.

Core: Polyester HT.

Cover: Polyester Spun.

Features: high quality Polyester Spun with cotton touch. Easy handling.

Recommended use: ideal rope for cruising and dinghy.

Working stretch: <5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 5 | 350 | 250 |
| 6 | 600 | 200 |
| 8 | 1100 | 200 |
| 10 | 1900 | 200 |
| 12 | 2500 | 200 |
| 14 | 2950 | 150 |

*On request until 22mm.



Top Sea

REF. 00149

SHEET

Construction: double braided / 6 to 12mm: 16-plaited 1:1 - 14mm: 32-plaited 2:2.

Core: Haytex® HT.

Cover: Polyester Spun.

Features: high quality Polyester with cotton touch.

Recommended use: excellent sheet for cruising boats and nautical school.

Working stretch: <7%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 6 | 560 | 200 |
| 8 | 1090 | 200 |
| 10 | 1675 | 200 |
| 12 | 2500 | 200 |
| 14 | 3060 | 150 |



White/Red



White/Green



White/Blue



White/Yellow



White/Black



White/Beige

Xaloc Color

REF. 00520

FLOATING

Construction: simple braided / 4 to 12mm: 16-plaited 2:2.

Composition: Polypropylene multifilament HT.

Features: floating, Spun-dyed colour with UV protection and seawater treatment.

Recommended use: perfect as a towline, water-ski rope, spi sheet and multipurpose.

Working stretch: <10%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 295 | 250 |
| 5 | 420 | 250 |
| 6 | 556 | 200 |
| 7 | 783 | 200 |
| 8 | 930 | 200 |
| 10 | 1250 | 200 |
| 12 | 1720 | 200 |



Black



Yellow



Orange



Green



Red



Turquoise



Grey



05 Dinghy

Mónaco

REF. 00158

SHEET

Core: Dyneema® SK-78, polyester HT with UV protection.

Cover: Mixed composition: Cordura®, Dyneema® SK-78 and Spun-dyed Polyester HT with UV protection.

Recommended use: excellent for dinghy, cruising and competition. Low stretch and low water absorption (damp-proof).

Working stretch: < 2%

Ø mm: From 6 to 14 mm

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 6 | 1092 | 200 |
| 7 | 1255 | 200 |
| 8 | 1392 | 200 |
| 10 | 2059 | 200 |
| 12 | 2899 | 200 |
| 14 | 3760 | 150 |

*On request until 20mm.



Black/Beige/White



Yellow/Navy/White



Grey/Navy/White



Orange/Navy/White



Pistachio/Navy/White



Red/Navy/White



Turquoise/Navy/White



Lilac/Navy/White

Dyneema®

CORDURA®

Dynacord

REF. 00127

SHEET

Construction: Simple braided, with Dyneema® SK-78, Cordura® and Spun-dyed Polyester HT, with UV protection.

Recommended use: Excellent sheet for dinghy, good grip in jamming cleats, great touch and little water absorption.

Working stretch: <3%

Ø mm: From 6 to 10 mm

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 6 | 1112 | 100/200 |
| 7 | 1700 | 100/200 |
| 8 | 2400 | 100/200 |
| 9 | 2760 | 100/200 |
| 10 | 3240 | 100/200 |



White/Green



White/Yellow



White/Turquoise



White/Orange



White/Black



White/Red



White/Pink



White/Lilac

Dynatec

REF. 04040

SHEET



Beige/Pink



Beige/Turquoise



Beige/Green



Beige/Yellow



Beige/Orange



Beige/Red



Beige/Navy

Dyneema®



technora®
The Future of America

CORDURA®

Construction: double braided / 4 to 6mm: 16-plaited 1:1 - 8 to 10mm: 32-plaited 1:1.

Core: Dyneema® SK-78, Coating, Heat Stretch System.

Cover: Technora® and Cordura®.

Features: excellent grip and abrasion with ideal touch.

Recommended use: special sheet for dinghy and high competition.

Working stretch: <1%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 890 | 100/200 |
| 5 | 1450 | 100/200 |
| 6 | 1925 | 100/200 |
| 8 | 4010 | 100/200 |
| 10 | 4650 | 100/200 |

REGATTA HSS
Heat Stretch System

REGATTA CS
Coating System

Marine Plus

REF. 04060

HALYARD/SHEET



Lilac/White



Turquoise/White



Red/White



Green/White



Grey/White



Orange/White



Navy/White



Yellow/White



Burgundy/White

Dyneema®



Construction: double braided / 2 to 7mm: 16-plaited 1:1.

Core: Dyneema® SK-78, Coating, Heat Stretch System.

Cover: Spun-dyed Polyester HT with UV protection.

Features: minimum stretch, very light and easy to handle.

Recommended use: excellent halyard/sheet for dinghy and competition.

Working stretch: <1%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 2 | 255 | 100/200 |
| 3 | 480 | 100/200 |
| 4 | 800 | 100/200 |
| 5 | 1100 | 100/200 |
| 6 | 1640 | 100/200 |
| 7 | 2320 | 100/200 |

*Other colours on request.

REGATTA HSS
Heat Stretch System

REGATTA CS
Coating System

Super Hobie F-18

REF. 00021

SHEET

Construction: double braided / 4 to 7mm: 16-plaited 1:1 - 8 to 9mm: 32-plaited 1:1.

Core: Dyneema® SK-78, Coating, Heat Stretch System.

Cover: Cordura® and white Spun-dyed Polyester HT with UV protection.

Features: excellent grip and touch. Non-slip and high resistant to friction.

Recommended use: perfect as a halyard, spi sheet and control lines.

Working stretch: <1%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 890 | 100/200 |
| 5 | 1450 | 100/200 |
| 6 | 1925 | 100/200 |
| 7 | 2800 | 100/200 |
| 8 | 4010 | 100/200 |
| 9 | 4650 | 100/200 |

*On request until 20mm.


REGATTA HSS
Heat Stretch System

REGATTA CS
Coating System

CORDURA



White/Beige



White/Pink



White/Yellow



White/Navy



White/Orange



White/Green



White/Red



White/Turquoise

Dyneema®



Dyna Speed

REF. 00017

HALYARD

Construction: simple braided / 1 to 12mm: 12-plaited.

Composition: Dyneema® SK-78, Coating, Heat Stretch System.

Features: high breaking strength, easy to splice and high floatability.

Recommended use: ideal for control ropes, trapeze regulator and multipurpose.

Working stretch: <1%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 1 | 165 | 100 |
| 1,5 | 260 | 100 |
| 2 | 480 | 100 |
| 2,5 | 530 | 100 |
| 3 | 1125 | 100 |
| 4 | 1860 | 100 |
| 5 | 2860 | 100 |
| 6 | 4180 | 100 |
| 7 | 6220 | 100 |
| 8 | 7300 | 100 |
| 10 | 10500 | 100 |
| 12 | 14300 | 100 |

*On request until 20mm.

Dyneema®



Yellow



Red



Green



Turquoise



White



Silver Grey



Black

REGATTA HSS
Heat Stretch System

REGATTA CS
Coating System

Excel Vectran

HALYARD

REF. 03010



Dark Grey



Beige

Vectran
REGATTA CS

Coating System


Construction: simple braided / 2 to 8mm: 12-plaited.

Composition: Vectran®, Coating System.

Features: minimum stretch, high breaking strength and easy to splice.

Recommended use: perfect halyard for trapeze rope and extreme applications in the deck.

Working stretch: <1%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 2 | 430 | 100 |
| 3 | 980 | 100 |
| 4 | 1795 | 100 |
| 5 | 2760 | 100 |
| 6 | 4650 | 100 |
| 8 | 6780 | 100 |

*Other diameters on request.



Omega

SHEET

REF. 00020



White/Pink



White/Turquoise



White/Yellow



White/Green



White/Orange



White/Beige



White/Red



White/Navy

CORDURA
Dyneema®
Construction: simple braided / 4 to 12mm: 16-plaited 2:2.

Composition: Dyneema® SK-78 and Cordura®. Coating System.

Features: easy handling, long life and good grip when passing through the jamming cleats.

Recommended use: perfect rope for dinghy as a spinnaker, genaker, jib and main sheet.

Working stretch: <1.5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 620 | 100/200 |
| 5 | 870 | 100/200 |
| 6 | 1235 | 100/200 |
| 7 | 1890 | 100/200 |
| 8 | 2665 | 100/200 |
| 10 | 3610 | 100/200 |
| 12 | 4650 | 100/200 |



Caribe Mix

SHEET

REF. 09030

Construction: double braided / 6mm: 16-plaited 1:1 - 8 to 10mm: 32-plaited 1:1.

Core: Dyneema® SK-78 and Polyester HT.

Cover: Cordura® and Spun-dyed Polyester HT with UV protection.

Features: very light, non-slip and high abrasion resistance.

Recommended use: excellent sheet for competition, cruising and dinghy.

Working stretch: <3%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 6 | 1320 | 200 |
| 7 | 1800 | 200 |
| 8 | 2200 | 200 |
| 10 | 3960 | 200 |


*Other diameters and lengths on request.



Navy/Orange



Navy/Yellow




Navy/Blue



Navy/Beige



Navy/Red



Navy/Green



Navy/White



Navy/Pink



Dyneema®

Evelyn

HALYARD/SHEET

REF. 01645

Construction: double braided / 4 to 7mm: 16-plaited 1:1 - 8 to 9mm: 32-plaited 1:1.

Core: Dyneema® SK-78 and Haytex® HT.

Cover: Spun-dyed Polyester HT with UV protection.

Features: low stretch, low water absorption and abrasion resistance.

Recommended use: high performance halyard/sheet for cruising and dinghy.

Working stretch: <3%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 450 | 250 |
| 5 | 660 | 250 |
| 6 | 1040 | 200 |
| 7 | 1325 | 200 |
| 8 | 1960 | 200 |
| 9 | 2320 | 200 |

*On request until 20mm.




Black/White



Black/Beige



Black/Orange



Black/Grey



Black/Yellow




Black/Red



Black/Pistachio




Black/Lilac



Black/Turquoise

Dyneema®

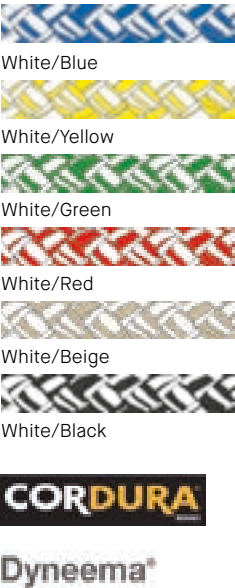

Bouvet

SHEET

REF. 00155

Construction: double braided / 6 to 14mm: 16-plaited 1:1.
Core: Dyneema® SK-78 and Haytex® HT.
Cover: 6 to 8mm: Cordura® and Haytex® HT / 10 to 14mm: Haytex® HT and high quality Polyester Spun.
Features: huge thread twisting, very good grip, low stretch and low water absorption.
Recommended use: ideal for competition boats, cruising and dinghy.
Working stretch: <3%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 6 | 1040 | 200 |
| 7 | 1195 | 200 |
| 8 | 1325 | 200 |
| 10 | 1960 | 200 |
| 12 | 2760 | 200 |
| 14 | 3580 | 150 |



Breta

SHEET

REF. 01610

Construction: double braided / 2 to 6mm: 16-plaited 1:1 - 8 to 10mm: 32-plaited 1:1.
Core: Dyneema® SK-78 and Haytex® HT.
Cover: Kevlar aramid®, Spun-dyed Polyester HT with UV protection.
Features: excellent behaviour when passing through the blocks, jamming cleats and winches. High abrasion resistance and good grip.
Recommended use: perfect halyard/sheet for dinghy and cruising.
Working stretch: <3%.

| Ø MM | CARGA DE ROTURA (KG) | LONGITUD CARRETE (MTS) |
|------|----------------------|------------------------|
| 2 | 120 | 100/200 |
| 3 | 290 | 100/200 |
| 4 | 450 | 100/200 |
| 5 | 710 | 100/200 |
| 6 | 1040 | 100/200 |
| 7 | 1325 | 100/200 |
| 8 | 1960 | 100/200 |
| 10 | 2760 | 100/200 |

*Dyneema® SK-78 core, Coating, Heat Stretch System on request.



Hobie Competition

HALYARD

REF. 00227

Construction: double braided / 4 to 7mm: 16-plaited 1:1.

Core: Dyneema® SK-78.

Cover: Dyneema® SK-78 and Spun-dyed Polyester HT with UV protection.

Features: very light and extremely resistant to abrasion.

Recommended use: excellent for windsurf and dinghy.

Working stretch: <1.5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 770 | 100/200 |
| 5 | 990 | 100/200 |
| 6 | 1505 | 100/200 |
| 7 | 2200 | 100/200 |

*Dyneema® SK-78 core, Coating, Heat Stretch System on request.



White/Turquoise



White/Red



White/Green



White/Grey



White/Orange



White/Burgundy



White/Navy

Dyneema®

Sea Red

HALYARD

REF. 00975

Construction: double braided / 1.5mm to 6mm: 16-plaited 1:1.

Core: Dyneema® SK-78.

Cover: Spun-dyed Polyester HT with UV protection.

Features: long-lasting rope and extremely resistance to abrasion.

Recommended use: perfect for windsurf and dinghy.

Working stretch: <1.5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 1.5 | 47 | 100/250 |
| 2 | 120 | 100/250 |
| 3 | 280 | 100/250 |
| 4 | 770 | 100/250 |
| 4.5 | 895 | 100/250 |
| 5 | 990 | 100/250 |
| 6 | 1505 | 100/200 |



Lilac



Turquoise



Red



Green



Yellow



Grey

Dyneema®

Sea Blue

HALYARD

REF. 00680




Black/Grey



Black/Yellow



Black/Red



Black/Turquoise



Black/Pistachio



Black/Orange



Black/White

Construction: double braided / 1 to 6mm: 16-plaited 1:1.

Core: Polyester HT.

Cover: Spun-dyed Polyester HT with UV protection.

Features: very light, easy handling and long-lasting rope.

Recommended use: specially designed for windsurf and dinghy.

Working stretch: <5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 1 | 15 | 250 |
| 1.5 | 35 | 250 |
| 2 | 65 | 250 |
| 3 | 110 | 250 |
| 4 | 370 | 250 |
| 5 | 600 | 250 |
| 6 | 800 | 200 |





06 Mooring



Polyester Rope

MOORING

REF. 00240/00241/00080

Construction: 3 strands. Double twisted / 4 to 20mm.

Core: Spun-dyed Polyester HT with UV protection.

Features: easy to splice, high breaking strength, not becomes rigid and excellent touch.

Recommended use: perfect for mooring and anchoring rope.

Working stretch: <15%.



| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 470 | 250 |
| 5 | 600 | 250 |
| 6 | 780 | 200 |
| 8 | 1450 | 200 |
| 10 | 1950 | 200 |
| 12 | 2700 | 200 |
| 14 | 3600 | 150 |
| 16 | 5000 | 100 |
| 18 | 6100 | 100 |
| 20 | 7200 | 100 |

*On request until 30mm.

Auckland

MOORING

REF. 07007

Construction: double braided / 8 to 14mm: 16-plaited 1:1 - 16 to 20mm: 32-plaited 1:1.

Core: Polyester HT.

Cover: Spun-dyed Polyester HT and UV protection.

Features: easy handling, abrasion resistance, nice touch and great elasticity.

Recommended use: ideal for mooring and multipurpose.

Working stretch: <25%.



| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 8 | 1550 | 200 |
| 10 | 2200 | 200 |
| 12 | 3300 | 200 |
| 14 | 4000 | 150 |
| 16 | 4800 | 100 |
| 18 | 6400 | 100 |
| 20 | 7100 | 100 |

*On request until 30mm.



White



Navy




Black



Silver



Beige



Red

REGATTA CS
Coating System



Brisbane

REF. 07009

MOORING

Construction: double braided / 12 to 24mm: 24-plaited 1:1.

Core: Polyester HT.

Cover: Spun-dyed Polyester HT and UV protection.

Features: special treatment against the abrasion (REGATTA CS), very flexible and long-lasting rope.

Recommended use: excellent mooring for Super Yachts between 70 to 200 feet.

Working stretch: <20%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 12 | 3600 | 200 |
| 14 | 4300 | 100 |
| 16 | 4900 | 100 |
| 18 | 5500 | 100 |
| 20 | 8600 | 100 |
| 22 | 11650 | 100 |
| 24 | 13000 | 100 |

*On request until 40mm.

*Other colours on request: beige and red.



New Port-Elastic

REF. 00780

MOORING

Construction: double braided / 12 to 22mm: 32-plaited 2:2.

Core: Polyester HT.

Cover: Spun-dyed Polyester HT with UV protection.

Features: high elasticity, easy handling and highly resistant to abrasion.

Recommended use: perfect rope for mooring and multipurpose.

Working stretch: <25%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 12 | 3800 | 200 |
| 14 | 4900 | 150 |
| 16 | 6100 | 100 |
| 18 | 8300 | 100 |
| 20 | 9800 | 100 |
| 22 | 10800 | 100 |

*On request until 44mm.



Black



Black/Grey



Black/Beige



Navy



Navy/Grey



Navy/Beige



Round Line

MOORING

REF. 00785

Construction: simple braided / 10 to 22mm.

Composition: Spun-dyed Polyester HT with UV protection.

Features: extremely flexible, high elasticity and very easy to handle.

Recommended use: ideal for mooring and multipurpose.

Working stretch: <26%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 10 | 2450 | 200 |
| 12 | 2800 | 200 |
| 14 | 3500 | 200 |
| 16 | 4320 | 100 |
| 18 | 5250 | 100 |
| 20 | 5680 | 100 |
| 22 | 6225 | 100 |

*On request until 44mm.

*Other colours on request: grey, hemp and burgundy.



Squarline

MOORING

REF. 01724/01726/01728

Construction: 8 strands / 14 to 30mm.

Composition: Spun-dyed Polyester HT with UV protection.


Features: soft and easy to handle. Abrasion resistant and non-slip.

Recommended use: perfect rope for mooring and anchoring rope.

Working stretch: <20%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 14 | 2957 | 200 |
| 16 | 3569 | 100 |
| 18 | 4180 | 100 |
| 20 | 4588 | 100 |
| 22 | 5098 | 100 |
| 24 | 5812 | 100 |
| 26 | 6628 | 100 |
| 28 | 8565 | 100 |
| 30 | 9840 | 100 |

*On request until 40mm.



Regatta Classic

MOORING

REF. 01272



Hemp

Construction: double braided / 4 to 12mm: 16-plaited 1:1 - 14 to 20mm: 32-plaited 1:1.

Core: Polyester HT.

Cover: Polyester Spun.

Features: high quality, nice touch and looks like hemp.

Recommended use: excellent for yachts, classic sailboats, decoration and multipurpose.

Working stretch: <5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 350 | 250 |
| 5 | 420 | 250 |
| 6 | 600 | 200 |
| 8 | 1050 | 200 |
| 10 | 1500 | 200 |
| 12 | 2400 | 200 |
| 14 | 2900 | 150 |
| 16 | 3600 | 100 |
| 18 | 4650 | 100 |
| 20 | 5300 | 100 |

*On request with Dyneema® SK-78 core.



Regatta 3-S

MOORING

REF. 01273



Hemp

Construction: 3 strands. Double twisted / 4 to 20mm.

Composition: high quality Polyester Spun.

Features: high quality rope, nice touch and looks like hemp.

Recommended use: ideal rope for yachts, classic sailboats, decoration and multipurpose.

Working stretch: <15%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 160 | 200 |
| 6 | 350 | 200 |
| 8 | 730 | 200 |
| 10 | 1100 | 200 |
| 12 | 1300 | 200 |
| 14 | 1700 | 150 |
| 16 | 2300 | 100 |
| 18 | 3800 | 100 |
| 20 | 4980 | 100 |

*On request until 44mm.



Top Classic

MOORING

REF. 01274

Construction: double braided / 4 to 12mm: 16-plaited 1:1 - 14 to 20mm: 32-plaited 1:1.

Core: Polyester HT.

Cover: Spun-dyed Polyester HT with UV protection.

Features: abrasion resistant, easy to splice and high quality rope.

Recommended use: perfect for yachts, classic sailboats, decoration and multipurpose.

Working stretch: <5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 420 | 250 |
| 5 | 750 | 250 |
| 6 | 900 | 200 |
| 8 | 1700 | 200 |
| 10 | 2400 | 200 |
| 12 | 3000 | 200 |
| 14 | 3800 | 150 |
| 16 | 4300 | 100 |
| 18 | 5600 | 100 |
| 20 | 6700 | 100 |

*On request until 30mm.

*On request with Dyneema® SK-78 core.



Beige

Top Classic 3-S

MOORING

REF. 01275

Construction: 3 strands. Double twisted / 6 to 20mm.

Composition: Spun-dyed Polyester HT with UV protection.

Features: abrasion resistant, easy to splice and high quality rope.

Recommended use: ideal for yachts, classic sailboats, decoration and multipurpose.

Working stretch: <15%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 6 | 580 | 200 |
| 8 | 1050 | 200 |
| 10 | 1680 | 200 |
| 12 | 2400 | 200 |
| 14 | 3370 | 150 |
| 16 | 4340 | 100 |
| 18 | 5480 | 100 |
| 20 | 6820 | 100 |

*On request until 32mm.



Beige

07 Sail Maker



Polyester Webbing

REF. 00704



Construction: webbing made with the latest generation looms. From 25 to 50mm.

Composition: Spun-dyed Polyester HT with UV protection.

Features: high resistance to seawater and very light.

Recommended use: special webbing for head, tack, genoa, lacing eye reinforcement and multipurpose.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 25 | 900 | 100 |
| 30 | 1100 | 100 |
| 40 | 1500 | 100 |
| 50 | 2200 | 100 |

*Other colours on request.



White



Navy



Black

Dyneema®

Regatta Dyneema Webbing

REF. 07058




Construction: webbing made with the latest generation looms /25 and 50mm.

Composition: Dyneema® SK-78.


Features: high performance webbing and minimum stretch.

Recommended use: ideal for sail makers and nautical uses.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 25 | 1800 | 25/50 |
| 50 | 2850 | 25/50 |



White/Grey

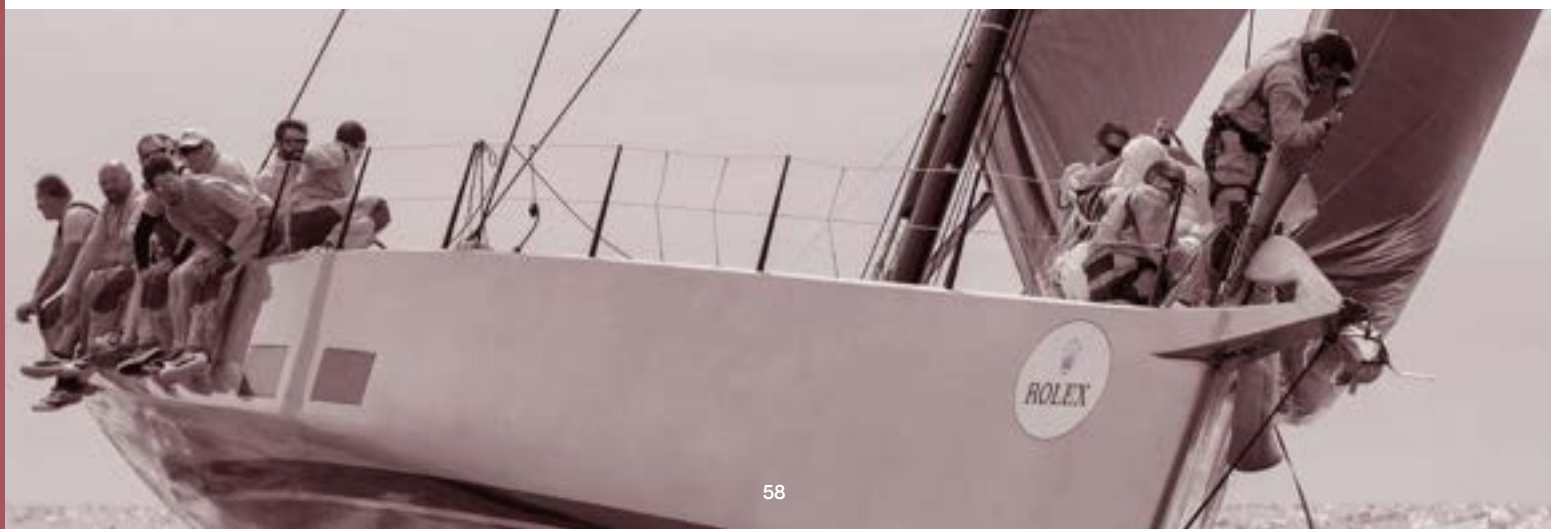

Regatta Anti-Torsion

REF. 02030



Black



Construction: triple braided / 6 to 13mm: 16-plaited 1:1.
Core: Kevlar® aramid plus additional braided Haytex® monofilament.
Cover: Spun-dyed Polyester HT with UV protection.
Features: extremely rigid and high resistance to turns.
Recommended use: perfect rope for asymmetrical furler and code 0.
Working stretch: <1%.



| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 6 | 1350 | 100 |
| 8 | 3400 | 100 |
| 11 | 4150 | 100 |
| 13 | 5080 | 100 |

*Other diameters and lengths on request.

Lazy Jack

REF. 00701



Grey

Construction: simple braided / 3 to 10mm: 16-plaited 2:2.
Composition: Spun-dyed Polyester HT with UV protection.
Features: seawater treatment and abrasion resistance.
Recommended use: ideal rope for Lazy Jack.



| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 3 | 330 | 200 |
| 4-5 | 540 | 200 |
| 6-7 | 1130 | 200 |
| 8 | 2200 | 200 |
| 10 | 3090 | 200 |

*Other colours on request.



Compact Line

REF. 00638



Construction: double braided / 4 to 8mm: 16-plaited 1:1
- 9 to 10mm: 32-plaited 1:1.

Core: Polyester HT.

Cover: Spun-dyed Polyester HT with UV protection.

Features: very round, compact and low shrinkage.

Recommended use: excellent for bolt rope, luff, leech line and multipurpose.

Working stretch: <5%.



White

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 290 | 250 |
| 4.5 | 380 | 250 |
| 5 | 500 | 250 |
| 5.5 | 570 | 250 |
| 6 | 660 | 200 |
| 7 | 850 | 200 |
| 8 | 1200 | 200 |
| 9 | 1600 | 200 |
| 10 | 1900 | 200 |

Dyneema®

Compact Line Dyneema

REF. 03090



Construction: double braided / 2 to 6mm: 16-plaited 1:1.

Core: Dyneema® SK-78.

Cover: Spun-dyed Polyester HT with UV protection.

Features: low stretch, very twisted and high resistant to abrasion.

Recommended use: perfect rope for leech line and multipurpose.

Working stretch: <1.5%.



White/Grey/Yellow

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 2 | 250 | 250 |
| 2.5 | 340 | 250 |
| 3 | 510 | 250 |
| 4 | 720 | 250 |
| 5 | 1000 | 250 |
| 6 | 1700 | 200 |

*Other diameters on request.

Compact Line Aramida

REF. 03080



White/Grey/Orange

**Construction:** double braided / 2 to 6mm: 16-plaited 1:1.**Core:** Kevlar® aramid.**Cover:** Spun-dyed Polyester HT with UV protection.**Features:** special rope with low stretch and high resistant to abrasion.**Recommended use:** excellent for leech line and multipurpose.**Working stretch:** <1.5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 2 | 210 | 250 |
| 2.5 | 280 | 250 |
| 3 | 420 | 250 |
| 4 | 640 | 250 |
| 5 | 880 | 250 |
| 6 | 1030 | 200 |

*Other diameters on request.

Kevlar Aramida

MULTIPURPOSE

REF. 00300



White/Blue/Yellow

Construction: double braided / 1.5 to 6mm: 16-plaited 1:1 - 8 to 14mm: 32-plaited 2:2.**Core:** Kevlar® aramid. From 8mm additional braided Polyester Spun.**Cover:** Spun-dyed Polyester HT with UV protection.**Features:** high resistant, low stretch and UV protection.**Recommended use:** ideal for assembly line, industry and multipurpose.**Working stretch:** <1.5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 1.5 | 115 | 250 |
| 2 | 160 | 250 |
| 3 | 235 | 250 |
| 4 | 550 | 250 |
| 5 | 800 | 250 |
| 6 | 1000 | 200 |
| 8 | 2000 | 200 |
| 10 | 2650 | 200 |
| 12 | 2783 | 200 |
| 14 | 5300 | 150 |

*Other colours on request.



UI 100
001 102

08 Multipurpose



Super Round

REF. 00360

MULTIPURPOSE

Construction: double braided / 1 to 12mm: 16-plaited 1:1.

Core: Polyester HT.

Cover: Spun-dyed Polyester HT with UV protection.

Features: flexible, doesn't get stiff and resistant to abrasion.

Recommended use: perfect rope for nautical uses, fishing, hardware and industry.

Working stretch: <5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 1 | 25 | 250 |
| 1.5 | 50 | 250 |
| 2 | 90 | 250 |
| 2.5 | 130 | 250 |
| 3 | 170 | 250 |
| 3.5 | 225 | 250 |
| 4 | 340 | 250 |
| 4.5 | 410 | 250 |
| 5 | 490 | 250 |
| 6 | 600 | 200 |
| 8 | 900 | 200 |
| 10 | 1500 | 200 |
| 12 | 2200 | 200 |



White

Polyester Braided Color

REF. 00141

MULTIPURPOSE

Construction: simple braided / 1 to 12mm: 16-plaited 2:2.

Composition: Spun-dyed Polyester HT with UV protection.

Features: high resistance to UV, very flexible and doesn't get stiff.

Recommended use: ideal for nautical uses, fishing, hardware and industry.

Working stretch: <10%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 1 | 35 | 250 |
| 1.5 | 50 | 250 |
| 2 | 90 | 250 |
| 2.5 | 130 | 250 |
| 3 | 150 | 250 |
| 4 | 280 | 250 |
| 5 | 450 | 250 |
| 6 | 640 | 200 |
| 8 | 1100 | 200 |
| 10 | 1700 | 200 |
| 12 | 2200 | 200 |



White



Yellow



Turquoise



Black



Red



Pistachio



Grey



Orange



Beige



Brown



Navy

*Other colours and lengths on request.

Fender Rope

REF. 00740



Black

Construction: Simple braided of spun-dyed Polyester HT with UV protection. Easy handling thanks their special threat torsion and easy to splice.



| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 8 | 770 | 200 |
| 10 | 1078 | 200 |
| 12 | 1485 | 200 |

*Other colours on request.

Xaloc Multipurpose

MULTIPURPOSE

REF. 00730



White/Blue

Construction: simple braided / 5 to 12mm: 16-plaited 2:2.

Composition: Spun-dyed Polyester HT with UV protection.

Features: soft texture and minimum space.

Recommended use: perfect for anchoring, fishing, fenders and multipurpose.

Working stretch: <8%.




| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 5 | 235 | 250 |
| 6 | 580 | 200 |
| 8 | 700 | 200 |
| 10 | 980 | 200 |
| 12 | 1350 | 200 |

*Other colours on request.

Liferaft Rope

REF. 00100



White

Construction: Flat tubular Polyester HT braided, produced in 32-plaited 1:1. Rope approved by Textile testing and research Laboratory of Catalonia (Spain).

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 14 | 1474 | 300 |
| 22 | 2186 | 300 |

*Other lengths on request.

Floating Haytex

REF. 992PC

FLOATING

Construction: double braided / 6 to 7mm: 16-plaited 1:1 - 8 to 18mm: 32-plaited 2:2.

Core: Haytex® HT.

Cover: Haytex® HT and UV protection.

Features: easy handling, high resistance, minimum space and 100% floatability.

Recommended use: excellent for anchoring sport fishing and multipurpose.

Working stretch: <8%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 6 | 690 | 200 |
| 7 | 932 | 200 |
| 8 | 1200 | 200 |
| 10 | 1700 | 200 |
| 12 | 2400 | 200 |
| 14 | 3600 | 150 |
| 16 | 4300 | 100 |
| 18 | 5800 | 100 |

*Special length from 200mts on request.



Orange

Ski Nautic

REF. 00150

FLOATING

Construction: simple braided / 4 to 14mm: 16-plaited 2:2.

Composition: monofilament Polyethylene with UV protection and seawater treatment.

Features: floating, easy to handle and to splice.

Recommended use: ideal as a water-ski rope, floating lines, fishing and multipurpose.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 230 | 250 |
| 5 | 340 | 250 |
| 6 | 410 | 200 |
| 7 | 600 | 200 |
| 8 | 720 | 200 |
| 10 | 1150 | 200 |
| 12 | 1550 | 200 |
| 14 | 2040 | 150 |

*Other diameters on request.



Orange/Yellow



Yellow/Orange



Orange



Yellow



White



Black

Shock-Cord

REF. 00910/00911

MULTIPURPOSE



White/Blue



White



Black

Construction: high quality latex / 3 to 10mm: 16-plaited 1:1 - 12mm: 24-plaited 1:1.

Cover: Spun-dyed Polyester HT with UV protection.

Features: round, high resistance to abrasion and UV protection.

Recommended use: perfect for topping lift, awning and multipurpose.

Standard elasticity: 100%.



REF. 00910



REF. 00911

| Ø MM | BREAKING STRENGTH (KG) | LENGTH(MTS) |
|------|------------------------|-------------|
| 3 | 40 | 100/200 |
| 4 | 105 | 100/200 |
| 5 | 120 | 100/200 |
| 6 | 194 | 100/200 |
| 7 | 230 | 100/200 |
| 8 | 280 | 100/200 |
| 10 | 350 | 100 |
| 12 | 410 | 100 |

*Special elasticity on request.

Shock-Cord Reflectante

REF. 00917

MULTIPURPOSE



Black/Grey



Navy/Grey



Red/Grey



Orange/Grey



Turquoise/Grey

Construction: high quality latex / 4 to 10mm: 16-plaited 1:1.

Cover: Spun-dyed Polyester HT with UV protection.

Features: night vision for its reflective line, round and good resistance to abrasion.

Recommended use: excellent for night use and kayaks.

Standard elasticity: 100%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 100 | 100/200 |
| 5 | 115 | 100/200 |
| 6 | 184 | 100/200 |
| 8 | 270 | 100/200 |
| 10 | 340 | 100 |

*Other colours on request.

Elastic Color

MULTIPURPOSE

REF. 00915

Construction: high quality latex / 3 to 10mm: 16-plaited 1:1.

Cover: Spun-dyed Polyester HT with UV protection.

Features: round, high abrasion resistant and UV protection.

Recommended use: perfect for topping lift, awning and multipurpose.

Standard elasticity: 3 to 6mm: 150% / 7 to 10mm: 100%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 3 | 40 | 100/200 |
| 4 | 105 | 100/200 |
| 5 | 120 | 100/200 |
| 6 | 194 | 100/200 |
| 7 | 230 | 100/200 |
| 8 | 280 | 100/200 |
| 10 | 350 | 100 |

*200% elasticity up to 5mm on request.

*Other colours on request.



Pistachio/Orange



Turquoise/Orange



Fuchsia/Lilac



Lemon/Turquoise



Orange/Lemon



Navy/Grey



Lemon



Turquoise



Red



Grey

Sandow Color PP

MULTIPURPOSE

REF. 00920

Construction: high quality latex / 3 to 10mm: 16-plaited 1:1.

Cover: Polypropylene HT with UV protection.

Features: round, high resistant to abrasion and UV protection.

Recommended use: ideal for covers, hammock, awning and multipurpose.

Standard elasticity: 100%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 3 | 35 | 100/200 |
| 4 | 65 | 100/200 |
| 5 | 100 | 100/200 |
| 6 | 140 | 100/200 |
| 7 | 187 | 100/200 |
| 8 | 200 | 100/200 |
| 10 | 240 | 100 |



Blue



Green



Lilac



Fuchsia



Yellow

Lead Rope

MULTIPURPOSE

REF. 007-N



Black

Construction: double braided.

Cover: Polyester HT, spun-dyed black colour with UV protection and special torsion.

Core: Braided rosary lead with Elastane thread type Lycra® for safety and lead protection.

Recommended use: multipurpose for nautical use, ports, fishing, and other applications.

Ø mm: from 6 to 12

| Ø MM | LENGTH (MTS) | WEIGHT/MT |
|------|--------------|-----------|
| 6 | 200 | 42g |
| 8 | 100 | 84g |
| 10 | 100 | 126g |
| 12 | 100 | 168g |

*Other colours on request.



Textile Shackle

MULTIPURPOSE

REF. 01660



Dyneema®

Composition: Dyneema® SK-78.

Diameters: 4 to 14mm.

Features: easy assembly, long lasting and fastener guaranteed under load.

10 times lighter than steel.

Recommended use: excellent for nautical uses and industry.

| Ø MM | BREAKING STRENGTH (TN) | MAXIMUM WORKING LOAD (TN) |
|------|------------------------|---------------------------|
| 4 | 1 | 0.5 |
| 5 | 1.5 | 0.75 |
| 6 | 2 | 1 |
| 8 | 4 | 2 |
| 9 | 5 | 2.5 |
| 10 | 6 | 3 |
| 12 | 8 | 4 |
| 14 | 10 | 5 |



REGATTA HSS
Heat Stretch System

REGATTA CS
Coating System

9 Rigging Service





REF. 20012



REF. 20013



REF. 20014



REF. 20012

REF. 20012



REF. 20017



REF. 20015



REF. 20016





REF. 20021



REF. 20011



REF. 20018




REF. 20020



REF. 20019



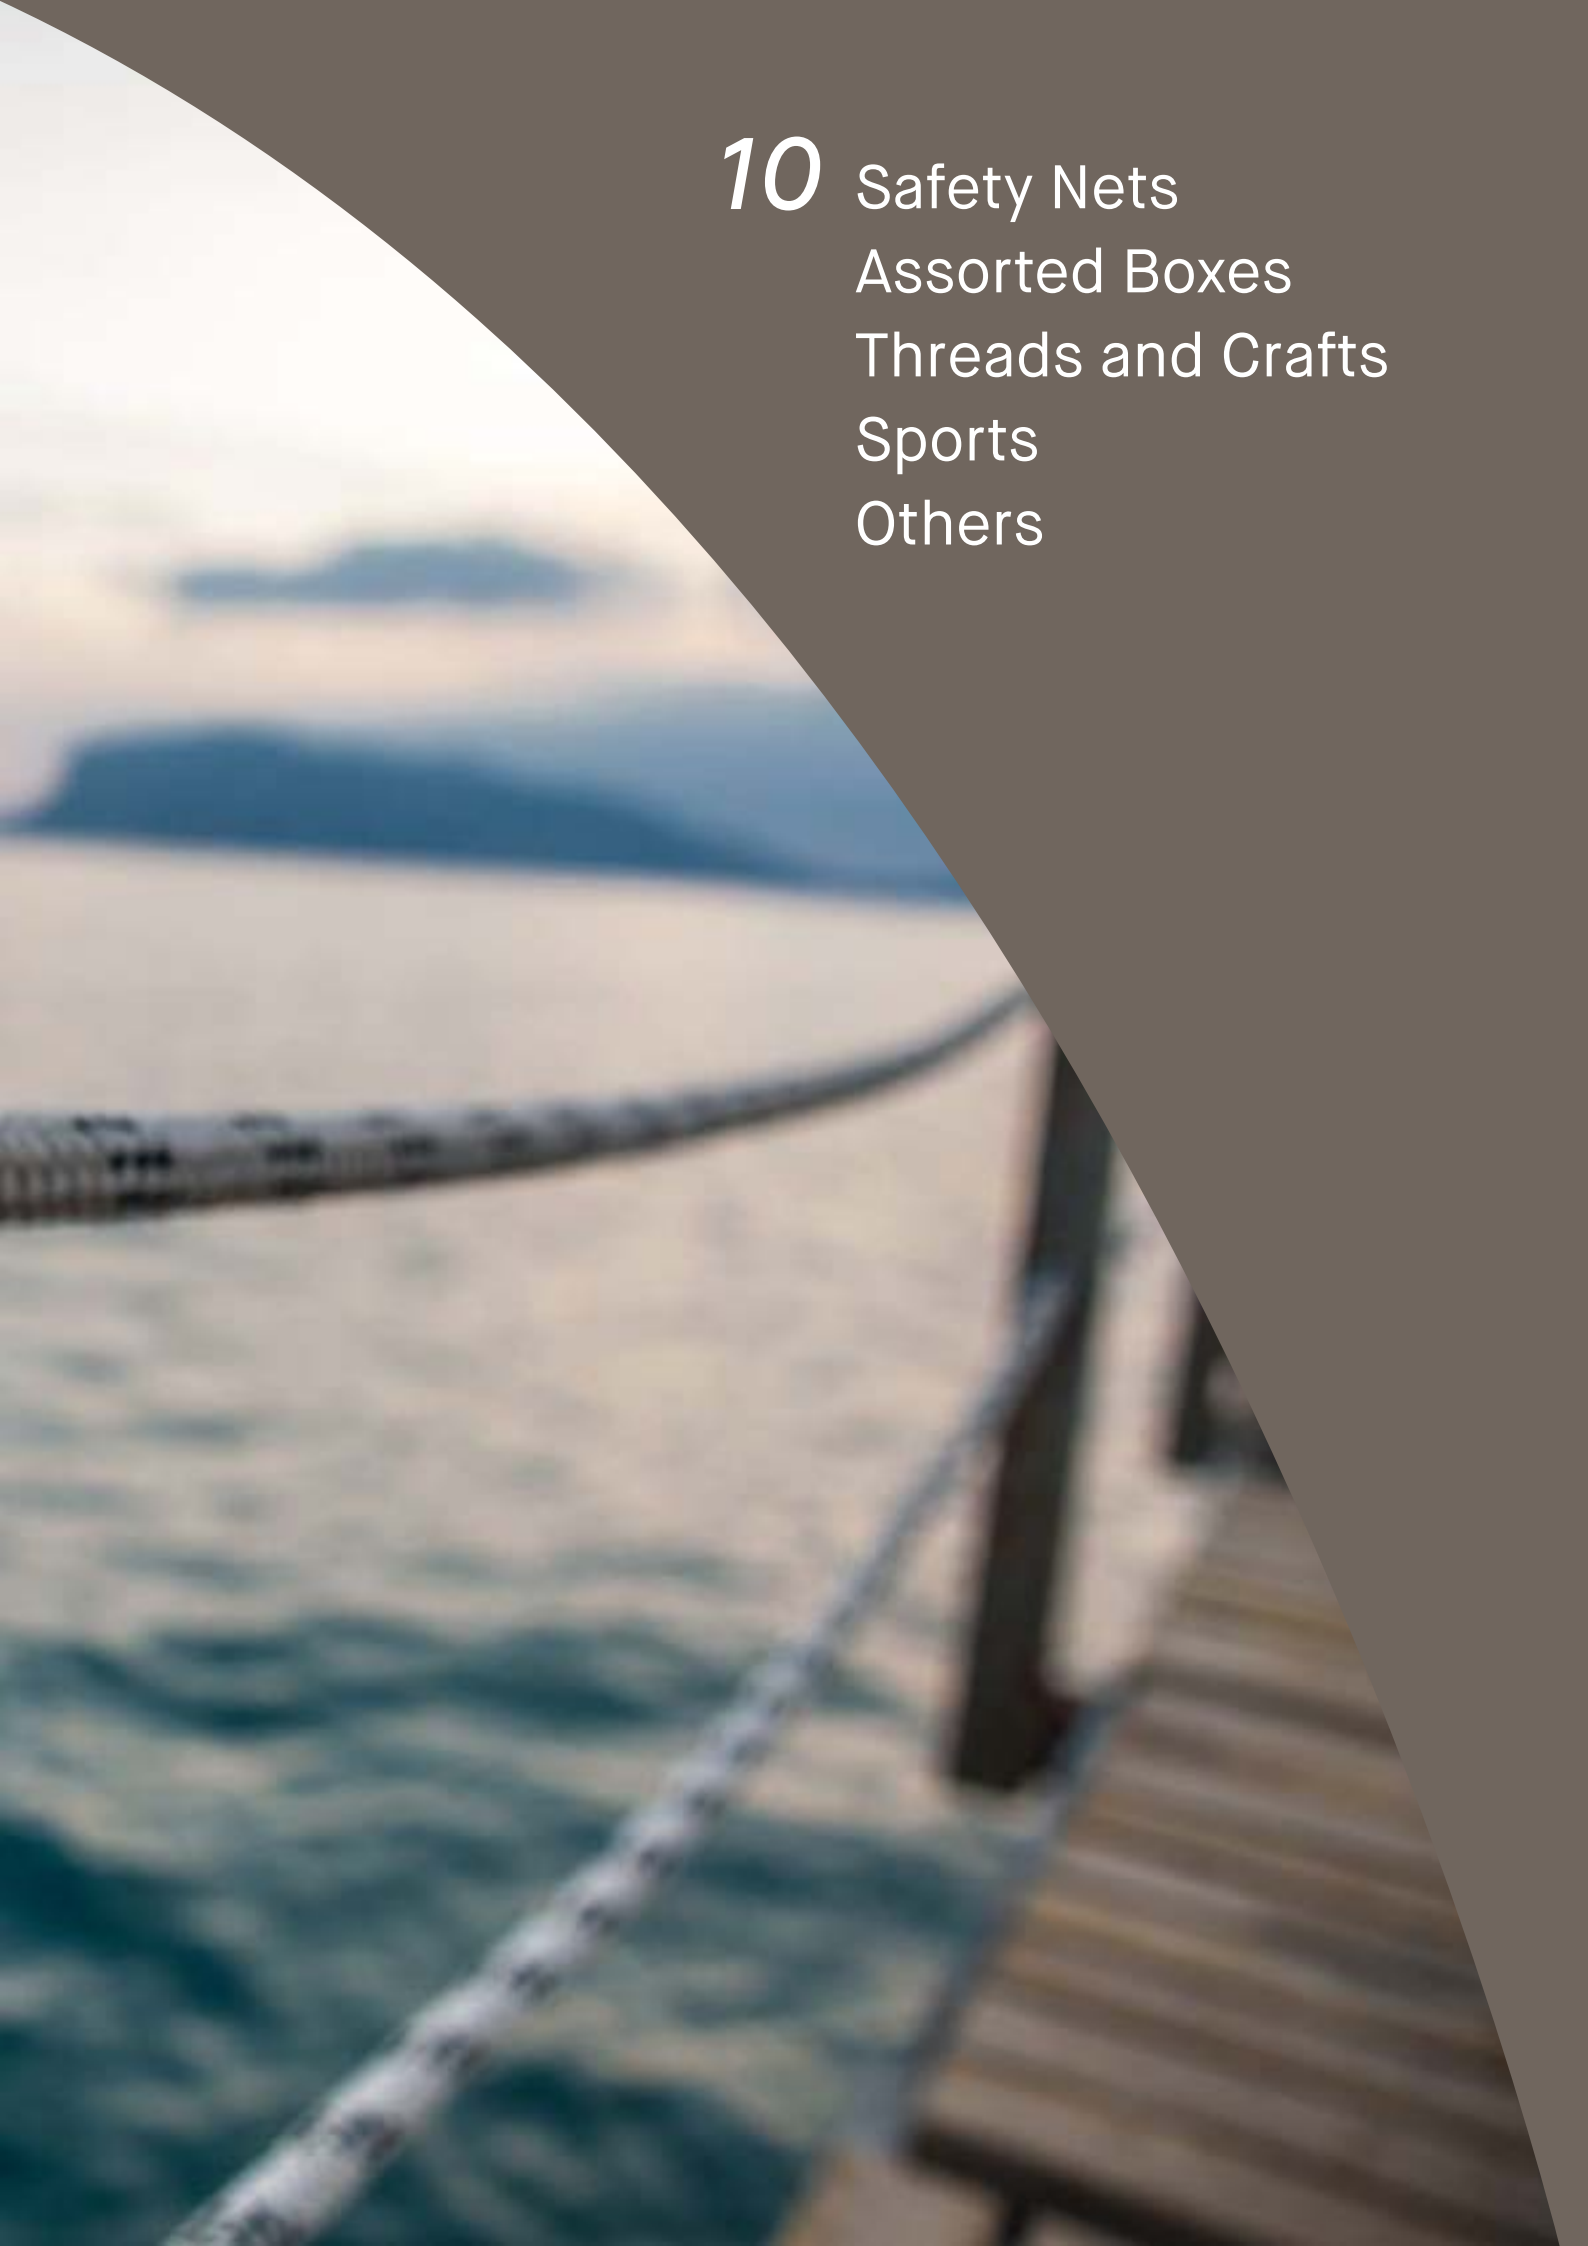

10

Safety Nets
Assorted Boxes
Threads and Crafts
Sports
Others



Stanchion Net

REF. 00999

Nylon® HT Polyamide net made with braided thread of 3mm.
Excellent fixation of the knot.

Net: 50mm - Height: 60cm - Length: 50mts

Available colours: white and black.

Breaking strength: 1600kg/m².

*Other diameters and lengths on request.



Catamaran Net

REF. 01080

Nylon® HT Polyamide net made with braided thread of 4mm.
Excellent fixation of the knot.

Net: 30mm.

Available colours: White and black.

*Production for any kind of catamaran.



Net Topped

REF. 60003

Nylon HT polyamide net constructed with 3mm braided wire.
Excellent fixation to the knot.

Mesh: 50 mm – height: 60 cm – length: 50mts

Available colours: black and white.

Breaking strength: 1100 kg/m²



Bird Net

REF. 60002

1 mm polyethylene net, special pigeons.

Mesh: 60mm (available mesh 50mm)

Available colours: crystal

Breaking strength: 150 kg/m²

Assorted Boxes



Dyneema Fishing

Dyneema®

REF. 992FC

Dyneema® SK-78 rope for optimist, dinghy and multipurpose.
High resistance and low stretch.
Wide range of colours available.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 1.5 | 80 | 10 X 50 |
| 2 | 195 | 10 X 20 |
| 3 | 365 | 10 X 10 |



Dyneema Color

Dyneema®

REF. 97500

Dyneema® SK-78 rope for optimist, dinghy and multipurpose.
High resistance and low stretch.
Wide range of colours available.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 1.5 | 47 | 10 X 50 |
| 2 | 120 | 10 X 20 |
| 3 | 280 | 10 X 10 |



Bensity Competition

Dyneema®

REF. 99200

Dyneema® SK-78 rope for optimist, dinghy and multipurpose.
High resistance and low stretch.
Wide range of colours available.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 1.5 | 120 | 10 X 50 |
| 2 | 200 | 10 X 20 |
| 3 | 280 | 10 X 10 |



Classic Line

REF. 12760

Polypropylene rope for crafts and DIY.

Long life and UV protection.

Available colour: natural hemp.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 3 | - | 6 x 10 |



Dyna Speed SK-78

Dyneema®

REF. 17000

Dyneema® SK-78 rope for dinghy, technical use and multipurpose.

High resistant to abrasion and UV protection.

Available colours: red, grey, blue, yellow, silver and neon green.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 2 | 480 | 6 X 30 |
| 3 | 1125 | 6 X 15 |
| 4 | 1860 | 6 X 10 |



Vectran Virginia

Vectran®

REF. 19600

Vectran® rope for dinghy and multipurpose.

High performance rope, low stretch and long life.

Available: mottled colours.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 1.5 | 150 | 10 X 50 |
| 2 | 200 | 10 X 20 |
| 3 | 380 | 10 X 10 |

Assorted Boxes

Polyester HT rope for dinghy, multipurpose and crafts.
Wide range of colours available.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 2 | 85 | 18 x 25 |
| 3 | 145 | 12 x 25 |

*Other diameters on request.



Fluor
REF. 50003



Arena
REF. 51100



Ola
REF. 51400



Fluor Solid Colors
REF. 51800



Summer
REF. 52200



Marbella
REF. 07019P



Coral
REF. 02230



Yuca
REF. 02029P

Crafts

Polyester TEX rope with soft touch for crafts.
Wide range of colours available.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 2 | - | 18 x 25 |
| 3 | - | 12 X 25 |



Diente de León

REF. 500T-DL



Solid Colors

REF. 500T-CL



Arcoiris

REF. 500T-AI



Combi

REF. 500T-196

Threads



Threads

| REF. | Ø MM | N° OF SPOOLS | CONSTRUCTION | TREATMENT | COLOUR |
|-------|------|--------------|--------------|-----------------|--------------|
| 11001 | 1.0 | 5 X 30 | Plaited | Unwaxed | White |
| - | 1.5 | 5 X 20 | Plaited | Unwaxed | White |
| - | 1.5 | 5 X 20 | Plaited | Intensely waxed | White |
| - | 1.2 | 5 X 30 | Twisted | Intensely waxed | White |
| 11006 | 0.5 | 20 x 30 | Twisted | Intensely waxed | White |
| 11007 | 1.2 | 20 x 30 | Plaited | Intensely waxed | White |
| 11008 | 1.5 | 20 x 20 | Plaited | Intensely waxed | White |
| 11011 | 1.0 | 20 x 30 | Plaited | Intensely waxed | White |
| 11012 | 1.5 | 20 x 20 | Plaited | Unwaxed | Multicolour* |
| 11013 | 1.5 | 20 x 20 | Plaited | Intensely waxed | Multicolour* |
| 11018 | 1.5 | 20 x 20 | Plaited | Unwaxed | Black |
| 11019 | 1.5 | 20 x 20 | Plaited | Intensely waxed | Black |

*Multicolour: black, navy, green, red and yellow.

Whipping twine for nautical uses, industry and multipurpose.
Intensely waxed and unwaxed.

Technical Threads for Nautical uses, Industry and Multipurpose

REF. 11014 waxed / REF. 11015 unwaxed



High quality braided thread in Polyester HT.

Diameter: 1mm.

Bobbins: 250 and 500mts.

Colours: white, natural hemp, navy and black.

*Other colours on request.

Finishing Ropes

REF. 06016

Simple braided Polyester HT rope.

Diameters: 1.5 and 2mm.

Bobbins: 100mts.

Available colours: navy, beige, white, burgundy, grey, black, red and green bottle.



Dyneema Compact Line

REF. 78017

Composition: Dyneema® SK-78, Regatta Heat Stretch and Coating System.

Features: excellent resistance after supporting high loads.

Available colours: blue, yellow, white, green, red and grey.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 1.00 | 165 | 300 |
| 1.30 | 210 | 300 |
| 1.50 | 260 | 300 |
| 1.70 | 310 | 300 |
| 1.90 | 390 | 300 |

Dyneema®

REGATTA HSS
Heat Stretch System

REGATTA CS
Coating System

Dynaplus SK-99

REF. 99017

Features: more tenacity and lower elongation than SK-78

Composition: Dyneema® SK-99, Regatta Heat Stretch and Coating System

Available colours: white, black and silver grey.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 1.00 | 196 | 200 |
| 1.25 | 310 | 200 |
| 1.50 | 445 | 200 |

Dyneema®

Regatta Kite Protect

REF. RKP/100/200

Composition: Polyester TEX.

Features: anti-slip treatment and UV protection.

Available colours: yellow, blue, green, red and black.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 2,7 | 50 | 100/200 |

Super Speed

REF. 00019

Composition: Dyneema® SK-78 simple braided and pre-stretched.

Features: very technical rope and long lasting.

Available colour: white.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 3.8 | 670 | 100/200 |
| 4.5 | 726 | 100/200 |
| 5 | 1430 | 100/200 |

Dyneema®

Kevlar Serial Line

REF. KSL



Composition: braided Kevlar® and Spun-dyed Polyester HT with UV protection.

Features: optimal readjustment results and minimum stretch.

Available colours: grey fleck + colour: turquoise, fuchsia, orange, green, red, purple, neon yellow, green and black.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 1.25 | 120 | 200 |
| 1.40 | 160 | 200 |
| 1.90 | 200 | 200 |
| 2.15 | 250 | 200 |
| 2.25 | 350 | 200 |

*Other diameters and lengths on request.



Compact Plus SK-78

REF. 00023



Composition: Dyneema® SK-78, Regatta Heat Stretch, Coating System.

Features: compact and great touch.

Available colour: silver.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 4 | 1506 | 100 |
| 5 | 2212 | 100 |
| 6 | 2957 | 100 |



REGATTA HSS
Heat Stretch System

REGATTA CS
Coating System



Balloons



REF. 01543-G

REF. 00300-G

REF. 00910-G

REF. 00308-G

REF. 00930-G

REF. 00208-G

REF. 00603-G

REF. 00690-G

Regatta Yacht Ropes has developed the latest technological range of ropes for balloons.

These ropes are used by Ultramagic: company leader in research, development and construction of professional balloons.

In all these lines, the latest technologies developed by REGATTA YACHT ROPES - Star Mar, SA are using special fibers with minimum stretch and high resistance to fire such as Kevlar®, Technora®, Polyester, special yarns, among others.

Aramid has been specially treated with our special Regatta Coating System that allows long life and support extreme temperatures between -30°C and 350°C.

| REF. | Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) | COLOUR |
|----------|------|------------------------|--------------|---|
| 00300-G* | 2.5 | 180 | 250 | White, White/blue, White/grey |
| 01543-G* | 3 | 250 | 250 | Yellow |
| 00910-G | 3 | 40 | 100 | White/Grey/Yellow |
| 00308-G* | 4 | 550 | 250 | Red, Blue, Green, Grey and Black |
| - | 5 | 800 | 250 | Red, Blue, Green, Grey and Black |
| 00603-G | 5 | 600 | 250 | White/Grey/Yellow |
| - | 8 | 1600 | 200 | White/Grey/Yellow |
| - | 14 | 4500 | 150 | White/Grey/Yellow |
| 00930-G | 8 | 1600 | 200 | Black, Black/Grey |
| 00208-G* | 8 | 2400 | 200 | White, Red, White/Red |
| 00690-G | 20 | 4200 | 100 | White, Green, Red, Blue, Yellow and Black |

*Other diameters, colours and lengths on request.

*Kevlar® core.

Ibiza Beach

HALYARD

REF. 12100

Dyneema®

Construction: double braided / 10.5 and 12.2mm: 32-plaited 1:1.
Core: Dyneema® SK-78 and Haytex® HT plus additional braided Polyester Spun.
Cover: Spun-dyed Polyester HT with UV protection.
Working stretch: <3%.



| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 10.5 | 3860 | 200/300 |
| 12.2 | 4900 | 200/300 |

*Other lengths and colours on request.

Super Ibiza Beach

HALYARD

REF. 12200

Dyneema®

Construction: double braided / 10.5 and 12.2mm: 32-plaited 1:1.
Core: Dyneema® SK-78 plus additional braided Polyester Spun.
Cover: Spun-dyed Polyester HT with UV protection.
Working stretch: <1.5%.



| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 8.9 | 3024 | 200/300 |
| 10.5 | 5000 | 200/300 |
| 12.2 | 6200 | 200/300 |

*Other colours and lengths on request



Slings

REF. 01673

We offer to our customers a personalized sling service for nautical and industrial use.

*Length, diameter and breaking strength on request.

*Optional: with or without eye.

*Optional: eye with reinforcement end.

Car Strap 4x4

REF. 01671

Composition: Spun-dyed Polyester HT with UV protection.

Features: traction sling with hook.

Recommended use: perfect webbing created for towing.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 50 | 2500 ↔ | 5 |

*Other lengths on request.

Car 4x4

REF. 01672

Composition: Spun-dyed Polyester HT with UV protection.

Features: flat sling with eye.

Recommended use: excellent webbing created for towing.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 50 | 5000 ↔ | 5 |

*Other lengths on request.

Decoration

Rainbow

REF. 06025

Construction: double braided/ 6 to 7 mm: 16 plaited 1:1 -8 to 18 mm: 32 plaited 2:2

Composition: polypropylene HT

Cover: polypropylene HT

Features: easy handling, no water absorption, UV protection and maximum resistance.

Recommended use: decoration, outside furniture.



Agrorope

Olive Wire

REF. CO.Ø.CR

Construction: double braided.

Cover: polyethylene fiber.

Features: following the regulations and declared suitable to be used in the agrorope.

Recommended use: to be used in agriculture measuring machines as olives, cherries, tomatoes, fruits and vegetables in general.

Available diameters: 6 , 6,5 , 7 , 7,5 , 8 , 9 , 10mm.

*On request until 27mm.



Tivoli

REF. 03007

MULTIPURPOSE



Black

Construction: double braided / 5 to 14mm: 16-plaited 1:1
- 16mm:32-plaited 1:1.

Core: Polyester HT.

Cover: Polyester Spun.

Features: excellent grip, nice touch and ideal fixation on the knots.

Working stretch: <5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 5 | 350 | 250 |
| 6 | 600 | 200 |
| 8 | 1100 | 200 |
| 10 | 1900 | 200 |
| 12 | 2460 | 200 |
| 14 | 2970 | 150 |
| 16 | 3600 | 100 |

*Other colours on request.

Liceo

REF. 03008

MULTIPURPOSE



Black

Construction: double braided / 2 to 14mm: 16-plaited 1:1
- 16mm: 32-plaited 1:1.

Core: Polyester HT.

Cover: Spun-dyed Polyester HT with UV protection.

Features: high elasticity, easy to handle and high abrasion resistance.

Working stretch: <5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 2 | 90 | 250 |
| 3 | 160 | 250 |
| 4 | 370 | 250 |
| 5 | 600 | 250 |
| 6 | 800 | 200 |
| 8 | 1480 | 200 |
| 10 | 2500 | 200 |
| 12 | 3260 | 200 |
| 14 | 3800 | 150 |
| 16 | 4850 | 100 |

*Other colours on request.

Horse Riding



Horse

REF. 05010

MULTIPURPOSE

Construction: double braided / 12mm 32-plaited 2:2

Core: Haytex®HT

Cover: Haytex®HT and UV protection

Features: soft touch, no water absorption, slight elasticity and lightweight.

Recommended use: soft rope perfect for horse headbands and bridging.

Available diameters: 12mm.

Height Work



TÍBET 10,5mm

CE EN 1891



TÍBET 10,5mm

CE EN 1891



HIMALAYA 11mm

CE EN 1891



HIMALAYA 11mm

CE EN 1891

Semi-Static Rope

REF. 02217 / REF. 02220

REGATTA YACHT ROPES - Star Mar, SA offers semi-static ropes for professional people for height works developed with the most advanced technology following the CE EN 1891 rule.

| REF. | REF. 02217 - TIBET |
|-----------------------|----------------------------|
| DIAMETER | 10.5mm |
| TYPE | A |
| BREAKING STRENGTH | 2700 daN (kg) |
| RESISTANCE EIGHT KNOT | 1950 daN (kg) |
| WEIGHT PER METER | 65g |
| % OF THE COVER | 38% |
| AVAILABLE COLOURS | White/Orange/Black, Orange |

| REF. | REF. 02220 - HIMALAYA |
|-----------------------|-------------------------------|
| DIAMETER | 11mm |
| TYPE | A |
| BREAKING STRENGTH | 3000 daN (kg) |
| RESISTANCE EIGHT KNOT | 2100 daN (kg) |
| PESO POR METRO | 73g |
| % OF THE COVER | 36% |
| AVAILABLE COLOURS | White/Black/Grey/Yellow, Navy |

Classic Line 3-S

MULTIPURPOSE

REF. 01277

Construction: 3 strands / 6 to 34mm.**Composition:** Polypropylene natural hemp.**Features:** very light and easy to handle.**Recommended use:** special rope for decoration and multipurpose.**Working stretch:** <15%.

Hemp

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 6 | 505 | 220 |
| 8 | 912 | 220 |
| 10 | 1337 | 220 |
| 12 | 1927 | 220 |
| 14 | 2500 | 220 |
| 16 | 2938 | 220 |
| 18 | 3510 | 220 |
| 20 | 3943 | 220 |
| 22 | 4728 | 220 |
| 24 | 5529 | 220 |
| 26 | 6400 | 220 |
| 28 | 7300 | 220 |
| 30 | 8300 | 220 |
| 32 | 9200 | 220 |
| 34 | 10300 | 220 |

*On request until 40mm.

Arboriculture

Tree

MULTIPURPOSE

REF. 01640

Construction: double braided / 12 to 14mm: 16-plaited 1:1 - 16 to 18mm: 32-plaited 1:1.**Core:** Polyester HT.**Cover:** Spun-dyed Polyester HT with UV protection.**Features:** high abrasion resistance, easy to splice and nice touch.**Recommended use:** for pruning, felling and forest use in general.**Working stretch:** <5%.

| Ø MM | BREAKING STRENGTH (KG) | LENGTH (MTS) |
|------|------------------------|--------------|
| 12 | 3260 | 200 |
| 14 | 3800 | 150 |
| 16 | 5040 | 100 |
| 18 | 6600 | 100 |

*Other colours on request.



Black



Red



Green



Burgundy

■ Buckle-25PL




REF. 02905



Composition: Polypropylene HT and UV protection.

Features: endless buckle. High abrasion resistance.

Recommended use: for small loads and DIY.

| Ø MM | BREAKING STRENGTH (KG) | PACKAGING  |
|------|--|---|
| 25 | 30  | 2 pieces of 2mts |
| 25 | 30  | 1 piece of 5mts |

■ Buckle-35PL




REF. 02908



Composition: Polypropylene HT and UV protection.

Features: endless buckle. High abrasion resistance.

Recommended use: for small loads and DIY.

| Ø MM | BREAKING STRENGTH (KG) | PACKAGING  |
|------|--|---|
| 35 | 40  | 1 piece of 3mts |
| 35 | 40  | 1 piece of 5mts |

■ Lashing-25





REF. 02910 - REF. 02915



Composition: Polyester HT and UV protection.

Features: endless lashing or with closed hook. High abrasion resistance.

Recommended use: for small loads and DIY.

| REF. | Ø MM | BREAKING STRENGTH (KG) | PACKAGING  |
|-------|------|---|---|
| 02910 | 25 | 800  | 1 piece of 5mts |
| 02915 | 25 | 800  400  | 1 piece of 5mts |

■ Lashing-35





REF. 02930 - REF. 02935



Composition: Polyester HT and UV protection.

Features: endless lashing or with closed hook. High abrasion resistance.


Recommended use: for small loads and DIY.

| REF. | Ø MM | BREAKING STRENGTH (KG) | PACKAGING  |
|-------|------|---|---|
| 02930 | 35 | 2000  | 1 pieza de 6mts |
| 02935 | 35 | 2000  1000  | 1 pieza de 6mts |

■ Lashing - 50

REF. 02940


**Composition:** Polyester HT and UV protection.**Features:** lashing with closed hook. High abrasion resistance.**Recommended use:** for high loads and professional use.

| Ø MM | BREAKING STRENGTH (KG) | PACKAGING  |
|------|------------------------|---|
| 50 | 4000 ↗ 2000 ↔ | 1 piece of 9mts |

□ ■ Buckle - 25 Inox

REF. 02800


**Composition:** Polyester HT and UV protection.**Features:** endless buckle and high abrasion and corrosion resistance.**Recommended use:** for small loads and DIY.

| REF. | Ø MM | BREAKING STRENGTH (KG) | PACKAGING  |
|------------|------|------------------------|---|
| 02800/25-3 | 25 | 250 ⤴ | 1 pieza de 3mts |
| 02800/25-5 | 25 | 250 ⤴ | 1 pieza de 5mts |

□ ■ ■ Lashing-25 Inox

REF. 02920 - REF. 02925

**Composition:** Polyester HT and UV protection.**Features:** endless lashing or with closed hook. The stainless steel of both pieces (turnbuckle and closed hook) gives a high abrasion and corrosion resistance.**Recommended use:** for small loads and DIY.

| REF. | Ø MM | CARGA DE ROTURA (KG) | PRESENTACIÓN  |
|-------|------|----------------------|--|
| 02920 | 25 | 800 ⤴ | 1 piece of 5mts |
| 02925 | 25 | 800 ↗ 400 ↔ | 1 piece of 5mts |






Lashing - 35 Inox

REF. 02960 - REF. 02965

Composition: Polyester HT and UV protection.

Features: stainless and endless lashing or with closed hook. High abrasion and corrosion resistance.

Recommended use: for small loads and DIY.

| REF. | Ø MM | BREAKING STRENGTH (KG) | PACKAGING  |
|-------|------|--|---|
| 02960 | 35 | 2000  | 1 piece of 6mts |
| 02965 | 35 | 2000  | 1 piece of 6mts |






Lashing With Closed Hook - 50 Inox

REF.02970

Composition: Polyester HT and UV protection.

Features: stainless lashing with closed hook. High abrasion and corrosion resistance.

Recommended use: for small loads and DIY.

| Ø MM | BREAKING STRENGTH (KG) | PACKAGING  |
|------|--|---|
| 50 | 4000  2000  | 1 piece of 10mts |



Regatta Webbing Box

REF.52500




Endless lashing webbing with buckle.

Composition: Polyester HT and UV protection.

Available colours: orange, turquoise and black.

*Optional: Regatta Webbing Box with the same length.

| Ø MM | BREAKING STRENGTH (KG) | WEBBING LENGTH (MTS) |
|------|------------------------|----------------------|
| 25 | 250 | 8 units x 2mts |
| 25 | 250 | 8 units x 3mts |
| 25 | 250 | 8 units x 4mts |

| REF. | Ø MM | BREAKING STRENGTH (KG) | WEBBING LENGTH (MTS) |
|---|------|------------------------|----------------------|
|  52500/2 | 25 | 250 | 24 units x 2mts |
|  52500/3 | 25 | 250 | 24 units x 3mts |
|  52500/4 | 25 | 250 | 24 units x 4mts |



Regatta Needle Splicing Set

REF. 02007-4000

4 tools to splice made of steel.

Between 4 and 14mm.

To be used in twisted and braided ropes.

Packaging: in a practical plastic tube.



Regatta Bodkin

REF. 02007-3000

Tool to splice 3 and 8 strands ropes.

Up to 12mm.

REF. 02007-2000

Tool to splice 3 and 8 strands ropes.

Up to 14mm.



Regatta Rope Cutter

REF. 01591

Tool for sealing and cutting ropes and synthetic cords by heat.

Professional cut for all sizes of synthetic ropes.

Cutting width: 21mm.




Regatta Meter Counter

REF. 00592

High quality tool with a firm construction.

Can be calibrated for ropes and lines between 3 and 20mm of diameter.

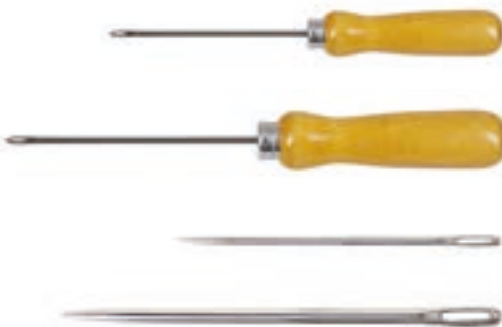

Regatta Special Sewing Needles

Special tools tested to splice. It can be used without gloves and saves time and effort when sewing ropes.

Ref. 02007-1301: wooden handle. Special needles for mini loops.

Ref. 02007-1304: wooden handle. Special needles for mini loops.

Ref. 02007-1303: Diameter: 1.78mm / Long: 76mm

Ref. 02007-1305: Diameter: 3mm / Long: 175mm.

Ref. 02007-1306: Diameter: 13 to 19mm. Set of 5 needles for hand sewing.

Display Racks



Wall Display

REF. 00135-1000

Wall exhibitor with a very stable construction.

Measures:

- High: 200cm. Optional: extensible up to 280cm
- 5 bars of 95cm
- Width: 100cm
- Depth: 25cm



Double Display


REF. 00070

Attractive display that allows to present the maximum quantity of ropes in a minimum space.

No installation required in any supporting point.

Measures:

- High: 200cm. Optional: extensible up to 280cm
- 10 bars of 95cm
- Width: 100cm
- Depth: 55cm

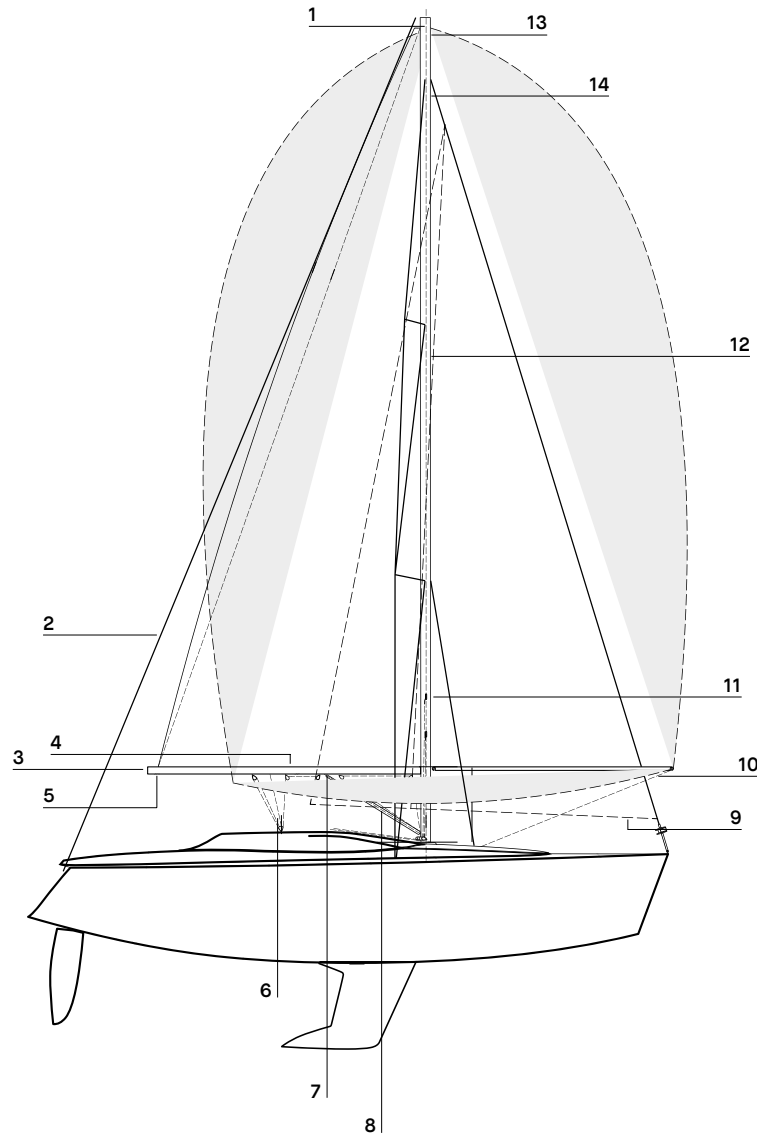

1. Main Halyard

- Ocean Race 11
- Platinum-90 12
- Oceanic Vectran 13
- Marina-Pro 17
- Atlanta 24

2. Backstay

- Atlanta 24
- Vectran Virginia 25
- Excel Vectran 45
- Dyna Speed 44

3. Boom Topping Lift

- Racing 25
- Bensy Competition 26

4. Spinnaker Sheet

- Platinum-90 12
- Marina-Pro 17
- Racing 25
- Dynatec 43
- Super Hobie F-18 44

5. Outhaul

- Atlanta 24
- Vectran Virginia 25
- Marine Plus 43
- Dyna Speed 44

6. Main Sheet

- Marina-Pro 17
- Racing 25
- Dynatec 43
- Super Hobie F-18 44

7. Genoa Sheet

- Platinum-90 12
- Marina-Pro 17
- Bensy Competition 26
- Dynatec 43
- Super Hobie F-18 44

8. Kicking Strap

- Marina-Pro 17
- Racing 25
- Marine Plus 43
- Dyna Speed 44

9. Pole Down

- Oceanic Vectran 13
- Marina-Pro 17
- Racing 25

10. Spinnaker Guy

- Racing 25
- Bensy Competition 26
- Vectran Virginia 25

11. Cunningham

- Racing 25
- Atlanta 24
- Dyna Speed 44

12. Pole Up

- Regatta Reflective 16
- Marina-Pro 17
- Racing 25
- Atlanta 24


13. Spinnaker Halyard

- Marina-Pro 17
- Burton-SK90 18
- Racing 25
- Bensy Competition 26

14. Genoa Halyard

- Platinum-90 12
- Oceanic Vectran 13
- Marina-Pro 17
- Burton-SK90 18
- Atlanta 24

*Within the line of recommended ropes there is a wide range of our products for the same use.

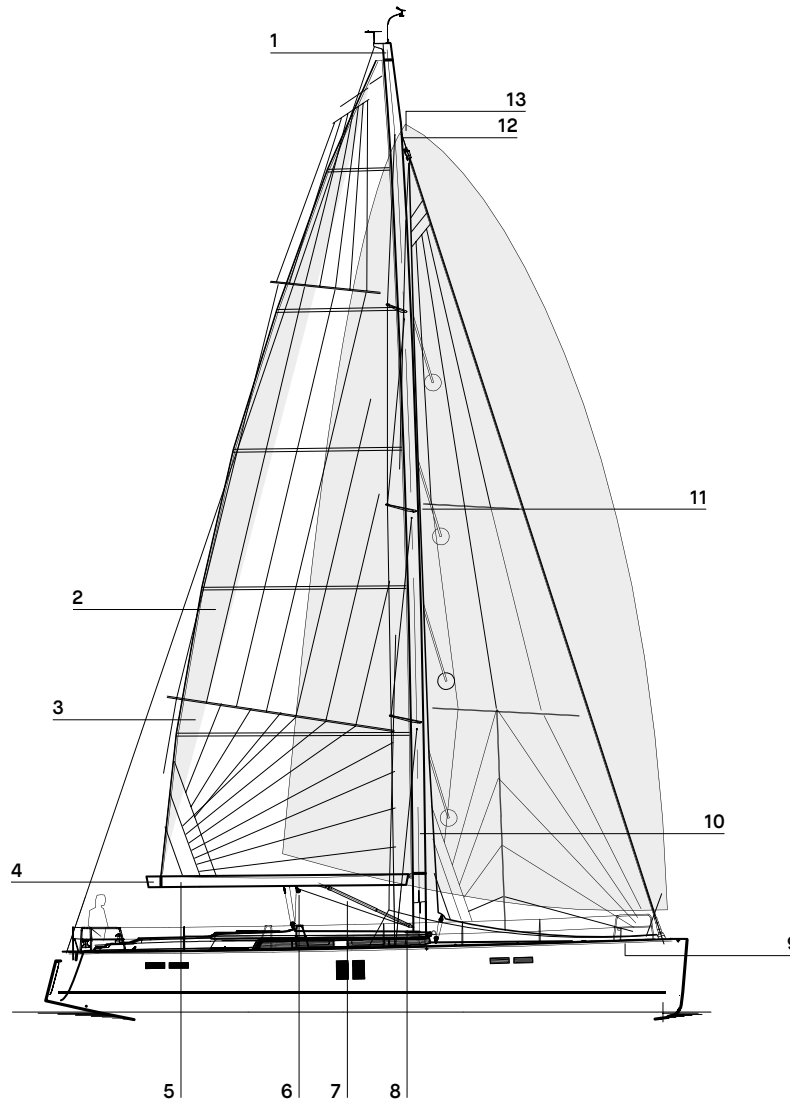

1. Main Halyard

- Atlanta 24
- Black Sea 35
- Harbour 36

2. Boom Topping Lift

- Bensy Competition 26
- Star Cup 38
- Star Cup Color 38

3. Boom Topping Lift

- Eyre 33
- Titanic Color 34
- Star Cup 38
- Star Cup Color 38

4. Spinnaker / Asymmetrical

- Star Cup 38
- Star Cup Color 38

5. Outhaul

- Eyre 33
- Titanic 34
- Titanic Color 34

6. Main Sheet

- Star Cup Color 38
- Star Cup 38
- Top Sea 40
- Regatta Color 39

7. Kicking Sheet

- Eyre 33
- Titanic 34
- Titanic Color 34

8. Genoa Sheet

- Star Cup Color 38
- Regatta Color 39

9. Pole Down

- Bensy Competition 26
- Eyre 33
- Titanic 34
- Titanic Color 34

10. Cunningham

- Darwin 33
- Titanic Color 34
- Star Cup 38
- Star Cup Color 38

11. Pole Up

- Darwin 33
- Titanic Color 34
- Star Cup 38
- Star Cup Color 38

12. Spinnaker Halyard

- Racing 25
- Black Sea 35
- Windy 36
- Harbour 36


13. Genoa Halyard

- Racing 25
- Titanic 34
- Titanic Color 34

*Within the line of recommended ropes there is a wide range of our products for the same use.

Notes



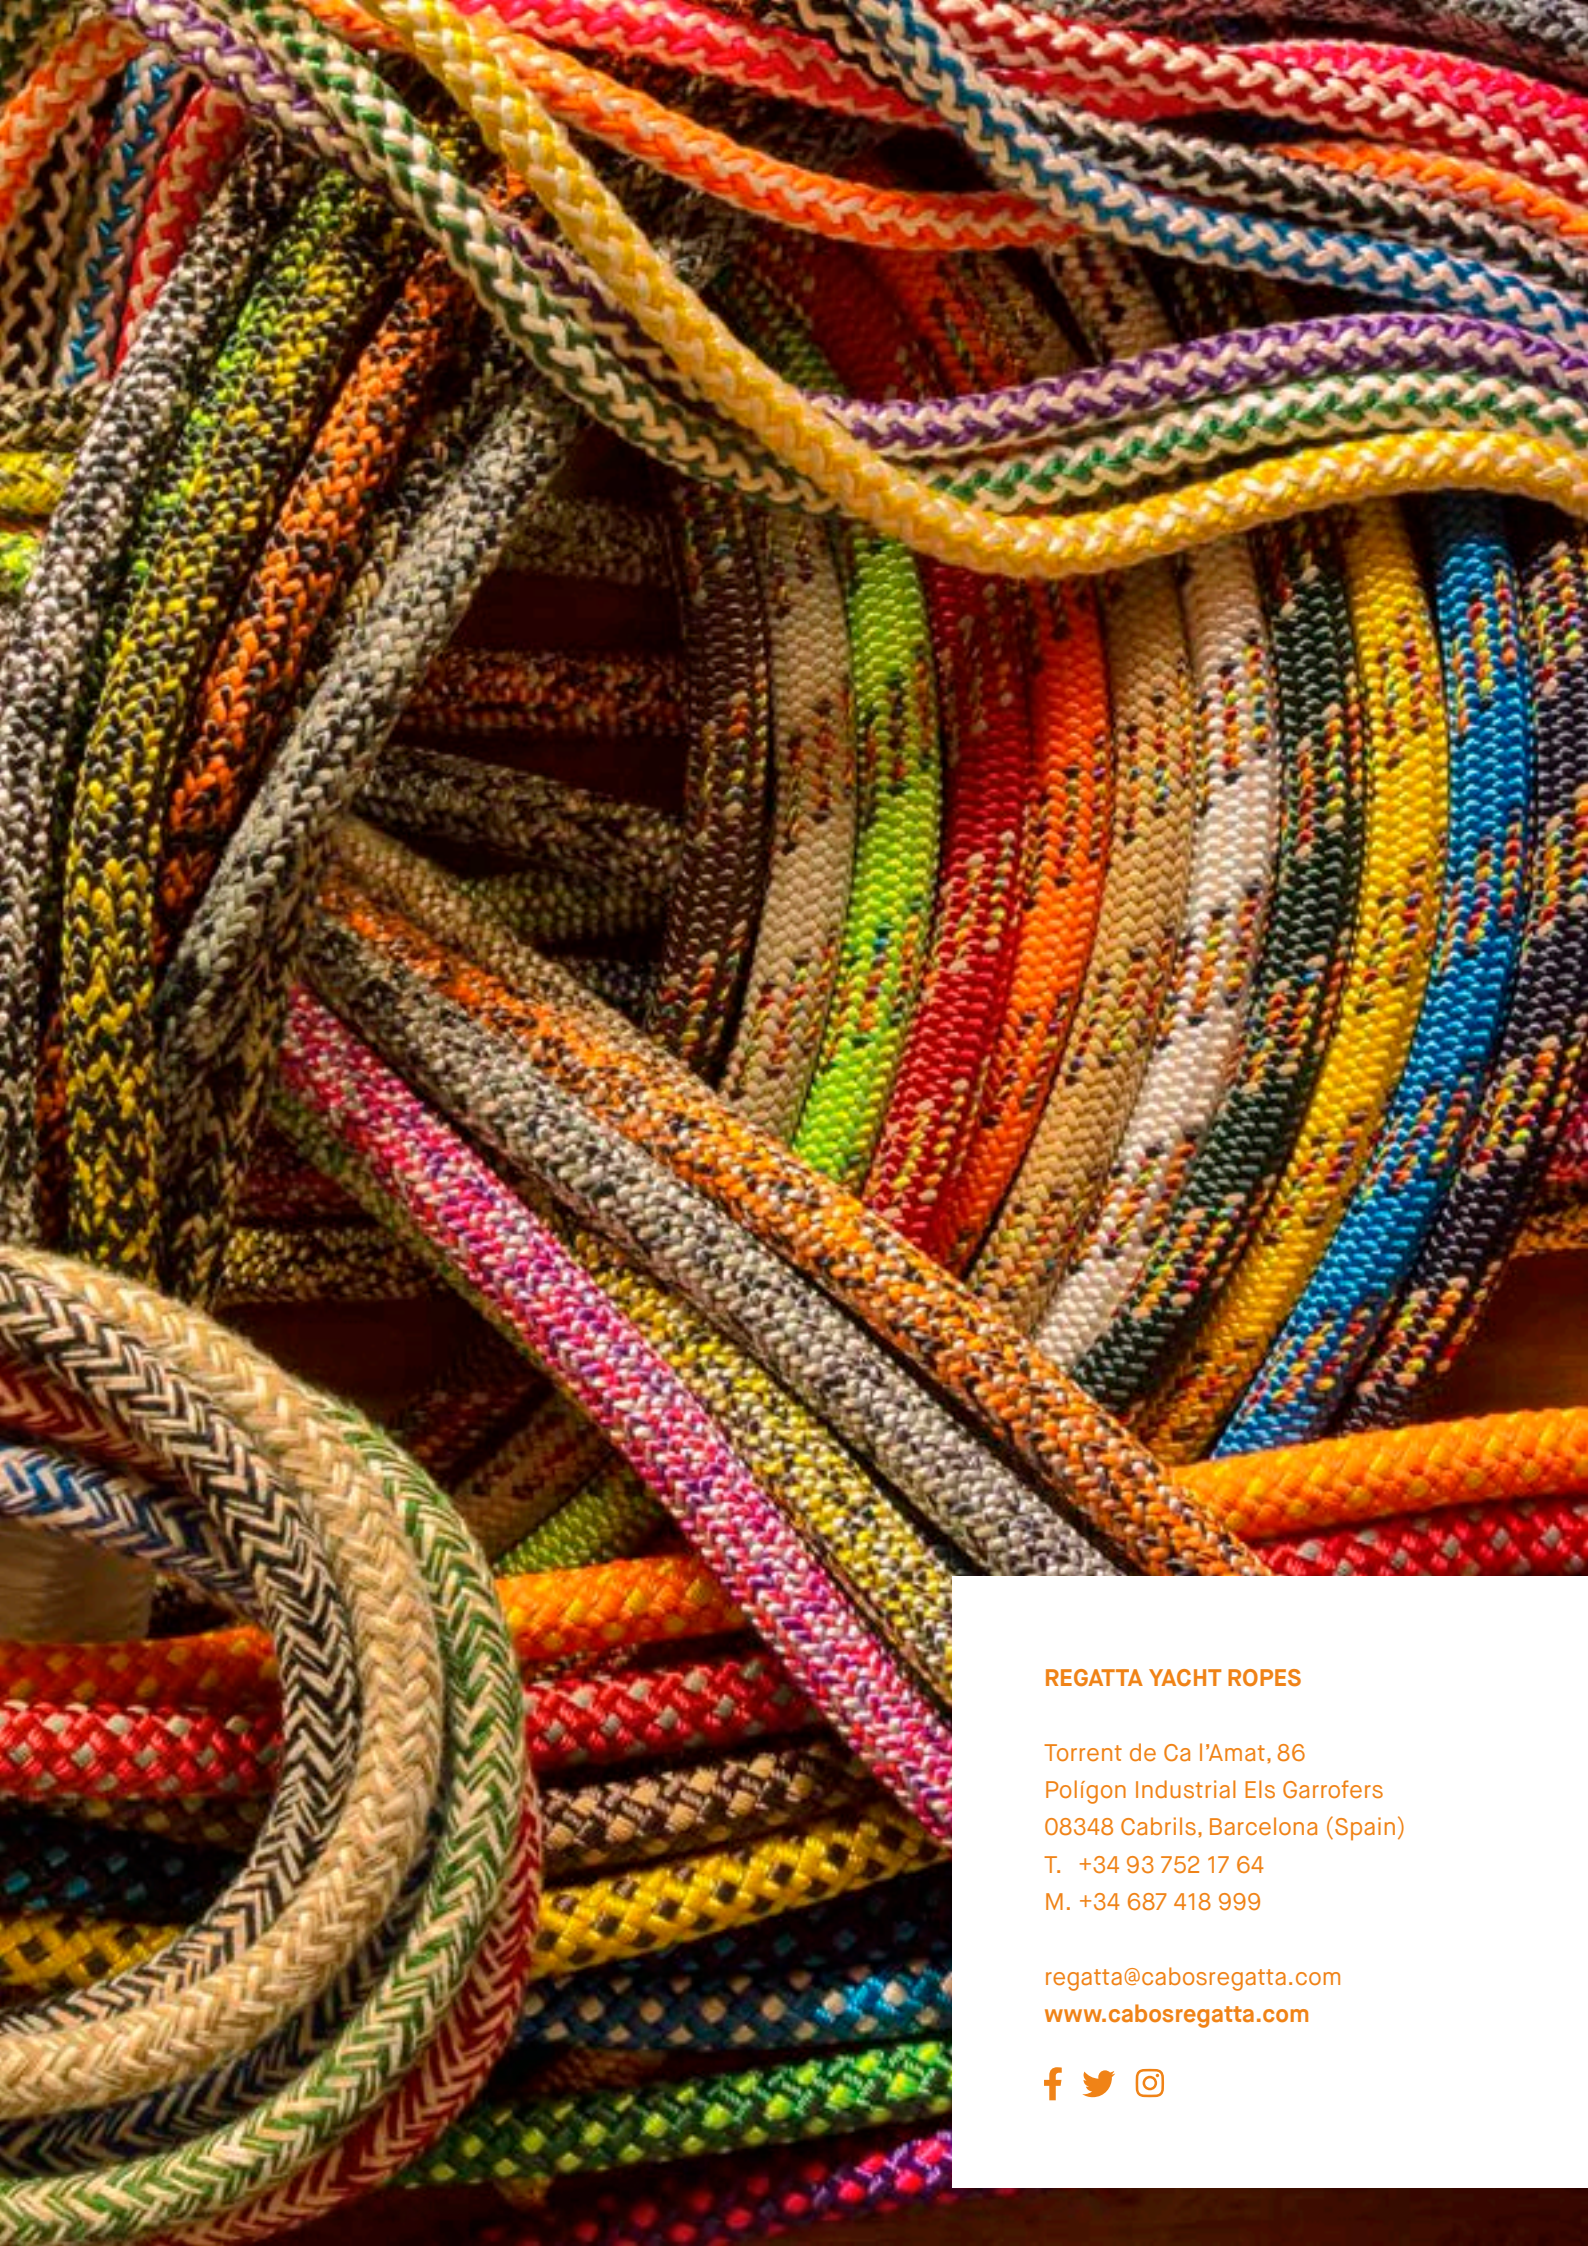

REGATTA YACHT ROPES

Torrent de Ca l'Amat, 86
Polígon Industrial Els Garrofers
08348 Cabriels, Barcelona (Spain)
T. +34 93 752 17 64
M. +34 687 418 999

regatta@cabosregatta.com
www.cabosregatta.com

