



High performance ropes





# Our Company

---

REGATTA YACHT ROPES, with more than 30 years of experience in the nautical sector, together with the latest generation technology used in our production process, enjoys a well-deserved recognition at the national and international level and benchmark and trustworthy brand of athletes from different disciplines. The company has a long history that supports our products.

Founded by Mr José Luís Medina in 1987, today the company continues to uphold the values that the founding partner always transmitted to his team, although it has become even more professional in all areas of the company: production, marketing, administration, as well as the direction and management of the company, which makes us even stronger and more competitive, while maintaining the seal and identity of the founding partner that we have always characterized. We follow the quality standards and the production process endorsed by obtaining ISO-9001 and the homologation of our duly calibrated and certified ropes.

The product of the REGATTA brand is of the highest quality, we have fibers of the highest performance such as Technora®, Vectran®, Kevlar®, Dyneema®, Cordura® Nomex® and other more conventional

fibers as Polyester, Polypropylene or Nylon that follow us to develop any type of rope for different sectors: nautical, sport or industry.

Thanks to the latest technology, to the research of our I+D+I department and our excellent and professional team in creativity, development, manufacturing, technical advice and after-sales service, we can satisfy all kind of request from our customers manufacturing personalized designs.

From its beginnings, REGATTA YACHT ROPES maintains a firm commitment with the environment. During our manufacturing process, we use energy-saving control systems which ensure the health of our company and our environment, as well as the recycling of the materials used in the production process.

REGATTA YACHT ROPES does not use other trademarks and thanks to our design, innovation and technology, intrinsic values of our brand we will be recognized and differentiated. Our commitment to the customer is maximum, paying close attention to their needs, adapting to the particular request of each one.

## GROWING UP TOGETHER

---

### Support

+34 937 521 764  
+34 687 418 999

### Timetable

Monday to Thursday  
from 8am to 13.30pm - 15.30 to 18pm  
Friday from 7am to 15pm







## Our Quality

---

All our ropes are created and developed with the strictest quality controls and with the latest and sophisticated technology of the market.

The yellow/grey mark is a symbol and guarantee of our products.

The REGATTA YACHT ROPES - Star Mar, SA Quality Management System is certified for achieving the ISO 9001:2015 requirements.

MADE IN SPAIN  
  
BARCELONA

The yellow/grey mark is symbol and guarantee of our products.



## Technical terms

---

**REGATTA CS**  
Coating System  


It is a special polyethylene coating treatment that allows us to improve the abrasion and UV resistance.

**REGATTA HSS**  
Heat Stretch System  


It is a technical procedure which consists in heating and tightening the rope in order to achieve a high breaking strength and a minimum stretch.

## Fibers

---

**Dyneema®**

**Vectran™**

**CORDURA®**

**technora®**  
The Power of Aramid

 **CORDEX**

**Kevlar®** 

**LUMAT**  
SMART YARN SOLUTIONS

All the REGATTA YACHT ROPES® - Star Mar, SA rights are reserved.  
The information of this catalogue is approximate.

## 01

**America's Cup line**

- 10 Olympus
- 11 Ocean Race
- 12 Platinum-90
- 13 Oceanic Vectran
- 14 Kevlar Competition
- 15 Dynatron Plus
- 16 Regatta Reflective
- 17 Marina-Pro
- 18 Burton SK-90

## 02

**Protection Covers**

- 20 Dyneema Protect
- 20 Technora Protect
- 21 Vectran Protect
- 21 Kevlar/Polyester HT Protect
- 22 Technora/Polyester HT Protect
- 22 Polyester HT Protect

## 03

**Performance Line**

- 24 Futura
- 24 Atlanta
- 25 Racing
- 25 Vectran Virginia
- 26 Betsy Competición
- 26 Yuca
- 27 Marbella
- 27 Bali
- 28 Spring Sport
- 28 Alaska
- 29 Albany
- 29 Lua

## 04

**Cruising**

- 32 Gregal
- 32 Elba
- 33 Darwin
- 33 Eyre
- 34 Titanic Color
- 34 Titanic
- 35 Lyon
- 35 Black Sea
- 36 Windy
- 36 Harbour
- 37 Lena
- 37 Bora Bora
- 38 Star Cup
- 38 Star Cup Color
- 39 Sira
- 39 Regatta Color
- 40 Top Sea
- 40 Xaloc Color

## 05

**Dinghy**

- 42 Mónaco
- 42 Dynacord
- 43 Dynatec
- 43 Marine Plus
- 44 Super Hobie F-18
- 44 Dyna Speed
- 45 Excel Vectran
- 45 Omega
- 46 Caribe Mix
- 46 Evelyn
- 47 Bouvet
- 47 Breta
- 48 Hobie Competition
- 48 Sea Red
- 49 Sea Blue

## 06

**Mooring**

- 52 Polyester Rope
- 52 Auckland
- 53 Brisbane
- 53 New Port-Elastic
- 54 Round Line
- 54 Squaline
- 55 Regatta Classic
- 55 Regatta 3-S
- 56 Top Classic
- 56 Top Classic 3-C





07

Sail Maker

- 58 Polyester Webbing
- 58 Regatta Dynema Webbing
- 59 Regatta Anti-Torsion
- 59 Lazy Jack
- 60 Compact Line
- 60 Compact Line Dyneema
- 61 Compact Line Aramida
- 61 Kevlar Aramida

08

Multipurpose

- 64 Super Round
- 64 Polyester Braided Color
- 65 Fender Rope
- 65 Xaloc Multipurpose
- 65 Liferaft Rope
- 66 Floating Haytex
- 66 Ski Nautic
- 67 Shock-Cord
- 67 Shock-Cord Reflective
- 68 Elastic Color
- 68 Sandow Color PP
- 69 Lead Rope
- 69 Textile Shackle

09

70 Rigging Service

10

74 Safety Nets

75 Assorted Boxes

78 Threads and Crafts

Sport

- 80 Kitesurf
- 81 Paragliding
- 82 Balloons
- 83 Parasailing

Others

- 84 Off-road
- 85 Decoration
- 85 Agrorope
- 86 Performing arts
- 87 Horse Riding
- 87 Height Work
- 88 Outdoor Areas
- 88 Arboriculture
- 89 Industry
- 91 Technical Accessories
- 93 Display Racks









# 01 America's Cup Line







# Olympus

REF. 09035

HALYARD/SHEET

**Cover:** Mixed composition: Vectran®, Cordura®, Dyneema® SK-90 and Spun-dyed Polyester HT with UV protection.

**Core:** 100% Dyneema® SK-90, Coating, Heat Stretch System.

**Recommended use:** perfect for halyard , sheet and control lines.

**Working stretch:** < 1%.

**Ø mm:** 6 to 16.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
6	2747	100
8	5315	100
10	6828	100
12	10150	100
14	12720	100
16	16300	100

\*Dyneema® SK-99 on request.



Brown/Beige/Black



Fuchsia/Beige/Lilac



Turquoise/Beige/Blue



Red/Beige/Black



Pistachio/Beige/Green



Orange/Beige/Black

Dyneema®



Vectran™



## Ocean Race

REF. 09090

HALYARD/SHEET



**Construction:** double braided / 8 to 14mm: 32-plaited 1:1.  
**Core:** Dyneema® SK-90, Coating, Heat Stretch System.  
**Cover:** Technora®.  
**Features:** excellent grip and high resistance to high temperatures when passing through the blocks and winches.  
**Recommended use:** ideal rope for sheet, brace and control lines.  
**Working stretch:** <1%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
8	5010	100
10	6630	100
12	9860	100
14	11720	100

\*Other diameters on request.  
\*Dyneema® SK-99 on request.



**REGATTA HSS**  
Heat Stretch System

**REGATTA CS**  
Coating System





# Platinum-90

HALYARD/SHEET

REF. 09099

**Construction:** double braided / 8 to 16mm: 32-plaited 1:1.  
**Core:** Dyneema® SK-90, Coating, Heat Stretch System.  
**Cover:** Technora® and Spun-dyed Polyester HT with UV protection.  
**Features:** high abrasion resistance and great grip in jamming cleats and winches.  
**Recommended use:** excellent for sheet, brace and control lines.  
**Working stretch:** <1%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
8	5010	100
10	6630	100
12	9860	100
14	11720	100
16	16300	100

\*Other diameters and lengths on request.  
\*Dyneema® SK-99 on request.



REGATTA HSS  
Heat Stretch System

REGATTA CS  
Coating System



technora®  
The Power of Aramid



# Oceanic Vectran

REF. 09060

HALYARD/SHEET



**Construction:** double braided / 8 to 16mm: 32-plaited 1:1.  
**Core:** Dyneema® SK-90, Coating, Heat Stretch System.  
**Cover:** Vectran® and Spun-dyed Polyester HT with UV protection.  
**Features:** good fusion between core and cover, low elasticity and extremely resistance to high temperatures up to 300°C.  
**Recommended use:** ideal rope for halyard, runner and textile backstay.  
**Working stretch:** <1%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
8	5010	100
10	6630	100
12	9860	100
14	11720	100
16	16300	100

\*Other diameters on request.  
\*Dyneema® SK-99 on request.



REGATTA HSS  
Heat Stretch System

REGATTA CS  
Coating System



Vectran®





# Kevlar Competición

HALYARD/SHEET

REF. 09070

**Construction:** double braided / 8 to 16mm: 32-plaited 1:1.

**Core:** Dyneema® SK-90, Coating, Heat Stretch System.

**Cover:** Kevlar® and Spun-dyed Polyester HT with UV protection.

**Features:** high resistance to graze and temperature above 400°C. Excellent grip.

**Recommended use:** perfect for halyard, sheet and runner.

**Working stretch:** <1%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
8	5010	100
10	6630	100
12	9860	100
14	11720	100
16	16300	100

\*Dyneema® SK-99 on request.



Yellow/Brown



Yellow/Turquoise



Yellow/Grey



Yellow/Red



Yellow/Green



Yellow/Lilac



Yellow/Black

REGATTA HSS  
Heat Stretch System

REGATTA CS  
Coating System

Dyneema®



Kevlar® DUPONT



# Dynatron Plus

REF. 09018

SHEET



**Construction:** double braided / 6mm: 16-plaited 1:1 - 8 to 16mm:32-plaited 1:1.

**Core:** Dyneema® SK-90, Coating, Heat Stretch System.

**Cover:** Cordura® with Technora® and Spun-dyed Polyester HT with UV protection.

**Features:** the mix of these fibers makes this rope an excellent and high performance sheet with low stretch.

**Recommended use:** ideal rope as a halyard, sheet, brace and control lines.

**Working stretch:** <1%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
6	2590	100
8	5010	100
10	6630	100
12	9860	100
14	11720	100
16	16300	100

\*Dyneema® SK-99 on request.

Dyneema®




REGATTA HSS  
Heat Stretch System

REGATTA CS  
Coating System

technora®  
The Power of Aramid

CORDURA®  
BRAND

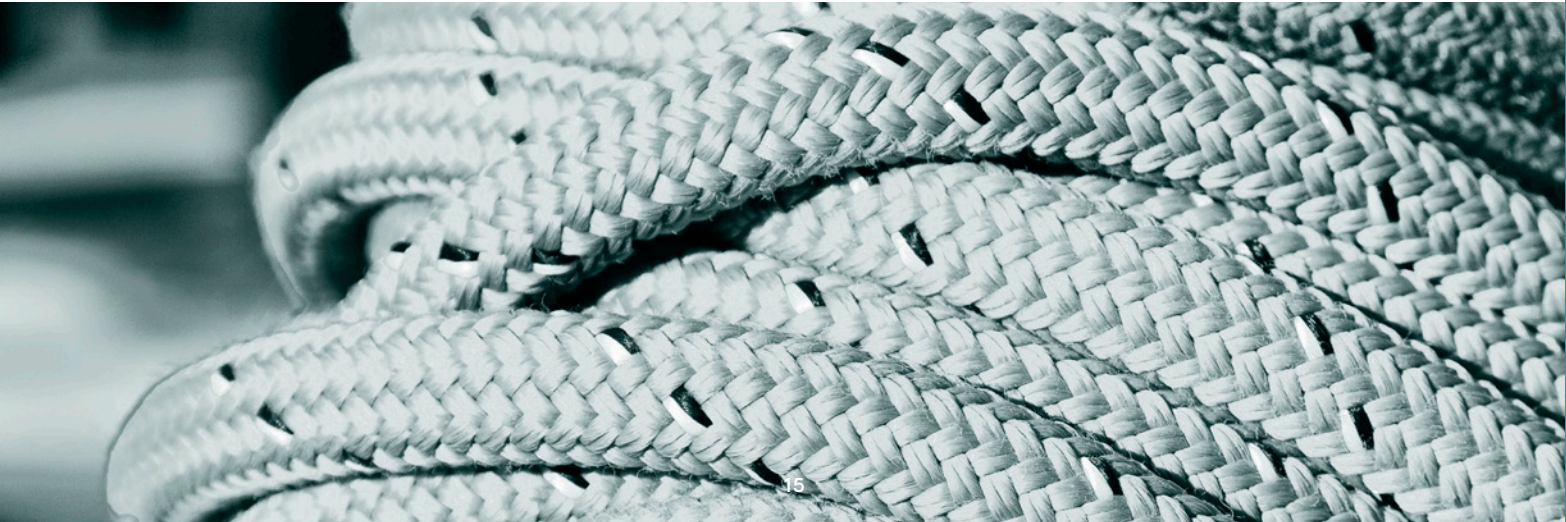



# Regatta Reflective


REF. 09080

HALYARD/SHEET

**Construction:** double braided / 8 to 16mm: 32-plaited 1:1.  
**Core:** Dyneema® SK-90, Coating, Heat Stretch System.  
**Cover:** Spun-dyed Polyester HT with UV protection.  
**Features:** excellent night vision for its reflective line and high resistance to abrasion for its special twisted yarn.  
**Recommended use:** perfect as a halyard, sheet, downhaul and tack.  
**Working stretch:** <1%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
8	5010	100
10	6630	100
12	9860	100
14	11720	100
16	16300	100

\*Other diameters on request.  
\*Dyneema® SK-99 on request.

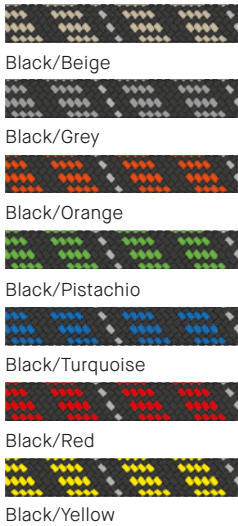

**REGATTA HSS**  
Heat Stretch System

**REGATTA CS**  
Coating System



# Marina-Pro

REF. 09040

HALYARD/SHEET



Beige/Red



Beige/Brown



Beige/Orange



Beige/Navy



Beige/Lilac



Beige/Green



Beige/Turquoise



Beige/White

**Construction:** double braided / 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 1:1.

**Core:** Dyneema® SK-90, Coating, Heat Stretch System.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** very light, great touch and high abrasion resistance.

**Recommended use:** excellent rope as a halyard, sheet, downhaul and tack.

**Working stretch:** <1%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
6	2590	100
8	5010	100
10	5482	100
12	9860	100
14	11720	100
16	16300	100

\*Dyneema® SK-99 on request.

\*Other colours on request.

Dyneema®



REGATTA HSS  
Heat Stretch System

REGATTA CS  
Coating System





# Burton SK-90

HALYARD/SHEET

REF. 02016

**Construction:** double braided / 8 to 16mm: 32-plaited 1:1.  
**Core:** Dyneema® SK-90, Coating, Heat Stretch System.  
**Cover:** Dyneema® SK-78 and Spun-dyed Polyester HT with UV protection.  
**Features:** high resistance to abrasion and good grip.  
**Recommended use:** ideal halyard/sheet for competition with excellent results.  
**Working stretch:** <1%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
8	5010	100
10	6630	100
12	9860	100
14	11720	100
16	16300	100

\*Dyneema® SK-99 on request.



REGATTA HSS  
Heat Stretch System

REGATTA CS  
Coating System



## 02 Protection Covers





Dyneema®

## Dyneema Protect

REF. 07080

MULTIPURPOSE

**Construction:** simple braided / 4 to 20mm: 32-plaited 1:1.

**Composition:** Dyneema® SK-78.

**Features:** waterproof cover, very light and easy to splice.

**Recommended use:** ideal for loops and sheaves.



White



Black

Ø MM	LENGTH (MTS)
4-6	50/100
7-10	50/100
9-13	50/100
14-20	50/100

**technora®**  
The Power of Aramid

## Technora Protect

REF. 07060

MULTIPURPOSE

**Construction:** simple braided / 4 to 20mm: 32-plaited 1:1.

**Composition:** Technora®.

**Features:** easy to splice, high resistance to the cut and at high temperatures up to 400°C.

**Recommended use:** ideal protection against the abrasion when passing through the blocks and winches.



Black



Beige



Beige/Beige

Ø MM	LENGTH (MTS)
4-6	50/100
7-10	50/100
9-13	50/100
14-20	50/100

# Vectran Protect

REF. 07050

MULTIPURPOSE



Beige

**Construction:** simple braided / 4 to 20mm: 32-plaited 1:1.

**Composition:** Vectran®.

**Features:** very light and extremely resistance to high temperatures up to 300°C.

**Recommended use:** thanks to its low coefficient of friction, is a perfect solution to protect and maximize the rope performance which are in a continuous friction.




Ø MM	LENGTH (MTS)
4-6	50/100
7-10	50/100
9-13	50/100
14-20	50/100

# Kevlar/Polyester HT Protect

REF. 70700

MULTIPURPOSE



Yellow/Turquoise



Yellow/Green



Yellow/Black



Yellow/Orange



Yellow/Lilac

**Construction:** simple braided / 4 to 20mm: 32-plaited 1:1.

**Composition:** Kevlar® and Spun-dyed Polyester HT with UV protection.

**Features:** easy to splice, high abrasion resistance and good grip.

**Recommended use:** excellent protection when passing through the blocks and winches.



Ø MM	LENGTH (MTS)
4-6	50/100
7-10	50/100
9-13	50/100
14-20	50/100

\*Other colours on request.





## Technora/Polyester HT Protect

REF. 70800

MULTIPURPOSE

**Construction:** simple braided / 4 to 20mm: 32-plaited 1:1.

**Composition:** Technora® and Spun-dyed Polyester HT with UV protection.

**Features:** high abrasion resistance and easy to splice.

**Recommended use:** ideal cover when passing through the winches and stoppers.

Ø MM	LENGTH (MTS)
4-6	50/100
7-10	50/100
9-13	50/100
14-20	50/100

\*Other colours on request.



Black/Red



Black/Turquoise



Black/Green



Black/Yellow



Black/Grey

## Polyester HT Protect

REF. 07070

MULTIPURPOSE

**Construction:** simple braided / 4 to 20mm: 32-plaited 1:1.

**Composition:** Spun-dyed Polyester HT with UV protection.

**Features:** easy to splice and good abrasion resistance.

**Recommended use:** perfect cover for any repair of halyard and sheet.

Ø MM	LENGTH (MTS)
4-6	50/100
7-10	50/100
9-13	50/100
14-20	50/100

\*Other colours on request.



Black/Red



Black/Turquoise



Black/Green



Black/Yellow



Black/Grey



Black/Orange



# 03 Performance Line





## Futura

REF. 02018

HALYARD/SHEET

**Construction:** double braided / 6 mm : 16 plaited 1:1 - 8 to 16 mm : 32 plaited 1:1.

**Core:** Dyneema® SK-78, Coating, Heat Stretch System.

**Cover:** Polyester HT, Color TM and UV protection.

**Features:** good touch, high resistance to abrasion and light.

**Recommended use:** Excellent as a halyard, sheet, counter control ropes and tack.

**Working stretch:** < 1%

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
6	1600	100
8	4100	100
10	6100	100
12	8100	100
14	10200	100
16	15200	100

\*On request until 20mm.



Black/Yellow



Black/White



Black/Green



Black/Orange



Black/Grey



Black/Navvy



Black/Red



Black/Beige

Dyneema®



## Atlanta

REF. 02004

HALYARD

**Construction:** double braided / 2 to 6mm: 16-plaited 1:1 - 8 to 14mm: 32-plaited 2:2.

**Core:** Dyneema® SK-78. From 8mm additional braided Polyester Spun.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** good durability and extremely light.

**Recommended use:** perfect as a halyard/sheet and control lines.

**Working stretch:** <1.5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
2	240	250
2.5	280	250
3	395	250
4	750	250
5	1050	250
6	2200	200
8	3800	200
10	5000	200
12	6128	200
14	9500	150

\*On request until 20mm.



Navy/Beige



Navy/Grey



Navy/Yellow



Navy/Orange



Navy/Pistachio



Navy/Red



Navy/White



Navy/Turquoise

Dyneema®


## Dyneema®



Black



Grey



Beige



Navy



Red



Turquoise



Green



Orange



Yellow

## Racing

REF. 00998

HALYARD/SHEET

**Construction:** double braided / 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 1:1.

**Core:** Dyneema® SK-78. From 10mm additional braided Polyester Spun.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** great touch and highly resistance to abrasion.

**Recommended use:** perfect as a halyard/sheet and control lines.

**Working stretch:** <1.5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
6	2200	200
8	3800	200
10	5000	200
12	6128	200
14	9500	150
16	11500	100

\*On request until 20mm.



## Vectran™



Turquoise/Yellow



Red/Black



Pistachio/Brown



Orange/Grey



Navy/Beige

## Vectran Virginia

REF. 00196

HALYARD

**Construction:** double braided / 1.5 to 6mm: 16-plaited 1:1 - 8 to 14mm: 32-plaited 1:1.

**Core:** Vectran®. From 8mm additional braided Polyester Spun.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** high performance rope, good grip in jamming cleats and low stretch.

**Recommended use:** ideal for halyard, sheet, brace and backstay.

**Working stretch:** <1%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
1.5	150	250
2	200	250
2.5	260	250
3	380	250
4	740	250
5	850	250
6	1200	200
8	2400	200
10	3500	200
12	5000	200
14	6300	150



## Bensy Competición

REF. 00992

HALYARD/SHEET

Dyneema®

**Construction:** double braided / 1 to 6mm: 16-plaited 1:1 - 8 to 14mm: 32-plaited 1:1.

**Core:** Dyneema® SK-78. From 10mm additional braided Polyester Spun.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** high abrasion resistance and great touch.

**Recommended use:** perfect as a halyard and topping lift.

**Working stretch:** <1.5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
1	40	250
1.5	120	250
2	200	250
2.5	225	250
3	280	250
4	750	250
5	1050	250
6	2200	200
8	3800	200
10	5000	200
12	6128	200
14	9500	150

\*On request until 20mm.



White/Beige



White/Grey



White/Red



White/Yellow



White/Pistachio



White/Orange



White/Turquoise

## Yuca

REF. 02029

HALYARD

Dyneema®

**Cover:** Spun-dyed Polyester HT with UV protection, special torsion and abrasion resistance.

**Core:** Dyneema® SK-78 and Polyester HT mixed.

**Recommended use:** perfect as a Halyard for cruising, competition and dinghy.

**Working stretch:** <3%

**Ø mm:** from 6 to 16mm

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
6	1216	200
8	2072	200
10	3784	200
12	4961	200
14	6673	150
16	8099	100

\*On request until 20mm.



Grey/Multicolor



Red/Multicolor



Brown/Multicolor



Beige/Multicolor



Navy/Multicolor



Pistachio/Multicolor



Yellow/Multicolor



Turquoise/Multicolor



White/Multicolor



Black/Multicolor



Orange/Multicolor



## Dyneema®



Orange/Black/White



Turquoise/Black/White



Yellow/Black/White



Grey/Black/White



Lilac/Negro/White



Beige/Black/White



Red/Black/White



Pistachio/Black/White

## Marbella

REF. 07019

HALYARD

**Cover:** Spun-dyed Polyester HT with UV protection, special torsion and abrasion resistance.

**Core:** Mixed composition Haytex® and Dyneema® SK-78. No water absorption (Damp-proof)

**Recommended use:** Excellent halyard for racing, cruising competition and control lines.

**Working stretch:** <3%

**Ø mm:** From 4 to 14mm

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	510	250
5	849	250
6	1216	200
7	1438	200
8	1994	200
10	2966	200
12	3554	200
14	4347	150



## Dyneema®



Orange/Yellow



Beige/Brown



Pistachio/Green



Red/Black



White/Lilac



Grey/Black



Turquoise/Black

## Bali

REF. 00550

SHEET

**Cover:** Spun-dyed Polyester HT with UV protection, special torsion and abrasion resistance.

**Core:** Mixed Polyester HT with Dyneema® SK-78. Low stretch.

**Recommended use:** Ideal rope as a Main sheet and spinnaker for racing, cruising and dinghy.

**Working stretch:** <3%

**Ø mm:** From 4 to 14mm

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	510	250
5	849	250
6	1216	200
7	1438	200
8	1994	200
10	2966	200
12	3554	200
14	4347	150





## Spring Sport

REF. 08083

HALYARD

Dyneema®

**Construction:** double braided / 4 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 1:1.

**Core:** Dyneema® SK-78 and Haytex® HT. From 10mm additional braided Polyester Spun.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** comfortable touch, very light and high abrasion resistance.

**Recommended use:** excellent as a halyard/sheet for cruising and competition.

**Working stretch:** <3%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	590	250
5	922	250
6	1284	200
8	2140	200
10	3852	200
12	5029	200
14	6741	150
16	8667	100

\*On request until 20mm.



Yellow/Grey



Grey/Red



Lilac/Pistachio



Brown/Beige



Black/Grey



Navy/Turquoise

## Alaska

REF. 00994

HALYARD

Dyneema®

**Construction:** double braided / 4 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 1:1.

**Core:** Dyneema® SK-78 and Polyester HT. From 10mm additional braided Polyester Spun.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** great touch and long life.

**Recommended use:** ideal halyard/sheet for cruising, regattas, competition and control lines.

**Working stretch:** <3%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	570	250
5	902	250
6	1216	200
8	2072	200
10	3784	200
12	4961	200
14	6673	150
16	8599	100

\*On request until 20mm.



Orange



Brown



Black



Navy



Grey



Red



Green



Beige



Yellow

## Dyneema®



Grey



Orange



Pistachio



Brown



Turquoise



Lilac



Navy

## Albany

REF. 02115

SHEET

**Construction:** double braided / 4 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 1:1.

**Core:** Dyneema® SK-78 and Polyester HT. From 10mm additional braided Polyester Spun.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** good grip in winches and jamming cleats.

**Recommended use:** excellent quality as halyard/sheet in regattas and cruising.

**Working stretch:** <3%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	570	250
5	902	250
6	1216	200
8	2072	200
10	3784	200
12	4961	200
14	6673	150
16	8599	100

\*Other colours on request.



## Dyneema®



Grey/Black



Grey/Brown



Grey/Green



Grey/Red



Grey/Yellow



Grey/Turquoise



Grey/Navy

## Lua

REF. 04010

HALYARD

**Construction:** double braided / 4 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 1:1.

**Core:** Dyneema® SK-78 and Haytex® HT. From 10mm additional braided Polyester Spun.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** very light, few stretch and highly resistance to abrasion.

**Recommended use:** perfect rope for halyard/sheet, multipurpose and control lines.

**Working stretch:** <3%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	590	250
5	922	250
6	1284	200
8	2140	200
10	3852	200
12	5029	200
14	6741	150
16	8667	100









# 04 Cruising



## Gregal

REF. 02402

HALYARD

**Construction:** double braided/ 4 to 6 mm: 16 plaited 1:1 - 8 to 16 mm: 32 plaited 1:1

**Cover:** Polyester HT, Color TM and protection UV.

**Core:** polyester HT.

**Features:** high resistance to abrasion and good touch.

**Recommended use:** perfect for competition, cruising and dinghy.

**Working stretch:** <5%

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	380	250
5	600	250
6	800	200
7	1050	200
8	1600	200
10	2345	200
12	3500	200
14	4500	150
16	5000	100



Red/Black/Grey



Orange/Black/Grey



Yellow/Black/Grey




Green/Pistachio/Grey



Blue/Turquoise/Grey



Fuchsia/Lilac/Grey



Brown/Beige/Grey



Black/Grey/White

## Elba

REF. 02230

HALYARD

**Construction:** Double braided / 4 to 6mm: 16-plaited 1:1 and 8 to 16mm: 32-plaited 2:2

**Core:** Polyester 100% HT.

**Cover:** Spun-dyed Polyester HT, color TM, with UV protection.

**Recommended use:** Perfect halyard for cruising, dinghy and multipurpose.

**Working stretch:** <5%

**Ø mm:** from 5 to 16

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	370	250
5	600	250
6	800	200
8	1600	200
10	2500	200
12	3500	200
14	4500	150
16	5000	100



Yellow/Orange



Yellow/Brown



Pistachio/Green



Lilac/Fuchsia



Turquoise/White



Turquoise/Black



Beige/Brown



Grey/Red



## Darwin

REF. 07006

HALYARD



Navy/Beige



Navy/Grey



Navy/Yellow



Navy/Orange



Navy/Pistachio



Navy/Turquoise



Navy/Red



Navy/White

**Construction:** double braided / 4 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 2:2.

**Core:** Polyester HT.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** easy to splice and non-slip.

**Recommended use:** excellent for cruising and control lines.

**Working stretch:** <5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	370	250
5	600	250
6	814	200
8	1600	200
10	2503	200
12	3500	200
14	4500	150
16	5000	100

\*On request until 20mm.



## Eyre

REF. 07012

HALYARD



Beige



Red



Navy



Grey



Turquoise



Brown



Pistachio



Black



Yellow



Orange

**Construction:** double braided / 4 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 2:2.

**Core:** Polyester HT.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** excellent grip on winches and jamming cleats. Soft touch.

**Recommended use:** ideal as a halyard/sheet and multipurpose.

**Working stretch:** <5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	370	250
5	600	250
6	800	200
8	1416	200
10	2503	200
12	3500	200
14	4500	150
16	5000	100

\*On request until 20mm.

\*Other colours on request.



## Titanic Color

REF. 00604

HALYARD

**Construction:** double braided / 4 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 2:2.

**Core:** Polyester HT.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** non-slip in stoppers, high resistant and quality.

**Recommended use:** perfect rope for cruising, dinghy and multipurpose.

**Working stretch:** <5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	370	250
5	600	250
6	800	200
8	1600	200
10	2500	200
12	3500	200
14	4500	150
16	5000	100

\*On request until 20mm.



Navy/Beige



Navy/Pistachio



Navy/White



Navy/Red



Navy/Turquoise



Navy/Grey



Navy/Yellow



Navy/Orange

## Titanic

REF. 00603

HALYARD

**Construction:** double braided / 3 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 2:2.

**Core:** Polyester HT.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** high resistance, good quality, easy to splice and non-slip.

**Recommended use:** good quality halyard for cruising, for several yacht measures and multipurpose.

**Working stretch:** <5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
3	140	250
4	370	250
5	600	250
6	800	200
8	1600	200
10	2500	200
12	3500	200
14	4500	150
16	5000	100

\*On request until 20mm.



White/Black



White/Yellow



White/Grey



White/Orange



White/Red



White/Green



White/Beige



White/Turquoise

## Lyon

REF. 02023

HALYARD



Orange/White/Black



Grey/White/Black



Red/White/Black



Pistachio/White/Black



Lilac/White/Black



Yellow/White/Black



Turquoise/White/Black

**Construction:** double braided / 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 1:1.

**Core:** Haytex® HT.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** high abrasion resistance, good grip in winches and jamming cleat. Very light.

**Recommended use:** excellent halyard for cruising, nautical schools and multipurpose.

**Working stretch:** <5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
6	800	200
8	1600	200
10	2500	200
12	3500	200
14	4500	150
16	5000	100



## Black Sea

REF. 02019

HALYARD



Black/Beige



Black/Grey



Black/Orange



Black/Pistachio



Black/ Turquoise



Black/Red



Black/Yellow



Black/White



Black/Lilac

**Construction:** double braided / 3 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 1:1.

**Core:** Polyester HT.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** easy to splice and long-lasting rope even when passing through the jamming cleats.

**Recommended use:** ideal for cruising, nautical schools, control lines and multipurpose.

**Working stretch:** <5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
3	140	250
4	380	250
5	600	250
6	800	200
8	1600	200
10	2500	200
12	3500	200
14	4500	150
16	5000	100

\*On request until 20mm..





## Windy

REF. 02020

HALYARD

**Construction:** double braided / 4 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 1:1.

**Core:** Polyester HT.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** the special torsion of its threats gives a good grip and high abrasion resistance.

**Recommended use:** perfect halyard for cruising, dinghy and multipurpose.

**Working stretch:** <5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	370	250
5	600	250
6	800	200
8	1600	200
10	2500	200
12	3228	200
14	4500	150
16	5000	100

\*On request until 20mm.



Multipurpose



Lilac/Pistachio



Grey/Yellow



Turquoise/Beige



Black/Grey



Brown/Beige



Red/Yellow

## Harbour

REF. 02025

HALYARD

**Construction:** double braided / 4 to 6mm: 16-plaited 1:1 - 8 to 16mm: 32-plaited 1:1.

**Core:** Polyester HT.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** high abrasion resistance and low water absorption.

**Recommended use:** excellent for competition, cruising and dinghy.

**Working stretch:** <5%.

Ø MM	BREAKING STRENGTH(KG)	LENGTH (MTS)
4	380	250
5	600	250
6	800	200
7	1050	200
8	1600	200
10	2345	200
12	3500	200
14	4500	150
16	5000	100

\*On request until 20mm.



Beige/Brown



Grey/Black



Turquoise/Navy



Lilac/Navy



Yellow/Orange



Pistachio/Green



Red/Yellow



Navy/Grey

## Dyneema®



Grey/Blue



Grey/Red



Grey/Green



Grey/White



Grey/Orange



Grey/Black



Grey/Yellow



Grey/Lilac



Grey/Pink

## Lena

REF. 00170

SHEET

**Construction:** double braided / 4 to 14mm: 16-plaited 1:1.**Core:** Haytex® HT and Dyneema® SK-78.**Cover:** Spun-dyed PP HT pre- stretched with UV and seawater treatment.**Features:** non-absorbent, low stretch and huge thread twisting.**Recommended use:** special sheet for dinghy, cruising and regatta boats.**Working stretch:** <3%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	495	250
5	824	250
6	1180	200
7	1396	200
8	1936	200
10	2880	200
12	3450	200
14	4220	150



## Bora bora

REF. 00580

SHEET

**Cover:** Spun-dyed Polyester HT with UV protection, special torsion.**Core:** Haytex® HT, high resistance and no water absorption (Damp-proof)**Recommended use:** Perfect as a Main sheet, Spinnaker and sailing.**Working stretch:** <5%**Ø mm:** From 4 to 16mm

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	485	250
5	829	250
6	1207	200
7	1365	200
8	1785	200
10	2867	200
12	3423	200
14	3990	150
16	5292	100



Beige



Orange



Pistachio



Turquoise



Red



Yellow



Grey





# Star Cup

REF. 00605

SHEET

**Construction:** double braided / 4 to 12mm: 16-plaited 1:1 - 14 to 16mm: 32-plaited 2:2.

**Core:** Polyester HT.

**Cover:** Spun-dyed Polyester HT with UV protection.


**Features:** non-slip, abrasion resistance and easy to splice. Heat set.

**Recommended use:** excellent as a main sheet, spinnaker and sailing.

**Working stretch:** <5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	460	250
5	790	250
6	1150	200
7	1300	200
8	1700	200
10	2730	200
12	3260	200
14	3800	150
16	5040	100

\*On request until 20mm.

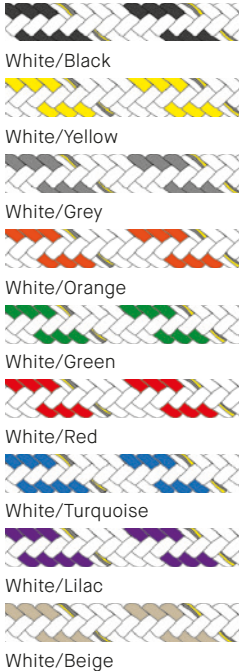

# Star Cup Color

REF. 00502

SHEET

**Construction:** double braided / 4 to 12mm: 16-plaited 1:1 - 14 to 16mm: 32-plaited 2:2.

**Core:** Polyester HT.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** non-slip, abrasion resistance and easy to splice. Heat set.


**Recommended use:** perfect as a main sheet, spinnaker and sailing.

**Working stretch:** <5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	460	250
5	790	250
6	1150	200
7	1300	200
8	1700	200
10	2730	200
12	3260	200
14	3800	150
16	5040	100

\*On request until 20mm.

\*Other colours on request.

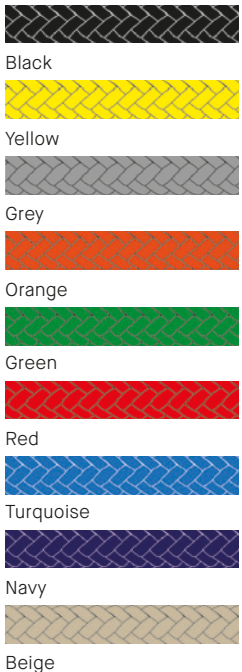

## Sira

SHEET

REF. 00139



White/Yellow



White/Black



White/Beige



White/Green



White/Turquoise



White/Red

**Construction:** Double braided from 5 to 12mm: 16-plaited 1:1 and from 14 to 16 mm: 32-plaited 2:2

**Cover:** Polyester Spun Cotton touch with high resistant threats to the abrasion, spun-dyed colour with UV protection.

**Core:** Polyester HT special torsion.

**Recommended use:** Ideal rope for cruising and dinghy.

**Working stretch:** <5%

**Ø mm:** From 5 to 14mm.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
5	350	250
6	600	200
8	1100	200
10	1900	200
12	2500	200
14	2950	150



## Regatta Color

SHEET

REF. 00135



Red



Green



Yellow



Black



Blue



Beige



White

**Construction:** double braided / 5 to 12mm: 16-plaited 1:1 - 14 to 22mm: 32-plaited 2:2.

**Core:** Polyester HT.

**Cover:** Polyester Spun.

**Features:** high quality Polyester Spun with cotton touch. Easy handling.

**Recommended use:** ideal rope for cruising and dinghy.

**Working stretch:** <5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
5	350	250
6	600	200
8	1100	200
10	1900	200
12	2500	200
14	2950	150

\*On request until 22mm.





## Top Sea

REF. 00149

SHEET

**Construction:** double braided / 6 to 12mm: 16-plaited 1:1 - 14mm: 32-plaited 2:2.

**Core:** Haytex® HT.

**Cover:** Polyester Spun.

**Features:** high quality Polyester with cotton touch.

**Recommended use:** excellent sheet for cruising boats and nautical school.

**Working stretch:** <7%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
6	560	200
8	1090	200
10	1675	200
12	2500	200
14	3060	150



White/Red



White/Green



White/Blue



White/Yellow



White/Black



White/Beige

## Xaloc Color

REF. 00520

FLOATING

**Construction:** simple braided / 4 to 12mm: 16-plaited 2:2.

**Composition:** Polypropylene multifilament HT.

**Features:** floating, Spun-dyed colour with UV protection and seawater treatment.

**Recommended use:** perfect as a towline, water-ski rope, spi sheet and multipurpose.

**Working stretch:** <10%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	295	250
5	420	250
6	556	200
7	783	200
8	930	200
10	1250	200
12	1720	200



Black



Yellow



Orange



Green



Red



Turquoise



Grey





leers

# 05 Dinghy

OMEGA #CleanSeas #TurnTheTideOnPlastic

inmarsat  
SAILOR

BEKING  
TEAM  
Brune  
ENFORD  
tel



## Mónaco

REF. 00158

SHEET

**Core:** Dyneema® SK-78, polyester HT with UV protection.

**Cover:** Mixed composition: Cordura®, Dyneema® SK-78 and Spun-dyed Polyester HT with UV protection.

**Recommended use:** excellent for dinghy, cruising and competition. Low stretch and low water absorption (damp-proof).

**Working stretch:** < 2%

**Ø mm:** From 6 to 14 mm

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
6	1092	200
7	1255	200
8	1392	200
10	2059	200
12	2899	200
14	3760	150

\*On request until 20mm.



Black/Beige/White



Yellow/Navy/White



Grey/Navy/White



Orange/Navy/White



Pistachio/Navy/White



Red/Navy/White



Turquoise/Navy/White



Lilac/Navy/White

Dyneema®



## Dynacord

REF. 00127

SHEET

**Construction:** Simple braided, with Dyneema® SK-78, Cordura® and Spun-dyed Polyester HT, with UV protection.

**Recommended use:** Excellent sheet for dinghy, good grip in jamming cleats, great touch and little water absorption.

**Working stretch:** <3%

**Ø mm:** From 6 to 10 mm

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
6	1112	100/200
7	1700	100/200
8	2400	100/200
9	2760	100/200
10	3240	100/200



White/Green



White/Yellow



White/Turquoise



White/Orange



White/Black



White/Red



White/Pink



White/Lilac

## Dynatec

REF. 04040

SHEET



Beige/Pink



Beige/Turquoise



Beige/Green



Beige/Yellow



Beige/Orange



Beige/Red



Beige/Navy

**Dyneema®**

**technora®**  
The Power of Aramid

**CORDURA**  
BRAND

**Construction:** double braided / 4 to 6mm: 16-plaited 1:1 - 8 to 10mm: 32-plaited 1:1.

**Core:** Dyneema® SK-78, Coating, Heat Stretch System.

**Cover:** Technora® and Cordura®.

**Features:** excellent grip and abrasion with ideal touch.

**Recommended use:** special sheet for dinghy and high competition.

**Working stretch:** <1%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	890	100/200
5	1450	100/200
6	1925	100/200
8	4010	100/200
10	4650	100/200

**REGATTA HSS**  
Heat Stretch System

**REGATTA CS**  
Coating System

## Marine Plus

REF. 04060

HALYARD/SHEET



Lilac/White



Turquoise/White



Red/White



Green/White



Grey/White



Orange/White



Navy/White



Yellow/White



Burgundy/White

**Dyneema®**


**Construction:** double braided / 2 to 7mm: 16-plaited 1:1.

**Core:** Dyneema® SK-78, Coating, Heat Stretch System.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** minimum stretch, very light and easy to handle.

**Recommended use:** excellent halyard/sheet for dinghy and competition.

**Working stretch:** <1%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
2	255	100/200
3	480	100/200
4	800	100/200
5	1100	100/200
6	1640	100/200
7	2320	100/200

\*Other colours on request.

**REGATTA HSS**  
Heat Stretch System

**REGATTA CS**  
Coating System



## Super Hobie F-18

REF. 00021

SHEET

**Construction:** double braided / 4 to 7mm: 16-plaited 1:1 - 8 to 9mm: 32-plaited 1:1.

**Core:** Dyneema® SK-78, Coating, Heat Stretch System.

**Cover:** Cordura® and white Spun-dyed Polyester HT with UV protection.

**Features:** excellent grip and touch. Non-slip and high resistant to friction.

**Recommended use:** perfect as a halyard, spi sheet and control lines.

**Working stretch:** <1%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	890	100/200
5	1450	100/200
6	1925	100/200
7	2800	100/200
8	4010	100/200
9	4650	100/200

\*On request until 20mm.

**REGATTA HSS**  
Heat Stretch System

**REGATTA CS**  
Coating System

**CORDURA**  
BRAND



White/Beige



White/Pink



White/Yellow



White/Navy



White/Orange



White/Green



White/Red



White/Turquoise

**Dyneema®**



## Dyna Speed

REF. 00017

HALYARD

**Construction:** simple braided / 1 to 12mm: 12-plaited.

**Composition:** Dyneema® SK-78, Coating, Heat Stretch System.

**Features:** high breaking strength, easy to splice and high floatability.

**Recommended use:** ideal for control ropes, trapeze regulator and multipurpose.

**Working stretch:** <1%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
1	165	100
1,5	260	100
2	480	100
2,5	530	100
3	1125	100
4	1860	100
5	2860	100
6	4180	100
7	6220	100
8	7300	100
10	10500	100
12	14300	100

\*On request until 20mm.

**Dyneema®**



Yellow



Red



Green



Turquoise



White



Silver Grey



Black

**REGATTA HSS**  
Heat Stretch System

**REGATTA CS**  
Coating System


## Excel Vectran

HALYARD

REF. 03010



Dark Grey



Beige

**Vectran®**
**REGATTA CS**

Coating System


**Construction:** simple braided / 2 to 8mm: 12-plaited.

**Composition:** Vectran®, Coating System.

**Features:** minimum stretch, high breaking strength and easy to splice.

**Recommended use:** perfect halyard for trapeze rope and extreme applications in the deck.

**Working stretch:** <1%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
2	430	100
3	980	100
4	1795	100
5	2760	100
6	4650	100
8	6780	100

\*Other diameters on request.



## Omega

SHEET

REF. 00020



White/Pink



White/Turquoise



White/Yellow



White/Green



White/Orange



White/Beige



White/Red



White/Navy

**CORDURA®**
**Dyneema®**
**Construction:** simple braided / 4 to 12mm: 16-plaited 2:2.

**Composition:** Dyneema® SK-78 and Cordura®. Coating System.

**Features:** easy handling, long life and good grip when passing through the jamming cleats.

**Recommended use:** perfect rope for dinghy as a spinnaker, genaker, jib and main sheet.

**Working stretch:** <1.5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	620	100/200
5	870	100/200
6	1235	100/200
7	1890	100/200
8	2665	100/200
10	3610	100/200
12	4650	100/200





## Caribe Mix

SHEET

REF. 09030

**Construction:** double braided / 6mm: 16-plaited 1:1 - 8 to 10mm: 32-plaited 1:1.

**Core:** Dyneema® SK-78 and Polyester HT.

**Cover:** Cordura® and Spun-dyed Polyester HT with UV protection.

**Features:** very light, non-slip and high abrasion resistance.

**Recommended use:** excellent sheet for competition, cruising and dinghy.

**Working stretch:** <3%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
6	1320	200
7	1800	200
8	2200	200
10	3960	200

\*Other diameters and lengths on request.



Navy/Orange



Navy/Yellow



Navy/Blue



Navy/Beige



Navy/Red



Navy/Green



Navy/White



Navy/Pink



Dyneema®

## Evelyn

HALYARD/SHEET

REF. 01645

**Construction:** double braided / 4 to 7mm: 16-plaited 1:1 - 8 to 9mm: 32-plaited 1:1.

**Core:** Dyneema® SK-78 and Haytex® HT.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** low stretch, low water absorption and abrasion resistance.

**Recommended use:** high performance halyard/sheet for cruising and dinghy.

**Working stretch:** <3%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	450	250
5	660	250
6	1040	200
7	1325	200
8	1960	200
9	2320	200

\*On request until 20mm.



Black/White



Black/Beige



Black/Orange



Black/Grey



Black/Yellow



Black/Red



Black/Pistachio



Black/Lilac



Black/Turquoise

Dyneema®

## Bouvet

SHEET

REF. 00155



White/Blue



White/Yellow



White/Green



White/Red



White/Beige



White/Black



Dyneema®

**Construction:** double braided / 6 to 14mm: 16-plaited 1:1.

**Core:** Dyneema® SK-78 and Haytex® HT.

**Cover:** 6 to 8mm: Cordura® and Haytex® HT / 10 to 14mm: Haytex® HT and high quality Polyester Spun.

**Features:** huge thread twisting, very good grip, low stretch and low water absorption.

**Recommended use:** ideal for competition boats, cruising and dinghy.

**Working stretch:** <3%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
6	1040	200
7	1195	200
8	1325	200
10	1960	200
12	2760	200
14	3580	150



## Breta

SHEET

REF. 01610



Yellow/Orange



Yellow/Brown



Yellow/Grey



Yellow/Turquoise



Yellow/Green



Yellow/Red



Yellow/Black



Dyneema®

**Construction:** double braided / 2 to 6mm: 16-plaited 1:1 - 8 to 10mm: 32-plaited 1:1.

**Core:** Dyneema® SK-78 and Haytex® HT.

**Cover:** Kevlar aramid®, Spun-dyed Polyester HT with UV protection.

**Features:** excellent behaviour when passing through the blocks, jamming cleats and winches. High abrasion resistance and good grip.

**Recommended use:** perfect halyard/sheet for dinghy and cruising.

**Working stretch:** <3%.

Ø MM	CARGA DE ROTURA (KG)	LONGITUD CARRETE (MTS)
2	120	100/200
3	290	100/200
4	450	100/200
5	710	100/200
6	1040	100/200
7	1325	100/200
8	1960	100/200
10	2760	100/200

\*Dyneema® SK-78 core, Coating, Heat Stretch System on request.





## Hobie Competition

HALYARD

REF. 00227

**Construction:** double braided / 4 to 7mm: 16-plaited 1:1.

**Core:** Dyneema® SK-78.

**Cover:** Dyneema® SK-78 and Spun-dyed Polyester HT with UV protection.

**Features:** very light and extremely resistant to abrasion.

**Recommended use:** excellent for windsurf and dinghy.

**Working stretch:** <1.5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	770	100/200
5	990	100/200
6	1505	100/200
7	2200	100/200

\*Dyneema® SK-78 core, Coating, Heat Stretch System on request.



White/Turquoise



White/Red



White/Green



White/Grey



White/Orange



White/Burgundy



White/Navy

Dyneema®

## Sea Red

HALYARD

REF. 00975

**Construction:** double braided / 1.5mm to 6mm: 16-plaited 1:1.

**Core:** Dyneema® SK-78.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** long-lasting rope and extremely resistance to abrasion.

**Recommended use:** perfect for windsurf and dinghy.

**Working stretch:** <1.5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
1.5	47	100/250
2	120	100/250
3	280	100/250
4	770	100/250
4.5	895	100/250
5	990	100/250
6	1505	100/200



Lilac



Turquoise



Red



Green



Yellow



Grey

Dyneema®

# Sea Blue

REF. 00680

HALYARD



Black/Grey



Black/Yellow



Black/Red



Black/Turquoise



Black/Pistachio



Black/Orange



Black/White

**Construction:** double braided / 1 to 6mm: 16-plaited 1:1.

**Core:** Polyester HT.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** very light, easy handling and long-lasting rope.

**Recommended use:** specially designed for windsurf and dinghy.

**Working stretch:** <5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
1	15	250
1.5	35	250
2	65	250
3	110	250
4	370	250
5	600	250
6	800	200



Pablo Mas







## 06 Mooring





## Polyester Rope

REF. 00240/00241/00080

**Construction:** 3 strands. Double twisted / 4 to 20mm.


**Core:** Spun-dyed Polyester HT with UV protection.

**Features:** easy to splice, high breaking strength, not becomes rigid and excellent touch.

**Recommended use:** perfect for mooring and anchoring rope.

**Working stretch:** <15%.

MOORING



Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	470	250
5	600	250
6	780	200
8	1450	200
10	1950	200
12	2700	200
14	3600	150
16	5000	100
18	6100	100
20	7200	100

\*On request until 30mm.

## Auckland

REF. 07007

**Construction:** double braided / 8 to 14mm: 16-plaited 1:1 - 16 to 20mm: 32-plaited 1:1.

**Core:** Polyester HT.

**Cover:** Spun-dyed Polyester HT and UV protection.

**Features:** easy handling, abrasion resistance, nice touch and great elasticity.

**Recommended use:** ideal for mooring and multipurpose.


**Working stretch:** <25%.

MOORING



Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
8	1550	200
10	2200	200
12	3300	200
14	4000	150
16	4800	100
18	6400	100
20	7100	100

\*On request until 30mm.

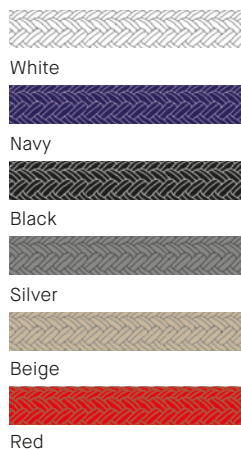

**REGATTA CS**  
Coating System



## Brisbane

REF. 07009

MOORING

**Construction:** double braided / 12 to 24mm: 24-plaited 1:1.

**Core:** Polyester HT.

**Cover:** Spun-dyed Polyester HT and UV protection.

**Features:** special treatment against the abrasion (REGATTA CS), very flexible and long-lasting rope.

**Recommended use:** excellent mooring for Super Yachts between 70 to 200 feet.

**Working stretch:** <20%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
12	3600	200
14	4300	100
16	4900	100
18	5500	100
20	8600	100
22	11650	100
24	13000	100

\*On request until 40mm.

\*Other colours on request: beige and red.



## New Port-Elastic

REF. 00780

MOORING

**Construction:** double braided / 12 to 22mm: 32-plaited 2:2.

**Core:** Polyester HT.

**Cover:** Spun-dyed Polyester HT with UV protection.


**Features:** high elasticity, easy handling and highly resistant to abrasion.

**Recommended use:** perfect rope for mooring and multipurpose.

**Working stretch:** <25%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
12	3800	200
14	4900	150
16	6100	100
18	8300	100
20	9800	100
22	10800	100

\*On request until 44mm.

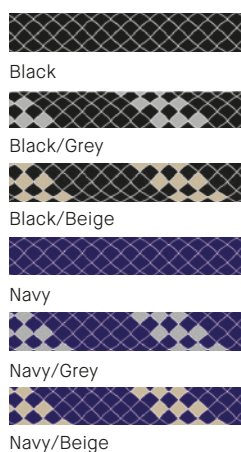



# Round Line


MOORING

REF. 00785

**Construction:** simple braided / 10 to 22mm.  
**Composition:** Spun-dyed Polyester HT with UV protection.  
**Features:** extremely flexible, high elasticity and very easy to handle.  
**Recommended use:** ideal for mooring and multipurpose.  
**Working stretch:** <26%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
10	2450	200
12	2800	200
14	3500	200
16	4320	100
18	5250	100
20	5680	100
22	6225	100

\*On request until 44mm.  
 \*Other colours on request: grey, hemp and burgundy.



# Squarline


MOORING

REF. 01724/01726/01728

**Construction:** 8 strands / 14 to 30mm.  
**Composition:** Spun-dyed Polyester HT with UV protection.  
**Features:** soft and easy to handle. Abrasion resistant and non-slip.  
**Recommended use:** perfect rope for mooring and anchoring rope.  
**Working stretch:** <20%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
14	2957	200
16	3569	100
18	4180	100
20	4588	100
22	5098	100
24	5812	100
26	6628	100
28	8565	100
30	9840	100

\*On request until 40mm.



## Regatta Classic

MOORING

REF. 01272



Hemp

**Construction:** double braided / 4 to 12mm: 16-plaited 1:1 - 14 to 20mm: 32-plaited 1:1.

**Core:** Polyester HT.

**Cover:** Polyester Spun.

**Features:** high quality, nice touch and looks like hemp.

**Recommended use:** excellent for yachts, classic sailboats, decoration and multipurpose.

**Working stretch:** <5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	350	250
5	420	250
6	600	200
8	1050	200
10	1500	200
12	2400	200
14	2900	150
16	3600	100
18	4650	100
20	5300	100

\*On request with Dyneema® SK-78 core.



## Regatta 3-S

MOORING

REF. 01273



Hemp

**Construction:** 3 strands. Double twisted / 4 to 20mm.

**Composition:** high quality Polyester Spun.

**Features:** high quality rope, nice touch and looks like hemp.

**Recommended use:** ideal rope for yachts, classic sailboats, decoration and multipurpose.

**Working stretch:** <15%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	160	200
6	350	200
8	730	200
10	1100	200
12	1300	200
14	1700	150
16	2300	100
18	3800	100
20	4980	100

\*On request until 44mm.





## Top Classic

REF. 01274

MOORING

**Construction:** double braided / 4 to 12mm: 16-plaited 1:1 - 14 to 20mm: 32-plaited 1:1.

**Core:** Polyester HT.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** abrasion resistant, easy to splice and high quality rope.

**Recommended use:** perfect for yachts, classic sailboats, decoration and multipurpose.

**Working stretch:** <5%.



Beige

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	420	250
5	750	250
6	900	200
8	1700	200
10	2400	200
12	3000	200
14	3800	150
16	4300	100
18	5600	100
20	6700	100

\*On request until 30mm.

\*On request with Dyneema® SK-78 core.

## Top Classic 3-S

REF. 01275

MOORING

**Construction:** 3 strands. Double twisted / 6 to 20mm.

**Composition:** Spun-dyed Polyester HT with UV protection.

**Features:** abrasion resistant, easy to splice and high quality rope.

**Recommended use:** ideal for yachts, classic sailboats, decoration and multipurpose.

**Working stretch:** <15%.



Beige

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
6	580	200
8	1050	200
10	1680	200
12	2400	200
14	3370	150
16	4340	100
18	5480	100
20	6820	100

\*On request until 32mm.




# 07 Sail Maker





## Polyester Webbing

REF. 00704



**Construction:** webbing made with the latest generation looms. From 25 to 50mm.


**Composition:** Spun-dyed Polyester HT with UV protection.

**Features:** high resistance to seawater and very light.


**Recommended use:** special webbing for head, tack, genoa, lacing eye reinforcement and multipurpose.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
25	900	100
30	1100	100
40	1500	100
50	2200	100


\*Other colours on request.



White



Navy



Black

Dyneema®

## Regatta Dyneema Webbing

REF. 07058




**Construction:** webbing made with the latest generation looms /25 and 50mm.

**Composition:** Dyneema® SK-78.

**Features:** high performance webbing and minimum stretch.

**Recommended use:** ideal for sail makers and nautical uses.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
25	1800	25/50
50	2850	25/50



White/Grey



## Regatta Anti-Torsion

REF. 02030



Black



**Construction:** triple braided / 6 to 13mm: 16-plaited 1:1.  
**Core:** Kevlar® aramid plus additional braided Haytex® monofilament.  
**Cover:** Spun-dyed Polyester HT with UV protection.  
**Features:** extremely rigid and high resistance to turns.  
**Recommended use:** perfect rope for asymmetrical furler and code 0.  
**Working stretch:** <1%.



Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
6	1350	100
8	3400	100
11	4150	100
13	5080	100

\*Other diameters and lengths on request.

## Lazy Jack

REF. 00701



Grey

**Construction:** simple braided / 3 to 10mm: 16-plaited 2:2.  
**Composition:** Spun-dyed Polyester HT with UV protection.  
**Features:** seawater treatment and abrasion resistance.  
**Recommended use:** ideal rope for Lazy Jack.



Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
3	330	200
4-5	540	200
6-7	1130	200
8	2200	200
10	3090	200

\*Other colours on request.





## Compact Line

REF. 00638



**Construction:** double braided / 4 to 8mm: 16-plaited 1:1  
- 9 to 10mm: 32-plaited 1:1.

**Core:** Polyester HT.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** very round, compact and low shrinkage.

**Recommended use:** excellent for bolt rope, luff, leech line and multipurpose.

**Working stretch:** <5%.



White

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	290	250
4.5	380	250
5	500	250
5.5	570	250
6	660	200
7	850	200
8	1200	200
9	1600	200
10	1900	200

Dyneema®

## Compact Line Dyneema

REF. 03090



**Construction:** double braided / 2 to 6mm: 16-plaited 1:1.

**Core:** Dyneema® SK-78.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** low stretch, very twisted and high resistant to abrasion.

**Recommended use:** perfect rope for leech line and multipurpose.

**Working stretch:** <1.5%.



White/Grey/Yellow

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
2	250	250
2.5	340	250
3	510	250
4	720	250
5	1000	250
6	1700	200

\*Other diameters on request.

## Compact Line Aramida

REF. 03080



White/Grey/Orange

**Construction:** double braided / 2 to 6mm: 16-plaited 1:1.**Core:** Kevlar® aramid.**Cover:** Spun-dyed Polyester HT with UV protection.**Features:** special rope with low stretch and high resistant to abrasion.**Recommended use:** excellent for leech line and multipurpose.**Working stretch:** <1.5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
2	210	250
2.5	280	250
3	420	250
4	640	250
5	880	250
6	1030	200

\*Other diameters on request.

## Kevlar Aramida

MULTIPURPOSE

REF. 00300



White/Blue/Yellow

**Construction:** double braided / 1.5 to 6mm: 16-plaited 1:1 - 8 to 14mm: 32-plaited 2:2.**Core:** Kevlar® aramid. From 8mm additional braided Polyester Spun.**Cover:** Spun-dyed Polyester HT with UV protection.**Features:** high resistant, low stretch and UV protection.**Recommended use:** ideal for assembly line, industry and multipurpose.**Working stretch:** <1.5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
1.5	115	250
2	160	250
3	235	250
4	550	250
5	800	250
6	1000	200
8	2000	200
10	2650	200
12	2783	200
14	5300	150

\*Other colours on request.







# 08 Multipurpose





## Super Round

REF. 00360

MULTIPURPOSE

**Construction:** double braided / 1 to 12mm: 16-plaited 1:1.

**Core:** Polyester HT.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** flexible, doesn't get stiff and resistant to abrasion.

**Recommended use:** perfect rope for nautical uses, fishing, hardware and industry.

**Working stretch:** <5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
1	25	250
1.5	50	250
2	90	250
2.5	130	250
3	170	250
3.5	225	250
4	340	250
4.5	410	250
5	490	250
6	600	200
8	900	200
10	1500	200
12	2200	200



White

## Polyester Braided Color

REF. 00141

MULTIPURPOSE

**Construction:** simple braided / 1 to 12mm: 16-plaited 2:2.

**Composition:** Spun-dyed Polyester HT with UV protection.

**Features:** high resistance to UV, very flexible and doesn't get stiff.

**Recommended use:** ideal for nautical uses, fishing, hardware and industry.

**Working stretch:** <10%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
1	35	250
1.5	50	250
2	90	250
2.5	130	250
3	150	250
4	280	250
5	450	250
6	640	200
8	1100	200
10	1700	200
12	2200	200



White



Yellow



Turquoise



Black



Red



Pistachio



Grey



Orange



Beige



Brown



Navy

\*Other colours and lengths on request.

## Fender Rope

REF. 00740



Black

**Construction:** Simple braided of spun-dyed Polyester HT with UV protection. Easy handling thanks their special threat torsion and easy to splice.



Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
8	770	200
10	1078	200
12	1485	200

\*Other colours on request.

## Xaloc Multipurpose

REF. 00730

MULTIPURPOSE



White/Blue

**Construction:** simple braided / 5 to 12mm: 16-plaited 2:2.

**Composition:** Spun-dyed Polyester HT with UV protection.

**Features:** soft texture and minimum space.

**Recommended use:** perfect for anchoring, fishing, fenders and multipurpose.

**Working stretch:** <8%.




Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
5	235	250
6	580	200
8	700	200
10	980	200
12	1350	200

\*Other colours on request.

## Liferaft Rope

REF. 00100



White

**Construction:** Flat tubular Polyester HT braided, produced in 32-plaited 1:1. Rope approved by Textile testing and research Laboratory of Catalonia (Spain).

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
14	1474	300
22	2186	300

\*Other lengths on request.



## Floating Haytex

REF. 992PC

FLOATING



**Construction:** double braided / 6 to 7mm: 16-plaited 1:1 - 8 to 18mm: 32-plaited 2:2.

**Core:** Haytex® HT.

**Cover:** Haytex® HT and UV protection.

**Features:** easy handling, high resistance, minimum space and 100% floatability.

**Recommended use:** excellent for anchoring sport fishing and multipurpose.

**Working stretch:** <8%.



Orange

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
6	690	200
7	932	200
8	1200	200
10	1700	200
12	2400	200
14	3600	150
16	4300	100
18	5800	100

\*Special length from 200mts on request.

## Ski Nautic

REF. 00150

FLOATING




**Construction:** simple braided / 4 to 14mm: 16-plaited 2:2.

**Composition:** monofilament Polyethylene with UV protection and seawater treatment.

**Features:** floating, easy to handle and to splice.

**Recommended use:** ideal as a water-ski rope, floating lines, fishing and multipurpose.



Orange/Yellow



Yellow/Orange



Orange



Yellow



White



Black

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	230	250
5	340	250
6	410	200
7	600	200
8	720	200
10	1150	200
12	1550	200
14	2040	150

\*Other diameters on request.

## Shock-Cord

REF. 00910/00911

MULTIPURPOSE



White/Blue



White



Black

**Construction:** high quality latex / 3 to 10mm: 16-plaited 1:1 - 12mm: 24-plaited 1:1.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** round, high resistance to abrasion and UV protection.

**Recommended use:** perfect for topping lift, awning and multipurpose.

**Standard elasticity:** 100%.



REF. 00910



REF. 00911

Ø MM	BREAKING STRENGTH (KG)	LENGTH(MTS)
3	40	100/200
4	105	100/200
5	120	100/200
6	194	100/200
7	230	100/200
8	280	100/200
10	350	100
12	410	100

\*Special elasticity on request.

## Shock-Cord Reflectante

REF. 00917

MULTIPURPOSE



Black/Grey



Navy/Grey



Red/Grey



Orange/Grey



Turquoise/Grey

**Construction:** high quality latex / 4 to 10mm: 16-plaited 1:1.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** night vision for its reflective line, round and good resistance to abrasion.

**Recommended use:** excellent for night use and kayaks.

**Standard elasticity:** 100%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	100	100/200
5	115	100/200
6	184	100/200
8	270	100/200
10	340	100

\*Other colours on request.



## Elastic Color

REF. 00915

MULTIPURPOSE

**Construction:** high quality latex / 3 to 10mm: 16-plaited 1:1.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** round, high abrasion resistant and UV protection.

**Recommended use:** perfect for topping lift, awning and multipurpose.

**Standard elasticity:** 3 to 6mm: 150% / 7 to 10mm: 100%.


Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
3	40	100/200
4	105	100/200
5	120	100/200
6	194	100/200
7	230	100/200
8	280	100/200
10	350	100

\*200% elasticity up to 5mm on request.

\*Other colours on request.




Pistachio/Orange




Turquoise/Orange



Fuchsia/Lilac



Lemon/Turquoise



Orange/Lemon



Navy/Grey



Lemon



Turquoise



Red



Grey

## Sandow Color PP

REF. 00920

MULTIPURPOSE

**Construction:** high quality latex / 3 to 10mm: 16-plaited 1:1.

**Cover:** Polypropylene HT with UV protection.

**Features:** round, high resistant to abrasion and UV protection.

**Recommended use:** ideal for covers, hammock, awning and multipurpose.

**Standard elasticity:** 100%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
3	35	100/200
4	65	100/200
5	100	100/200
6	140	100/200
7	187	100/200
8	200	100/200
10	240	100



Blue



Green



Lilac



Fuchsia



Yellow

## Lead Rope

MULTIPURPOSE

REF. 007-N



Black

**Construction:** double braided.

**Cover:** Polyester HT, spun-dyed black colour with UV protection and special torsion.

**Core:** Braided rosary lead with Elastane thread type Lycra® for safety and lead protection.

**Recommended use:** multipurpose for nautical use, ports, fishing, and other applications.

**Ø mm:** from 6 to 12

Ø MM	LENGTH (MTS)	WEIGHT/MT
6	200	42g
8	100	84g
10	100	126g
12	100	168g

\*Other colours on request.



## Textile Shackle

MULTIPURPOSE

REF. 01660



**Composition:** Dyneema® SK-78.

**Diameters:** 4 to 14mm.

**Features:** easy assembly, long lasting and fastener guaranteed under load.

10 times lighter than steel.

**Recommended use:** excellent for nautical uses and industry.

Ø MM	BREAKING STRENGTH (TN)	MAXIMUM WORKING LOAD (TN)
4	1	0.5
5	1.5	0.75
6	2	1
8	4	2
9	5	2.5
10	6	3
12	8	4
14	10	5



Dyneema®

REGATTA HSS  
Heat Stretch System

REGATTA CS  
Coating System



# 9 Rigging Service





REF. 20012



REF. 20013



REF. 20014



REF. 20012

REF. 20012



REF. 20017



REF. 20015



REF. 20016







REF. 20021



REF. 20011



REF. 20018




REF. 20020



REF. 20019





# 10

Safety Nets  
Assorted Boxes  
Threads and Crafts  
Sports  
Others





## Stanchion Net

REF. 00999

Nylon® HT Polyamide net made with braided thread of 3mm.

Excellent fixation of the knot.

**Net:** 50mm - Height: 60cm - Length: 50mts

**Available colours:** white and black.

**Breaking strength:** 1600kg/m<sup>2</sup>.

\*Other diameters and lengths on request.



## Catamaran Net

REF. 01080

Nylon® HT Polyamide net made with braided thread of 4mm.

Excellent fixation of the knot.

**Net:** 30mm.

**Available colours:** White and black.

\*Production for any kind of catamaran.



## Net Topped

REF. 60003

Nylon HT polyamide net constructed with 3mm braided wire.

Excellent fixation to the knot.

**Mesh:** 50 mm – height: 60 cm – length: 50mts

**Available colours:** black and white.

**Breaking strength:** 1100 kg/m<sup>2</sup>



## Bird Net

REF. 60002

1 mm polyethylene net, special pigeons.

**Mesh:** 60mm (available mesh 50mm)

**Available colours:** crystal

**Breaking strength:** 150 kg/m<sup>2</sup>

## Assorted Boxes



### Dyneema Fishing

Dyneema®

REF. 992FC

Dyneema® SK-78 rope for optimist, dinghy and multipurpose.  
High resistance and low stretch.  
Wide range of colours available.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
1.5	80	10 X 50
2	195	10 X 20
3	365	10 X 10



### Dyneema Color

Dyneema®

REF. 97500

Dyneema® SK-78 rope for optimist, dinghy and multipurpose.  
High resistance and low stretch.  
Wide range of colours available.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
1.5	47	10 X 50
2	120	10 X 20
3	280	10 X 10



### Bensity Competition

Dyneema®

REF. 99200

Dyneema® SK-78 rope for optimist, dinghy and multipurpose.  
High resistance and low stretch.  
Wide range of colours available.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
1.5	120	10 X 50
2	200	10 X 20
3	280	10 X 10





## Classic Line

REF. 12760

Polypropylene rope for crafts and DIY.

Long life and UV protection.

Available colour: natural hemp.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
3	-	6 x 10



## Dyna Speed SK-78

Dyneema®

REF. 17000

Dyneema® SK-78 rope for dinghy, technical use and multipurpose.

High resistant to abrasion and UV protection.

Available colours: red, grey, blue, yellow, silver and neon green.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
2	480	6 X 30
3	1125	6 X 15
4	1860	6 X 10



## Vectran Virginia

Vectran®

REF. 19600

Vectran® rope for dinghy and multipurpose.

High performance rope, low stretch and long life.

Available: mottled colours.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
1.5	150	10 X 50
2	200	10 X 20
3	380	10 X 10

# Assorted Boxes

Polyester HT rope for dinghy, multipurpose and crafts.  
Wide range of colours available.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
2	85	18 x 25
3	145	12 x 25

\*Other diameters on request.



**Fluor**  
REF. 50003



**Arena**  
REF. 51100



**Ola**  
REF. 51400



**Fluor Solid Colors**  
REF. 51800



**Summer**  
REF. 52200



**Marbella**  
REF. 07019P



**Coral**  
REF. 02230



**Yuca**  
REF. 02029P



Crafts

Polyester TEX rope with soft touch for crafts.  
Wide range of colours available.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
2	-	18 x 25
3	-	12 X 25



Diente de León

REF. 500T-DL



Solid Colors

REF. 500T-CL



Arcoiris

REF. 500T-AI



Combi

REF. 500T-196

## Threads



## Threads

REF.	Ø MM	N° OF SPOOLS	CONSTRUCTION	TREATMENT	COLOUR
11001	1.0	5 X 30	Plaited	Unwaxed	White
-	1.5	5 X 20	Plaited	Unwaxed	White
-	1.5	5 X 20	Plaited	Intensely waxed	White
-	1.2	5 X 30	Twisted	Intensely waxed	White
11006	0.5	20 x 30	Twisted	Intensely waxed	White
11007	1.2	20 x 30	Plaited	Intensely waxed	White
11008	1.5	20 x 20	Plaited	Intensely waxed	White
11011	1.0	20 x 30	Plaited	Intensely waxed	White
11012	1.5	20 x 20	Plaited	Unwaxed	Multicolour*
11013	1.5	20 x 20	Plaited	Intensely waxed	Multicolour*
11018	1.5	20 x 20	Plaited	Unwaxed	Black
11019	1.5	20 x 20	Plaited	Intensely waxed	Black

\*Multicolour: black, navy, green, red and yellow.  
Whipping twine for nautical uses, industry and multipurpose.  
Intensely waxed and unwaxed.

## Technical Threads for Nautical uses, Industry and Multipurpose

REF. 11014 waxed / REF. 11015 unwaxed



High quality braided thread in Polyester HT.

**Diameter:** 1mm.

**Bobbins:** 250 and 500mts.

**Colours:** white, natural hemp, navy and black.

\*Other colours on request.

## Finishing Ropes

REF. 06016

Simple braided Polyester HT rope.

**Diameters:** 1.5 and 2mm.

**Bobbins:** 100mts.

**Available colours:** navy, beige, white, burgundy, grey, black, red and green bottle.





## Dyneema Compact Line

REF. 78017

**Composition:** Dyneema® SK-78, Regatta Heat Stretch and Coating System.

**Features:** excellent resistance after supporting high loads.

**Available colours:** blue, yellow, white, green, red and grey.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
1.00	165	300
1.30	210	300
1.50	260	300
1.70	310	300
1.90	390	300

Dyneema®

**REGATTA HSS**  
Heat Stretch System

**REGATTA CS**  
Coating System

## Dynaplus SK-99

REF. 99017

**Features:** more tenacity and lower elongation than SK-78

**Composition:** Dyneema® SK-99, Regatta Heat Stretch and Coating System

**Available colours:** white, black and silver grey.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
1.00	196	200
1.25	310	200
1.50	445	200

Dyneema®

## Regatta Kite Protect

REF. RKP/100/200

**Composition:** Polyester TEX.

**Features:** anti-slip treatment and UV protection.

**Available colours:** yellow, blue, green, red and black.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
2,7	50	100/200

## Super Speed

REF. 00019

**Composition:** Dyneema® SK-78 simple braided and pre-stretched.

**Features:** very technical rope and long lasting.

**Available colour:** white.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
3.8	670	100/200
4.5	726	100/200
5	1430	100/200

Dyneema®

Kevlar Serial Line

REF. KSL



**Composition:** braided Kevlar® and Spun-dyed Polyester HT with UV protection.

**Features:** optimal readjustment results and minimum stretch.

**Available colours:** grey fleck + colour: turquoise, fuchsia, orange, green, red, purple, neon yellow, green and black.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
1.25	120	200
1.40	160	200
1.90	200	200
2.15	250	200
2.25	350	200

\*Other diameters and lengths on request.



Compact Plus SK-78

REF. 00023



**Composition:** Dyneema® SK-78, Regatta Heat Stretch, Coating System.

**Features:** compact and great touch.

**Available colour:** silver.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
4	1506	100
5	2212	100
6	2957	100

REGATTA HSS  
Heat Stretch System

REGATTA CS  
Coating System





## Balloons



Regatta Yacht Ropes has developed the latest technological range of ropes for balloons.

These ropes are used by Ultramagic: company leader in research, development and construction of professional balloons.

In all these lines, the latest technologies developed by REGATTA YACHT ROPES - Star Mar, SA are using special fibers with minimum stretch and high resistance to fire such as Kevlar®, Technora®, Polyester, special yarns, among others.

Aramid has been specially treated with our special Regatta Coating System that allows long life and support extreme temperatures between -30°C and 350°C.

REF.	Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)	COLOUR
00300-G*	2.5	180	250	White, White/blue, White/grey
01543-G*	3	250	250	Yellow
00910-G	3	40	100	White/Grey/Yellow
00308-G*	4	550	250	Red, Blue, Green, Grey and Black
-	5	800	250	Red, Blue, Green, Grey and Black
00603-G	5	600	250	White/Grey/Yellow
-	8	1600	200	White/Grey/Yellow
-	14	4500	150	White/Grey/Yellow
00930-G	8	1600	200	Black, Black/Grey
00208-G*	8	2400	200	White, Red, White/Red
00690-G	20	4200	100	White, Green, Red, Blue, Yellow and Black

\*Other diameters, colours and lengths on request.

\*Kevlar® core.

Ibiza Beach

REF. 12100

HALYARD

Dyneema®

**Construction:** double braided / 10.5 and 12.2mm: 32-plaited 1:1.  
**Core:** Dyneema® SK-78 and Haytex® HT plus additional braided Polyester Spun.  
**Cover:** Spun-dyed Polyester HT with UV protection.  
**Working stretch:** <3%.



Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
10.5	3860	200/300
12.2	4900	200/300

\*Other lengths and colours on request.

Super Ibiza Beach

REF. 12200

HALYARD

Dyneema®

**Construction:** double braided / 10.5 and 12.2mm: 32-plaited 1:1.  
**Core:** Dyneema® SK-78 plus additional braided Polyester Spun.  
**Cover:** Spun-dyed Polyester HT with UV protection.  
**Working stretch:** <1.5%.



Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
8.9	3024	200/300
10.5	5000	200/300
12.2	6200	200/300

\*Other colours and lengths on request





## Slings

REF. 01673

We offer to our customers a personalized sling service for nautical and industrial use.

\*Length, diameter and breaking strength on request.

\*Optional: with or without eye.

\*Optional: eye with reinforcement end.



## Car Strap 4x4

REF. 01671

**Composition:** Spun-dyed Polyester HT with UV protection.

**Features:** traction sling with hook.

**Recommended use:** perfect webbing created for towing.



Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
50	2500 ↔	5

\*Other lengths on request.


## Car 4x4

REF. 01672

**Composition:** Spun-dyed Polyester HT with UV protection.

**Features:** flat sling with eye.

**Recommended use:** excellent webbing created for towing.

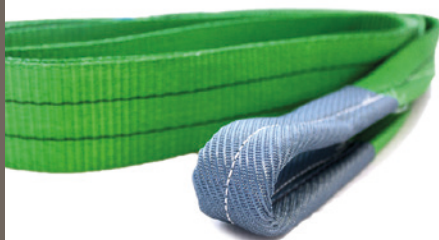

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
50	5000 ↔	5

\*Other lengths on request.

## Decoration

### Rainbow

REF. 06025

**Construction:** double braided/ 6 to 7 mm: 16 plaited 1:1 -8 to 18 mm: 32 plaited 2:2

**Composition:** polypropylene HT

**Cover:** polypropylene HT

**Features:** easy handling, no water absorption, UV protection and maximum resistance.

**Recommended use:** decoration, outside furniture.



## Agrorope

### Olive Wire

REF. CO.Ø.CR

**Construction:** double braided.

**Cover:** polyethylene fiber.

**Features:** following the regulations and declared suitable to be used in the agrorope.

**Recommended use:** to be used in agriculture measuring machines as olives, cherries, tomatoes, fruits and vegetables in general.

**Available diameters:** 6 , 6,5 , 7 , 7,5 , 8 , 9 , 10mm.

\*On request until 27mm.





## Tivoli

REF. 03007

MULTIPURPOSE



Black

**Construction:** double braided / 5 to 14mm: 16-plaited 1:1  
- 16mm:32-plaited 1:1.

**Core:** Polyester HT.

**Cover:** Polyester Spun.

**Features:** excellent grip, nice touch and ideal fixation on the knots.

**Working stretch:** <5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
5	350	250
6	600	200
8	1100	200
10	1900	200
12	2460	200
14	2970	150
16	3600	100

\*Other colours on request.

## Liceo

REF. 03008

MULTIPURPOSE



Black

**Construction:** double braided / 2 to 14mm: 16-plaited 1:1  
- 16mm: 32-plaited 1:1.

**Core:** Polyester HT.

**Cover:** Spun-dyed Polyester HT with UV protection.

**Features:** high elasticity, easy to handle and high abrasion resistance.

**Working stretch:** <5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
2	90	250
3	160	250
4	370	250
5	600	250
6	800	200
8	1480	200
10	2500	200
12	3260	200
14	3800	150
16	4850	100

\*Other colours on request.

# Horse Riding



## Horse

REF. 05010

MULTIPURPOSE

**Construction:** double braided / 12mm 32-plaited 2:2

**Core:** Haytex®HT

**Cover:** Haytex®HT and UV protection

**Features:** soft touch, no water absorption, slight elasticity and lightweight.

**Recommended use:** soft rope perfect for horse headbands and bridging.

**Available diameters:** 12mm.

# Height Work



TÍBET 10,5mm

CE EN 1891



TÍBET 10,5mm

CE EN 1891



HIMALAYA 11mm

CE EN 1891



HIMALAYA 11mm

CE EN 1891

## Semi-Static Rope

REF. 02217 / REF. 02220

REGATTA YACHT ROPES - Star Mar, SA offers semi-static ropes for professional people for height works developed with the most advanced technology following the CE EN 1891 rule.

REF.	REF. 02217 - TIBET
DIAMETER	10.5mm
TYPE	A
BREAKING STRENGTH	2700 daN (kg)
RESISTANCE EIGHT KNOT	1950 daN (kg)
WEIGHT PER METER	65g
% OF THE COVER	38%
AVAILABLE COLOURS	White/Orange/Black, Orange

REF.	REF. 02220 - HIMALAYA
DIAMETER	11mm
TYPE	A
BREAKING STRENGTH	3000 daN (kg)
RESISTANCE EIGHT KNOT	2100 daN (kg)
PESO POR METRO	73g
% OF THE COVER	36%
AVAILABLE COLOURS	White/Black/Grey/Yellow, Navy



## Classic Line 3-S

MULTIPURPOSE

REF. 01277

**Construction:** 3 strands / 6 to 34mm.**Composition:** Polypropylene natural hemp.**Features:** very light and easy to handle.**Recommended use:** special rope for decoration and multipurpose.**Working stretch:** <15%.

Hemp

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
6	505	220
8	912	220
10	1337	220
12	1927	220
14	2500	220
16	2938	220
18	3510	220
20	3943	220
22	4728	220
24	5529	220
26	6400	220
28	7300	220
30	8300	220
32	9200	220
34	10300	220

\*On request until 40mm.

## Arboriculture

### Tree

MULTIPURPOSE

REF. 01640

**Construction:** double braided / 12 to 14mm: 16-plaited 1:1 - 16 to 18mm: 32-plaited 1:1.**Core:** Polyester HT.**Cover:** Spun-dyed Polyester HT with UV protection.**Features:** high abrasion resistance, easy to splice and nice touch.**Recommended use:** for pruning, felling and forest use in general.**Working stretch:** <5%.

Ø MM	BREAKING STRENGTH (KG)	LENGTH (MTS)
12	3260	200
14	3800	150
16	5040	100
18	6600	100

\*Other colours on request.



Black



Red



Green



Burgundy

## ■ Buckle-25PL




REF. 02905



**Composition:** Polypropylene HT and UV protection.

**Features:** endless buckle. High abrasion resistance.

**Recommended use:** for small loads and DIY.

Ø MM	BREAKING STRENGTH (KG)	PACKAGING 
25	30 	2 pieces of 2mts
25	30 	1 piece of 5mts

## ■ Buckle-35PL




REF. 02908



**Composition:** Polypropylene HT and UV protection.

**Features:** endless buckle. High abrasion resistance.

**Recommended use:** for small loads and DIY.

Ø MM	BREAKING STRENGTH (KG)	PACKAGING 
35	40 	1 piece of 3mts
35	40 	1 piece of 5mts

## ■ Lashing-25





REF. 02910 - REF. 02915



**Composition:** Polyester HT and UV protection.

**Features:** endless lashing or with closed hook. High abrasion resistance.

**Recommended use:** for small loads and DIY.

REF.	Ø MM	BREAKING STRENGTH (KG)	PACKAGING 
02910	25	800 	1 piece of 5mts
02915	25	800  400 	1 piece of 5mts

## ■ Lashing-35





REF. 02930 - REF. 02935



**Composition:** Polyester HT and UV protection.

**Features:** endless lashing or with closed hook. High abrasion resistance.

**Recommended use:** for small loads and DIY.


REF.	Ø MM	BREAKING STRENGTH (KG)	PACKAGING 
02930	35	2000 	1 pieza de 6mts
02935	35	2000  1000 	1 pieza de 6mts



## ■ Lashing - 50

REF. 02940


**Composition:** Polyester HT and UV protection.**Features:** lashing with closed hook. High abrasion resistance.**Recommended use:** for high loads and professional use.

Ø MM	BREAKING STRENGTH (KG)	PACKAGING 
50	4000 ↗ 2000 ↔	1 piece of 9mts

## □ ■ Buckle - 25 Inox

REF. 02800


**Composition:** Polyester HT and UV protection.**Features:** endless buckle and high abrasion and corrosion resistance.**Recommended use:** for small loads and DIY.

REF.	Ø MM	BREAKING STRENGTH (KG)	PACKAGING 
02800/25-3	25	250 ⤴	1 pieza de 3mts
02800/25-5	25	250 ⤴	1 pieza de 5mts

## □ ■ ■ Lashing-25 Inox

REF. 02920 - REF. 02925

**Composition:** Polyester HT and UV protection.**Features:** endless lashing or with closed hook. The stainless steel of both pieces (turnbuckle and closed hook) gives a high abrasion and corrosion resistance.**Recommended use:** for small loads and DIY.

REF.	Ø MM	CARGA DE ROTURA (KG)	PRESENTACIÓN 
02920	25	800 ⤴	1 piece of 5mts
02925	25	800 ↗ 400 ↔	1 piece of 5mts







## Lashing - 35 Inox

REF. 02960 - REF. 02965

**Composition:** Polyester HT and UV protection.

**Features:** stainless and endless lashing or with closed hook. High abrasion and corrosion resistance.

**Recommended use:** for small loads and DIY.

REF.	Ø MM	BREAKING STRENGTH (KG)	PACKAGING 
02960	35	2000 	1 piece of 6mts
02965	35	2000  1000 	1 piece of 6mts






## Lashing With Closed Hook - 50 Inox

REF.02970

**Composition:** Polyester HT and UV protection.

**Features:** stainless lashing with closed hook. High abrasion and corrosion resistance.

**Recommended use:** for small loads and DIY.

Ø MM	BREAKING STRENGTH (KG)	PACKAGING 
50	4000  2000 	1 piece of 10mts



## Regatta Webbing Box

REF.52500




Endless lashing webbing with buckle.

**Composition:** Polyester HT and UV protection.

**Available colours:** orange, turquoise and black.

\*Optional: Regatta Webbing Box with the same length.

Ø MM	BREAKING STRENGTH (KG)	WEBBING LENGTH (MTS)
25	250	8 units x 2mts
25	250	8 units x 3mts
25	250	8 units x 4mts

REF.	Ø MM	BREAKING STRENGTH (KG)	WEBBING LENGTH (MTS)
 52500/2	25	250	24 units x 2mts
 52500/3	25	250	24 units x 3mts
 52500/4	25	250	24 units x 4mts





### Regatta Needle Splicing Set

REF. 02007-4000

4 tools to splice made of steel.

Between 4 and 14mm.

To be used in twisted and braided ropes.

Packaging: in a practical plastic tube.



### Regatta Bodkin

REF. 02007-3000

Tool to splice 3 and 8 strands ropes.

Up to 12mm.

REF. 02007-2000

Tool to splice 3 and 8 strands ropes.

Up to 14mm.



### Regatta Rope Cutter

REF. 01591

Tool for sealing and cutting ropes and synthetic cords by heat.

Professional cut for all sizes of synthetic ropes.

Cutting width: 21mm.



### Regatta Meter Counter

REF. 00592

High quality tool with a firm construction.

Can be calibrated for ropes and lines between 3 and 20mm of diameter.



### Regatta Special Sewing Needles

Special tools tested to splice. It can be used without gloves and saves time and effort when sewing ropes.

**Ref. 02007-1301:** wooden handle. Special needles for mini loops.

**Ref. 02007-1304:** wooden handle. Special needles for mini loops.

**Ref. 02007-1303:** Diameter: 1.78mm / Long: 76mm

**Ref. 02007-1305:** Diameter: 3mm / Long: 175mm.

**Ref. 02007-1306:** Diameter: 13 to 19mm. Set of 5 needles for hand sewing.



### Wall Display

REF. 00135-1000

Wall exhibitor with a very stable construction.

**Measures:**

- High: 200cm. Optional: extensible up to 280cm
- 5 bars of 95cm
- Width: 100cm
- Depth: 25cm



### Double Display

REF. 00070


Attractive display that allows to present the maximum quantity of ropes in a minimum space.

No installation required in any supporting point.

**Measures:**

- High: 200cm. Optional: extensible up to 280cm
- 10 bars of 95cm
- Width: 100cm
- Depth: 55cm



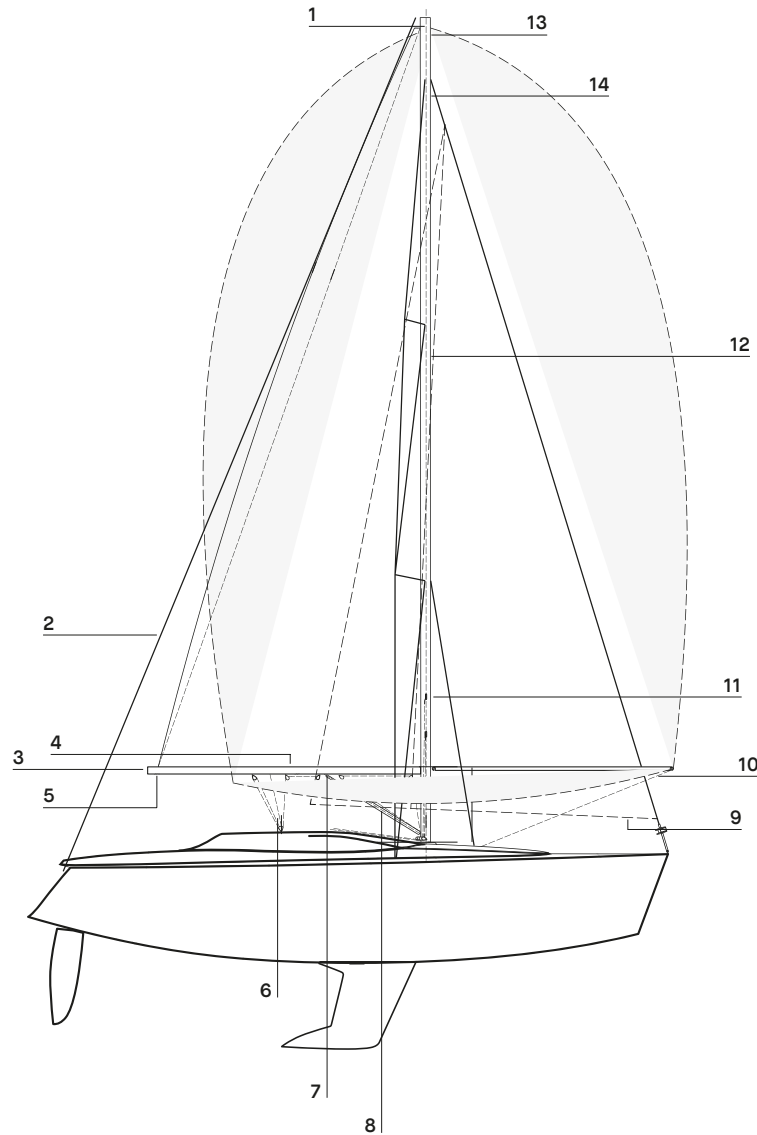

#### 1. Main Halyard

- Ocean Race 11
- Platinum-90 12
- Oceanic Vectran 13
- Marina-Pro 17
- Atlanta 24

#### 2. Backstay

- Atlanta 24
- Vectran Virginia 25
- Excel Vectran 45
- Dyna Speed 44

#### 3. Boom Topping Lift

- Racing 25
- Bensy Competition 26

#### 4. Spinnaker Sheet

- Platinum-90 12
- Marina-Pro 17
- Racing 25
- Dynatec 43
- Super Hobie F-18 44

#### 5. Outhaul

- Atlanta 24
- Vectran Virginia 25
- Marine Plus 43
- Dyna Speed 44

#### 6. Main Sheet

- Marina-Pro 17
- Racing 25
- Dynatec 43
- Super Hobie F-18 44

#### 7. Genoa Sheet

- Platinum-90 12
- Marina-Pro 17
- Bensy Competition 26
- Dynatec 43
- Super Hobie F-18 44

#### 8. Kicking Strap

- Marina-Pro 17
- Racing 25
- Marine Plus 43
- Dyna Speed 44

#### 9. Pole Down

- Oceanic Vectran 13
- Marina-Pro 17
- Racing 25

#### 10. Spinnaker Guy

- Racing 25
- Bensy Competition 26
- Vectran Virginia 25

#### 11. Cunningham

- Racing 25
- Atlanta 24
- Dyna Speed 44

#### 12. Pole Up

- Regatta Reflective 16
- Marina-Pro 17
- Racing 25
- Atlanta 24


#### 13. Spinnaker Halyard

- Marina-Pro 17
- Burton-SK90 18
- Racing 25
- Bensy Competition 26

#### 14. Genoa Halyard

- Platinum-90 12
- Oceanic Vectran 13
- Marina-Pro 17
- Burton-SK90 18
- Atlanta 24

\*Within the line of recommended ropes there is a wide range of our products for the same use.

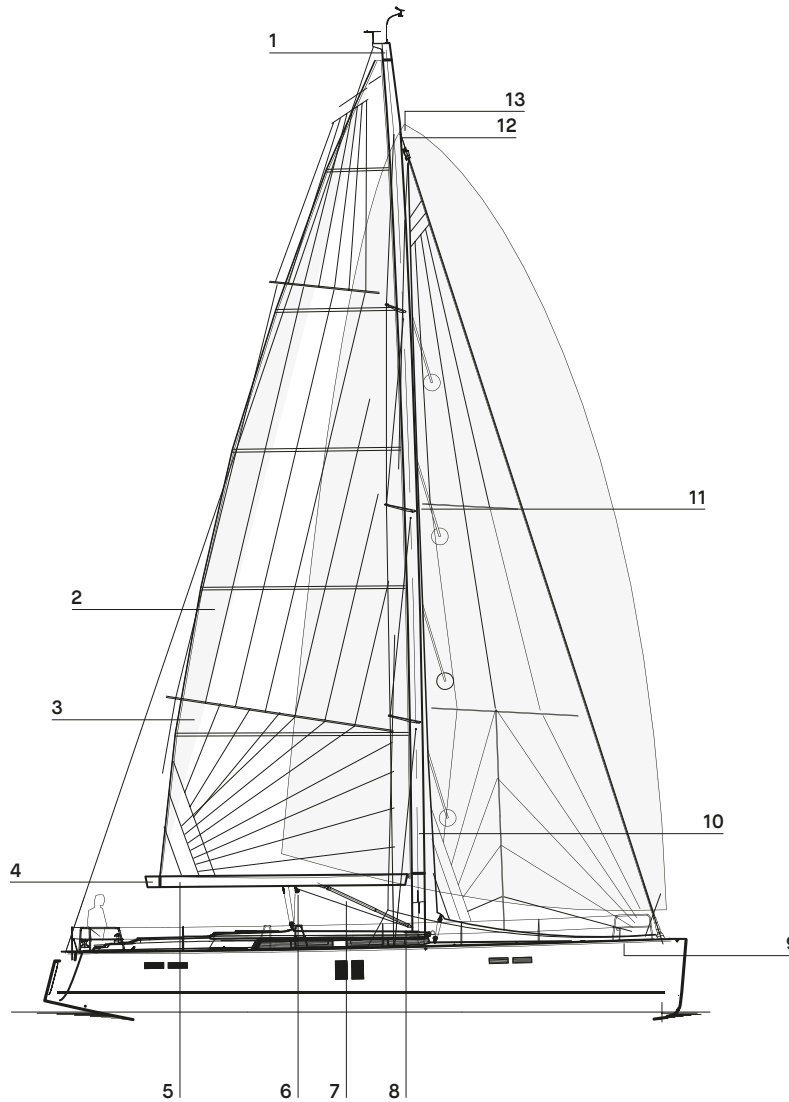

## 1. Main Halyard

- Atlanta 24
- Black Sea 35
- Harbour 36

## 2. Boom Topping Lift

- Betsy Competition 26
- Star Cup 38
- Star Cup Color 38

## 3. Boom Topping Lift

- Eyre 33
- Titanic Color 34
- Star Cup 38
- Star Cup Color 38

## 4. Spinnaker / Asymmetrical

- Star Cup 38
- Star Cup Color 38

## 5. Outhaul

- Eyre 33
- Titanic 34
- Titanic Color 34

## 6. Main Sheet

- Star Cup Color 38
- Star Cup 38
- Top Sea 40
- Regatta Color 39

## 7. Kicking Sheet

- Eyre 33
- Titanic 34
- Titanic Color 34

## 8. Genoa Sheet

- Star Cup Color 38
- Regatta Color 39

## 9. Pole Down

- Betsy Competition 26
- Eyre 33
- Titanic 34
- Titanic Color 34

## 10. Cunningham

- Darwin 33
- Titanic Color 34
- Star Cup 38
- Star Cup Color 38

## 11. Pole Up

- Darwin 33
- Titanic Color 34
- Star Cup 38
- Star Cup Color 38

## 12. Spinnaker Halyard

- Racing 25
- Black Sea 35
- Windy 36
- Harbour 36

## 13. Genoa Halyard

- Racing 25
- Titanic 34
- Titanic Color 34

\*Within the line of recommended ropes there is a wide range of our products for the same use.





## Notes









## REGATTA YACHT ROPES

Torrent de Ca l'Amat, 86  
Polígon Industrial Els Garrofers  
08348 Cabriels, Barcelona (Spain)  
T. +34 93 752 17 64  
M. +34 687 418 999

[regatta@cabosregatta.com](mailto:regatta@cabosregatta.com)  
[www.cabosregatta.com](http://www.cabosregatta.com)

